DIGITUS®

Enjoy connections. Live.

MAIN CATALOG
2009-I

USB Webcam „Snake" page 4

Outdoor Speed Dome Camera page 52

HDMI switches page 61

Table of content

Multimedia

Webcams 4
USB mikroskope, webcams 5
DVB-T receiver, video grabber, graphicadapter 6
Speaker sets 7
MP3 player accessories 8
Bluetooth products 9
Microphones, headphones 10
Keyboards 12
Mice 13

Accessories

USB hubs 15
USB card reader 16
USB frontpanels 17
PCI Interface cards 18
PCI express Interface cards 19
ExpressCard interface cards 21
Cardbus Interface cards 22
External 2.5“ enclosure 23
External 3.5“ enclosure 24
Storage HDD enclosure 25
USB HDD docking station, IDE and SATA adapter 26
USB data security devices 27
USB sharing switches 28
USB adapter 29
Floppy, USB-docking-station, Notebook cooler pad 30
Notebook lamps and power supply 31
Notebook bags 32
CD and DVD storage 34
TFT display arms and fixations 36

Network

Wireless LAN products, 300Mbps 38
Wireless LAN products, 54Mbps 40
Wireless LAN antennas 42
Powerline Adapter 44
NAS server and LAN HDD enclosure 45
Fast Ethernet products and router 46
Fast Ethernet 8-, 16- and 24- port switches 47
Fast Ethernet print server 48
Wireless print server 49
Gigabit solutions/switches 50
Gigabit switches 51
Internet/network cameras 52
CAT5e patch cables 54
CAT 6 patch cables 55
Twisted pair patch-, & installation cables 56
Network outlets and patchpanels 57
19“ Network Cabinet Systems 58
Network outlets & patchpanel 60

Datacom

Video solutions 61
Pocket and compact KVM switches 64
Desktop KVM switches 65
KVM switches and extender 67
Desktop KVM switches 68
19“ LCD-consoles 70

Cables

Premium cables 71
Premium cables & Adapter 72

Glossary 73

DIGITUS® USB Webcam "Snake", autofocus

- Unique flexible gooseneck design, for convenient notebook and desktop use
- High quality CMOS sensor with 1,3 Megapixel
- Up to 5,2 Megapixel software interpolation
- High quality optical glass lens
- Autofocus from 8cm to infinity
- Auto exposure and white balance
- Video capture with up to 30fps, MPEG4 format
- Built-in microphone
- Button for direct picture and video capture
- Including easy to use and functional utility software
- USB 2.0 connection
- Supports driverless installation for Microsoft Windows® XP / Vista

Software

250340 / DA-70817
USB webcam

DIGITUS® USB Webcam "Tiny"

- Extreme compact and tiny design for notebook and desktop use
- High quality CMOS sensor with 1,3 Megapixel
- Up to 5,2 Megapixel software interpolation
- High quality optical glass lens
- Manual focus from 8cm to infinity
- Auto exposure and white balance
- Video capture with up to 30fps, MPEG4 format
- Built-in microphone
- Including easy to use and functional utility software
- USB 2.0 connection
- Supports driverless installation for Microsoft Windows® XP/Vista

Software

250333 / DA-70816
USB webcam

DIGITUS® USB Webcam "Easy"

- Compact design for notebook and desktop use
- High quality CMOS sensor with 300K Pixel
- Up to 3,2 Megapixel software interpolation
- High quality optical glass lens
- Manual focus from 8cm to infinity
- Auto exposure and white balance
- Built-in microphone
- Free angle adjustable ball joint
- Button for direct picture and video capture
- Including easy to use and functional utility software
- USB 2.0 connection
- Supports driverless installation for Microsoft Windows® XP/Vista

Software

250326 / DA-70815
USB webcam

DIGITUS® Microscope camera with built-in light

The universal digital microscope camera shows objects in "live view" with up to 200x magnification on the computer screen. The built-in bright LED lighting guarantees for sharp and brilliant pictures.

- Universal microscope camera for the computer with built-in white and bright lighting
- Magnification continuous 10-200x
- Screen capture resolution 640x480 pixel
- "Live view" with up to 30fps
- USB 1.1/2.0 interface
- 1,8m USB Cable length
- Ideal for business and hobby e.g. for industrial inspection like textile and printing, for skin and scalp examination, for stamp, coin and gem collectors, for science and learning. As reading aid.
- Incl. desktop stand, manual and capture software on CD-ROM
- For Windows®-PC operating WIN98SE/ME/2000/XP/Vista and Mac

200154 / DA-70350
USB microscope camera

DIGITUS® USB webcam

- Manual adjustable focus, automatic whitebalance, automatic exposure
- Resolution: up to 1,3 Megapixel, 1600x1200, 1280x960, 800x600, 640x480, 352x288, 320x240, 176x144, 160x120
- Framerates: up to 30fps
- Color depth: 32Bit
- JPEG-compression integrated
- Operating system: Windows® 2000/XP/Vista

229186 / DA-70812-1
USB webcam

DIGITUS® USB webcam

- Compliant to USB 2.0 specification
- 6 LED's for ambient light
- Integrated microphone
- Manuel adjustable focus, automatic whitebalance, snapshot function, automatic exposure
- Resolution: 300k Pixel, 640x480 (VGA), 352x288, 320x240, 176x144, 160x120
- Framerates: up to 30fps
- Color depth: 32bit
- JPEG-compression integrated
- Operatin System: Windows® 2000/XP/Vista

194712 / DA-70811
USB 2.0 webcam with 6 LED's and clip

DIGITUS® Digital DVB-T mini receiver for USB port

The portable DVB-T-Receiver with USB2.0 interface is designed especially for Notebooks. The mini size DVB-T-Receiver does not require an additional external electricity supply and, after the attachment of an antenna, transforms a PC or Notebook into a receiver for digital, terrestial television.
In addition to the rendering of TV programmes the USB mini Receiver makes available extensive video recorder functions, video text reception and a digital programme overview.

- Supports the DVB protocol(ETS 300 744)
- Digital TV reception
- Digital video recording in real time(DVR) and scheduled
- Electronic program guide(EPG)
- Automatic channel scanning 6/7/8 M
- Videotext
- MPEG-II decoder
- Compact dimensions(79x26x13mm)
- Remote control
- Input resistance: 75Ohm DIN
- Reception frequency: VHF: 174～230MHz/ UHF: 470～862MHz-tuning area
- System Requirements:Windows® 2000 (SP4),Windows® XP(SP1), Vista

228790 / DA-70781-B
DVB-T USB 2.0 Mini Receiver

DIGITUS® USB 2.0 audio adapter

- Compliant with USB 2.0 specification
- Compliant with USB Audio Device Class Specification v1.0
- Plug and Play, no extra diver needed
- Drive 2CH speakers direclty
- 16bit audio DAC with earphone phone amplifier
- 16bit ADC input with microphone boost
- LED indicator work status
- Compatible with Windows® 2000/XP/Vista, Mac OS9/OS10

233879 / DA-70777
USB 2.0 audio adapter

DIGITUS® USB 2.0 sound adapter with 5.1 effect

- USB 2.0 high-speed sound card for the USB port
- Virtual 5.1 effects
- Integrated high performance 16bit audio converter
- Audio connection is via a 3,5mm stereo jack
- Supports Win 98SE/ME/2000/XP and Mac OS 9, OSX

210580 / DA-70770-A
USB 2.0 sound adapter with 5.1 effect

DIGITUS® High resolution video grabber with MPEG 4 support

- Video input: 1xRCA composite, 1xS-Video.
- Video system: NTSC, PAL and SECAM multi system support
- Audio input: for WinXP, go through USB; For Win2000, go through sound card.
- Motion capture: AVI /MPEG format up to 720x480, NTSC and PAL up to 720x576, MPEG 4 format up to 320x240 resolution
- Still image capture : BMP/JPG/TIF/PCX/PCT/TGA/WMF file format
- Performance: up to 25fps at 720x576 for PAL, 30fps at 720x480 for NTSC
- Power Source: 5V DC, max. 300mA through USB port
- Video Works 6 and digital converter software included
- OS Support: Windows® XP from SP1, Windows® 2000 from SP 3, Vista

195214 / DA-70820
High res-videograbber

DIGITUS® High performance USB 2.0 graphic adapter

Users can now easily have extended desktops for added productivity. USB docking stations can now replicate the SVGA outputs in addition to the standard ports. Notebook users now have the ability to use dual displays.

- Extend your desktop workspace(dual display support)
- Mirror function
- Compliant with USB specifications 2.0
- Plug & Play compliant
- Compliant with EHCI specification
- Built-in a high quality 3D engine
- High performance 2D accelerator
- Display memory: 8MB SDRAM
- Resolution up to 1680x1050, color depth up to 32bit
- Windows® 2000/XP/Vista32 compatible

195665 / DA-70830
USB 2.0 to VGA converter

Enjoy connections. Live.

DIGITUS® Stereo speaker set 360W PMPO

- Stereo Multimedia speaker
- Total output power: 6Watts
- Front access power on/off & volume control, LED indicator
- Magnetic shielded, headphone jack for private listening
- Speaker driver unit: 2x4" speaker a 3W
- Frequency response range: 80Hz-18KHz
- Product dimension: 81x207x81mm

190066 / DA-10240
Stereo multimedia speaker set 360W PMPO

DIGITUS® Stereo speaker set

- 2.0 Multimedia speaker
- Total output power: 2Watts
- Front access power on/off & volume control, LED indicator
- Magnetic shielded
- Speaker driver unit: 2 speaker a 1W
- Frequency response range: 30Hz-20KHz
- Product dimension: 75x95x200mm

210603 / DA-10241
Stereo speaker set

DIGITUS® 2.1 mini sub-woofer system 450W PMPO

- 2.1 Multimedia speaker, wooden case
- Total output power: 14Watts
- 2.1 Mini Sub-Woofer system with wired control
- Speaker driver unit:
  Woofer: 3" speaker with 10W
  Satelite: 2x2.25" speaker a 2W
- Frequency response range: 30Hz-20KHz
- Product dimension:
- Woofer: 130x145x161mm
- Satellite: 80x95x68mm
- Accessories: 3,5mm stereo plug connection cable

190073 / DA-10250
2.1 mini sub-woofer system 450W PMPO

DIGITUS® 2.1 sub-woofer system 1500 PMPO

- 2.1 Multimedia speaker, wooden case
- Total output power : 10Watts(1500Watt P.M.P.O)
- Power On/Off, Control on Woofer
- Power LED, Standby control, volume and bass control via cable remote control
- Speaker driver unit:
- Woofer: 3" speaker with 6W
- Satelite: 2x4" speaker a 4W
- Frequency response range
- Woofer: 20Hz-200Hz
- Satellite: 100Hz-20KHz
- Product dimension:
- Woofer: 130x150x150mm
- Satellite: 100x90x160mm
- Accessories : 3,5mm stereo plug connection cable

210634 / DA-10251
2.1 sub-woofer system

DIGITUS® 5.1 home theater system 950W PMPO

- 5.1 Surround Sub-Woofer multimedia speaker, wodden case
- Total power output: 27 Watts
- On/off, Volume, Bass, Balance Control by an external control box
- Main unit: 3" speaker with 10W, Center: 3" speaker with 5W
  Front 2x3" speaker a 3W
  Rear 2x2.25"speaker a 3W
- Frequency response range: 30Hz-20KHz
- Product dimensions:
  Main unit (150x170x17mm),
  Center (90x105x84mm)
  Front (90x105x84mm)
  Rear (80x95x68mm)
  Control Box (160x55x180mm)
- Accessories: 3,5mm stereo plug connection cable and cable set

190080 / DA-10260
5.1 home theater system 950W PMPO

DIGITUS® Portable stereo speaker set for iPod and MP3 player, foldable

- R.M.S (THD 10%) 0.8*2W
- Driver unit: 2" * 2
- Max. output: 2W
- Frequency response range: 200Hz-12KHz
- AC/DC adapter (not extent of delivery) or 4x AAA size batteries
- S/N ratio = -69dB
- Input sensitivity: 640mV
- Input impedance: 10KOhm
- Impedance: 4Ohm
- Product dimensions (open) WxDxH: 192x52x62mm
- Product dimensions (folded) WxDxH: 104x 62x62mm

210597 / DA-10280-A
Portable stereo speaker set for iPod and MP3 player, foldabl

DIGITUS® Stereo multimedia headset with built-in amplifier

- Built-in amplifier for use as a stereo loudspeaker
- Remote cable operation with volume control and headphone/loudspeaker switch
- Fully-padded earpiece and extra-long cable for optimum wearer comfort
- Microphone with flexible gooseneck
- Power supply for integrated amplifier via USB
- Includes rechargeable battery pack for use of the loudspeaker/amplifier function when on the move
- Technical data:
  Headphone loudspeaker diameter 40mm
  Loudspeaker diameter 50mm
  Impedance 32Ohm
  Loudspeaker frequency range 20Hz-20kHz
  Microphone frequenzy range 30Hz-16kHz
  Microphone sensitivity-60dB
  Amplifier output 2W
  Cable length 2,80m

206514 / DA-10226
Stereo multimedia headset with built-in amplifier

DIGITUS® USB Bluetooth 2.0 EDR tiny adapter

- Bluetooth specification V1.1, 1.2, 2.0 + EDR
- USB 1.1 interface
- Class 2, up to 50 m distance
- USB bus powered
- Communicates with all standard Bluetooth devices
- Supports Microsoft Windows® Vista/Vista 64/XP/XP 64/2000

233442 / DN-3020
USB Bluetooth 2.0 EDR tiny adapter, class 2

233459 / DN-3021
USB Bluetooth 2.1 EDR tiny adapter, class 2+

DIGITUS® Bluetooth audio transmitter

- Bluetooth Audio Transmitter: Plug into your Stereo audio source via audio jack in your MP3 .PSP, PC, TV, DVD player, ipod, home audio system etc.
- Compatible with Bluetooth 1.1 / 1.2 standard
- Data transfer rate up to 732 kbps
- Range up to approx. 15m
- Ultra-compact design
- Rechargeable polymer battery
- Working time up to 6,5 hours
- Automatically pair with Stereo Bluetooth headphone by pressing a button
- Supports A2DP profile
- Size: 52x14x22mm

195702 / DN-3014
Bluetooth audio transmitter

DIGITUS® Bluetooth stereo adapter with earphone

- Crystal clear audio sound effect
- Range up to approx. 15m
- Rechargeable polymer battery
- Standby time up to 180h, workingtime up to 6,5h
- Support MSN, Skype and other internet messenger application, or listening to MP3 and other audio streaming, A2DP support
- Integrated microphone, compatible with most currently available mobile phones
- Re-dial and receive calls without touching your phone
- One switch for pick up and pairing, volume up and down adjustment, easy to click
- Comes with USB charging cable and earphones
- Weight: 20g
- Dimension: 60x26x8mm

233411 / DN-3019
Bluetooth stereo adapter with earphone

DIGITUS® Bluetooth headset

- Compatible with Bluetooth 2.0 standard
- Range up to approx. 10m
- Ultra-compact design
- Rechargeable polymer battery
- Standby time up to 100 hours
- Talk time up to 5 hours
- Compatible with most currently available mobile phones
- Supported Profiles: „Handfree“ and „Headset“
- Audio Gateway (In/Out) for PC, PDA, and mobile phones
- Weight: 7g
- Dimension: 45x11x18mm

233404 / DN-3012
Bluetooth headset

DIGITUS® HQ In-ear-headphones incl. „Plug & Share“ feature

High Quality In-ear-headphones in classic design, for best sound quality and highest wearing comfort.

- Special „Plug & Share“ feature
- Superior sound quality and best wearing comfort
- High-power Neodymium magnet is used to reproduce powerful bass and clear treble sound
- Frequency range: 20~20KHz
- 3,5mm stereo plug, angled
- Power rating: 5mW
- Impedance: 32Ohm
- Sensitivity: 112dB
- Membran diameter: 13mm
- Connection cable 90cm
- Incl. spare earbuds
- Soft carrying pouch supplied

222798 / DA-10230
HQ In-ear-headphones incl. „Plug & Share“ feature

DIGITUS® HQ In-ear-headphones incl. „Plug & Share“ feature

High Quality In-ear-headphones, for best sound quality and highest wearing comfort.

- Special „Plug & Share“ feature
- Superior sound quality
- Closed earphone structure enables powerful bass reproduction
- Comfortable fit by ultra small driver unit and soft silicon earbuds
- High-power Neodymium magnet is used to reproduce powerful bass and clear treble sound
- Frequency range: 20~20KHz
- 3,5mm stereo plug, angled
- Power rating: 5mW
- Impedance: 32Ohm
- Sensitivity: 112dB
- Membran diameter: 13mm
- Connection cable 90cm
- Incl. three different sizes of soft silicon earbuds
- Soft carrying pouch supplied

222804 / DA-10231
HQ In-ear-headphones incl. „Plug & Share“ feature

DIGITUS® MP3 earphone - set

- Large sound volume
- Powerful stereo Sound
- Equillbrated bass-system
- Direct connectable to MP3 Player, portable cassette devices, CD Player, DAT recorders and HiFi systems
- 3,5mm stereo Plug, cable length: 70cm
- 16mm Speaker diameter
- Magnet type: NdFeB
- Frequency reponse: 20-20.000Hz
- Impedance: 32Ohm
- Sensitivity: 83 +/- 3dB
- Max. Power: 3mW

186236 / DA-10224
Earphone - set, black

DIGITUS® MP3 earphone - set

- Large sound volume
- Bilateral laid cable
- Direct connectable to MP3 Player, portable cassette devices, CD Player, DAT recorders and HiFi systems
- 3,5mm stereo Plug, cable length: 60cm
- 15mm Speaker diameter
- Magnet type: NdFeB
- Frequency reponse: 20-20.000Hz
- Impedance: 32Ohm
- Sensitivity: 85 +/- 3dB
- Max. Power: 3mW

186229 / DA-10223
Earphone - set, grey

DIGITUS® Stereo headset with microphone

- Closed, stereo headphones
- Ideal for PC, notebook, internet telephony, VoIP, Games, CD, MP3, DVD
- Volume control
- Light design and soft ear pads for high wearing comfort
- Flexible microphone arm for placement and movement
- Cable length: 2,4m
- 2x3,5mm stereo jack
- Frequency: 8-22kHz
- Impedance: 32Ohms @ 1kHz
- Sensitivity: 105dB/mW
- Microphone: Ø 9x7mm
- Microphone sensitivity: 58dB +/- 2dB

193524 / DA-10225
Stereo headset w. volume control

DIGITUS® Stereo headset with microphone

- Closed, stereo headphones
- Ideal for PC, notebook, internet telephony, VoIP, Games, CD, MP3, DVD
- Volume control
- Light design and soft ear pads for high wearing comfort
- Flexible microphone arm for placement and movement
- Cable length: 2,5m
- 2x3,5mm stereo jack
- Frequency: 20 - 20kHz
- Impedance: 32Ohms @ 1kHz
- Sensitivity: 108dB/mW
- Microphone: Ø 9.7x6.7mm
- Microphone sensitivity: -38dB +/- 3dB

210740 / DA-10228
Stereo headset with microphone

DIGITUS® Multimedia microphone with stand

Compact multimedia microphone with stand, adjustable. Connects via 3.5mm stereo plug.

- Compact multimedia microphone with stand, adjustable
- Condenser microphone
- Frequency range: 50-16000Hz
- Sensitivity: -60dB +/- 3dB (0dB= 1V/μ BAR at 1KHz)
- Operating voltage: 1V-10V (standard = 3V)
- Cable length: 1,8m
- Connector: 3.5mm stereo jack
- Weight: 125g

101017 / DA-10101
Multimedia microphone with stand

DIGITUS® Multimedia microphone with stand

- Compact multimedia microphone with stand, adjustable
- Condenser microphone
- Frequency range: 50-16000Hz
- Sensitivity: -60dB +/- 3dB (0dB= 1V/μ BAR at 1KHz)
- Operating voltage: 1V-10V (standard = 3V)
- Cable length: 1,8m
- Connector: 3.5mm stereo jack
- Weight: 90g

210566 / DA-10102
Multimedia microphone with stand

DIGITUS® Earphone with microphone

- Earphone with built-in, flexible microphone
- Speaker:
  15mm dynamic
  Impedance: 32Ohm
  Sensitivity: 108dB +/- 4dB
  Frequency range: 50-15000 Hz
  Max. input: 30mW
- Microphone:
  Frequency range: 50-16000Hz
  Efficiency: -64dB +/- 3dB
- Miscellaneous:
  Cable length: 1,8m
  Connections: 2x3,5mm jacks
  Weight: 15g without cable

210610 / DA-10200
Earphone with microphone

DIGITUS® Multimedia stereo headset with microphone

- Stereo headset with microphone
- Speakers:
  Impedance: 32Ohm
  Sensitivity: 101dB +/- 4dB
  Frequency range: 100-15000Hz
  Max. input: 100mW
- Microphone:
  Frequency range: 5-16000Hz
  Efficiency: -62dB +/- 3dB
  Operating voltage: 1V-10V(standard=3V)
- Miscellaneous:
  Cable length: 1.8m
  Connections: 2x3.5mm stereo jacks
  Weight: 125g

071808 / DA-10201
Stereo multimedia headset with microphone

DIGITUS® Multimedia stereo headset with microphone

- Stereo headset with microphone(back-head style)
- Speakers:
  30mm dynamic
  Impedance: 32Ohm
  Sensitivity: 101dB +/- 4dB
  Frequency range: 100-15000Hz
  Max. input: 100mW
- Microphone:
  Frequency range: 50-16000Hz
  Efficiency: -62dB +/- 3dB
- Miscellaneous:
  Cable length: 1.8m
  Connections: 2x3.5mm stereo jacks
  Weight: 90g

210573 / DA-10219
Stereo multimedia headset with microphone

DIGITUS® Stereo multimedia headset

- Closed, stereo headset with built in microphone
- Ideal for PC, notebook, internet telephony, VoIP, Games, CD, MP3, DVD
- Volume control
- Light design and soft ear pads for high wearing comfort
- Cable length: 2.5m
- 2x3,5mm stereo jack
- Frequency: 20-20kHz
- Impedance: 32Ohms @ 1kHz
- Sensitivity: 102dB/mW
- Microphone: Ø 6x5mm
- Microphone sensitivity: -40dB +/- 3dB

210689 / DA-10227
Stereo Multimedia Headset

DIGITUS® Illuminated multimedia keyboard „Blueshine TX“

- Illuminated keyboard with dedicated Multimedia keys
- Letters light up in bright blue color
- Illumination controlled by a dedicated EL on/off switch
- Ultra-low profile keys for superior typing comfort
- Special Multimedia keys for “WWW”, “Email”, “Search”, “Favorites”
- Skid-proof rubber rim on both sides
- Ultra responsive keys for convenient working without stress
- Patented precision scissor-key technology–durable, slim and responsive
- USB Plug & Play installation-driverless
- 1,5m USB connection cable with USB A plug
- Dimensions: 398x163x26mm

224495 / DA-20200
Illuminated multimedia keyboard

DIGITUS® Multimedia keyboard

- Design keyboard with dedicated multimedia keys
- Ultra-low profile shape for superior typing comfort
- 7 dedicated hot keys for enhanced multimedia experience
- Ultra responsive keys for convenient working without stress
- Patented precision scissor-key technology–durable, slim and responsive
- USB Plug & Play installation
- 1,5m USB connection cable with USB A plug
- Dimensions: 459x162x27mm

224501 / DA-20210
Multimedia keyboard

DIGITUS® Multimedia keyboard

- Multimedia keyboard with 11 hot keys
- Volume and skip function buttons
- Built-in audio hub with speaker and microphone connectors
- Built-in 2-port USB hub
- USB type A connector, black

211297 / DA-20145
Multimedia keyboard

DIGITUS® Standard keyboard

- Standard keyboard
- USB type A connector, black

211280 / DA-20140
Standard keyboard

DIGITUS® 7-button laser mouse

- Wired laser gamer mouse
- 7-button scrolling wheel
- USB A type connector, black
- 1600dpi laser technology
- Rubber wheel with button switch function
- Rubber side parts for better grip
- 1.50m connecting wire

LASER HIGH PRECISION

211266 / DA-20123
7 button laser mouse

DIGITUS® 3-button laser mouse

- Wired laser mouse
- 3-button, scrolling wheel
- USB A type connector, black
- 1600dpi laser technology
- Rubber wheel with button switch function
- Rubber side parts for better grip
- 1.50m connecting wire

LASER HIGH PRECISION

211242 / DA-20121
3 button laser mouse

DIGITUS® Wireless notebook mouse

- 3-Button Mouse with scroll wheel
- Rubber coated ergonomical design
- Easy installation
- USB receiver is housed inside the mouse for ultimate portability
- Perfect for travel use-eliminates cumbersome wires
- 800dpi high resolution optical sensor
- Energy saving power management
- Uses 2x standard AAA batteries
- 1.2m Working distance mouse/receiver
- Supports Windows® Vista/XP/2000/ME/98 and Mac OS

222903 / DA-20124
Wireless notebook mouse

DIGITUS® 3-button laser mouse

- 3-Button laser mouse with scroll wheel
- Rubber coated ergonomical design
- Easy Plug & Play Installation
- 800dpi high resolution Laser engine
- USB port connection
- 1.2m connection cable
- Supports Windows® Vista/XP/2000/ME/98 and Mac OS

LASER HIGH PRECISION

222897 / DA-20125
3-button laser mouse

DIGITUS® Wireless 3-button mouse

- 3-Button Wireless Mouse with scroll wheel
- Rubber coated ergonomical design
- Easy installation
- 800dpi high resolution optical sensor
- Energy saving smart power management
- Mouse uses 2x rechargeable AAA batteries (included)
- Desktop cradle with receiver and charging function
- USB port connection
- 1.2m connection cable
- Charging by USB bus, no external power supply needed
- Status LED for low power/charging
- 1.2m Working distance mouse/receiver
- Supports Windows® Vista/XP/2000/ME/98 and Mac OS

222880 / DA-20126
Wireless 3-button mouse

DIGITUS® Optical 3-button wheel mouse USB, wired

- Optical 3-button mouse with scrolling wheel
- 800dpi high resolution
- Rubber coated wheel with button function
- Ergonomic design for right/left hand using
- USB A type connector
- 1.8m connection cable

240648 / DA-20116-1
DIGITUS® Optical 3-button wheel mouse USB, wired

DIGITUS® Optical 3-button wheel mouse USB+PS/2, wireless

- Standard optical mouse
- 3-button scrolling wheel
- PS2 interface, green by adapter
- USB A type connector, black
- 800dpi(dots per inch)
- Rubber wheel with button switch function
- Ergo design for right / left using

190011 / DA-20117
Optical 3-button wheel mouse USB+PS/2, wireless

DIGITUS® 3-button wheel mouse PS/2, wired

- Standard ball mouse
- 3-button scrolling wheel
- PS/2 Interface, green
- 520dpi
- Rubber wheel with button switch function
- Ergo design for right/left using
- 1.50m connection wire

220794 / DA-20115-1
3-button wheel mouse PS/2, wired

DIGITUS® Mouse pads, 3mm thick

- Colors: red, blue, green, grey and black
- Logo printing and additional colors upon request
- Dimensions: 250x220x3mm

073222 / DA-50101
Mouse pad, color red

073246 / DA-50102
Mouse pad, color blue

073253 / DA-50103
Mouse pad, color green

073260 / DA-50104
Mouse pad, color black

073277 / DA-50105
Grey

202967 / DA-50130
blue, 320x265 x3mm

202974 / DA-50131
black, 320x265 x3mm

DIGITUS® Keyboard wrist rest

- Ergonomically designed keyboard rest
- Gelfilled wrist rest for supporting the forearm while using the keyboard
- Available in red or blue
- Dimensions: 475x80x20mm

105015 / DA-50124
blue

105022 / DA-50125
red

DIGITUS® Mouse pads with wrist rest

- Ergonomically designed mouse pads
- Gel filled wrist rest for supporting the forearm
- Available in red or blue
- Dimensions: 225x180x30mm

104995 / DA-50122
blue

105008 / DA-50123
red

DIGITUS® „Twister“ notebook USB 2.0 hub

- 4 x USB A female, each twistable about 180 degree
- 1 x USB A male, integrated and twistable about 180 degree
- Space-saving design, direct pluggable to the notebook without additional cable
- High-quality „softtouch“ material
- With status LED and connector for an additional power supply
- USB 2.0 and USB 1.1 compatible
- Supports „Hot-Plug“ and „PnP“

221258 / DA-70213-1
„Twister“ notebook USB 2.0 hub

DIGITUS® USB 2.0 hub 4-port

- USB 2.0 and USB 1.1 compatible.
- 4 x USB A socket (USB 1.1 and 2.0 devices)
- Maximum data transfer rate 480Mbps (USB 2.0)
- Voltage protection at all outputs
- Supports „hot-plug“, is „PnP“ capable
- Compatible with PC and Apple computers (G3 and G4 series)
- Support for following OS: Windows® 98SE/2000/XP/Vista and Mac OS X.x and better
- Includes USB connector cable and power supply

211884 / DA-70224
USB 2.0 hub 4-port

211891 / DA-70227
USB 2.0 hub, 7-port

DIGITUS® USB 2.0 mini hub, 4-port

- 4 x USB 2.0 ports up to 100mA per port or up to 500mA (with power adapter)
- Support over current protection
- Support both high-speed (480Mbps), full-speed (12Mbps), and low-speed (1.5Mbps) transfer rate
- Truly Plug & Play automatic system configuration
- Chain up to 127 USB devices
- USB and ACPI compliant

233596 / DA-70132-2
USB 2.0 mini hub

DIGITUS® USB 2.0 mini hub, 4-port

- USB 2.0 and USB 1.1 compatible
- 4 x USB A, female (USB 1.1 and 2.0 devices)
- Maximum data transfer rate 480Mbps (USB 2.0)
- Over current protection on all outputs
- “Hot-plug” and “PnP” compatible
- Additional USB cable and external power supply included
- Operating system support for Windows® XP/Vista/MAC OS 10.x and higher

211846 / DA-70214
USB 2.0 mini hub, 4-port

DIGITUS® USB 2.0 hub, 4-port

- Compliant with USB specification 2.0
- 4-Port Hub (OHCI / EHCI)
- Compact pocket size
- All downstream facing ports can handle high-speed (480Mbps), full-speed (12Mbps),
- and low-speed (1.5Mbps) transmission
- Supports Plug & Play and Hot Swap
- Equipped with overcurrent detection and protection
- LED status indicators
- USB cable included
- Supported OS: Windows® 98/98SE/ME/2000/XP/Vista, MAC OS 8.6 and higher

211877 / DA-70215
USB 2.0 hub, 4-port

DIGITUS® USB 2.0 hub illuminated, 4-port

- Compliant with USB specification 2.0
- Root Hub with 4 downstream facing ports which are shared by OHCI and EHCI hostcontroller core
- All downstream facing ports can handle high-speed (480Mbps), full-speed (12Mbps),and low-speed (1.5Mbps) transmission
- Supports Plug & Play and Hot Swap
- Equipped with overcurrent detection and protection
- LED status indicators
- LED color: blue
- USB connection cable included
- Inclusiv external power supply for DA-70211

183068 / DA-70210
USB 2.0 hub illuminated, 4-port

183075 / DA-70211
USB 2.0 Hub 4-Port illuminated w/ psu

DIGITUS® Card reader USB 2.0 56in1+ 3-port hub

- Compliant to USB 2.0 specification
- Plug & Play automatic system configuration
- Integrated 3-Port USB Hub
- Supports high-speed (480Mbps), full-speed (12Mbps) and low-speed (1,5Mbps) transfer rate
- Buspowered mode and supports up to 500mA / Port (with additional power adapter)
- Connection type: 3 x USB type A female, 1 x Mini USB type female connector
- Supports following memory card formats: Compact Flash (CF) series, Memory Stick (MS) + M2 series, XD series, Secure Digital (SD / SDHC) + mini SD + Micro SD (Trans-Flash)
- USB connection cable & Driver CD-ROM Included
- Supported OS: Windows® 98SE/2000/XP/VISTA and Mac OS 10.X

221777 / DA-70312
Card reader USB 2.0 56in1 + 3-port hub

DIGITUS® Card reader USB 2.0 56in1

- Compliant to USB 2.0 specification
- Supports USB High Speed 480Mbps and Full Speed 12Mbps
- Supports Media Copy and Hot-Swap
- Supports Hot-Plug, PnP
- Supports following memory cards: Compact Flash (CF) series, Memory Stick (MS) series,Smart Media (SM) series, Secure Digital (SD / SDHC) series, Micro SD (T-Flash) series
- Bus powered
- USB connection cable incl.
- Supported OS: Windows® 98SE/M/2000/XP/Vista, Mac OS 10.x

220619 / DA-70316-1
Card reader USB 2.0 56in1, incl. Micro SD (T-Flash)

DIGITUS® USB 2.0 multi card reader

- Supports MS, MS Pro, MS Duo, MS Pro Duo, HS MS, SD, mini SD, MMC, RS-MMC, Micro SD (Trans-Flash)
- Compliant with USB 2.0
- Complies with USB Storage Class specification Rev. 1.0
- Operating System Supported: Windows® 98SE/ME/2000/XP/Vista, Mac 9.x/X, Linux

205746 / DA-70310
USB 2.0 multi card reader

DIGITUS® SIM card reader

- SIM phone book back up, restore and editing
- incl.English, German, French, Italian Software
- SMS data management
- Outlook / Lotus Notes synchronized
- Compatible with all SIM's from any manufacturers operators (native, Java, etc.)
- Compliant with GSM 11.11 standards
- Supported OS: Windows® 98SE/ME/2000/XP/Vista, Internet Explorer v. 5.5 or later

196662 / DA-70320
SIM card reader

DIGITUS® Card reader USB 2.0 54in1, ext./int.

- Compliant to USB 2.0 specification
- Internal/external use 3.5"
- Supports Media Copy and Hot-Swap
- Supports Hot-Plug, PnP
- Supports following memory cards: Compact Flach (CF) series, Memory Stick (MS) series,Smart Media (SM) + XD series, Secure Digital (SD) series
- USB connection cable integrated
- Supported OS: Windows® XP/Vista, Mac OS 10.x

233572 / DA-70335
Card reader USB 2.0 54in1, ext./int. grey

233589 / DA-70335B
Card reader USB 2.0 54in1, ext./int. black

DIGITUS® Cardbus CompactFlash card reader

- Fulfils the 16bit PCMCIA specification
- 32bit PC card compatible
- For Compact Flash Type I

126270 / DC PCMCIA-CR-CF
Cardbus CF card reader

DIGITUS® Multimedia panel USB 2.0 53in1

- USB 2.0 (USB 1.1 compatible)
- 5.25" installation size
- Supports following media: Compact Flash (CF) series, Memory Stick (MS) series, Smart Media (SM) + XD series, Secure Digital (SD) series
- Connectors:1x USB2.02x eSATA1x „Firewire" IEEE 1394a Connector1x Earphone jack1x Microphon jack1x TV out
- All necessary cable included
- Black with an additional silver and beige sticker
- Operating System: Windows® 98SE/2000/XP/Vista

233978 / DA-70138-2
Multimedia panel USB 2.0 53in1

DIGITUS® Multi function panel 3.5"

- 3.5" installation size
- 2 x USB 2.0 / USB 1.1 ports
- IEEE 1394 ports: 1 x IEEE 1394 female 6-pin
- 1 x audio line in, line out
- USB, Firewire and audio connector cables included
- System requirements: Min. Windows® 98SE, Windows® 2000, Windows® XP, VistaComputer with installed 2 x USB 2.0 / USB 1.1 1x "Firewire" and audio interfaces

215394 / DA-70122-A
Multi function panel 3.5"

DIGITUS® USB 2.0 hub, 3.5" drive bay installation

- USB 2.0 and USB 1.1 compatible
- 4 x USB A, female (USB 1.1 and 2.0 devices)
- Maximum data transfer rate 480Mbps (USB 2.0)
- Over current protection on all outputs
- "Hot-plug" and "PnP" compatible
- Power supply via PC power supply
- Additional USB cable included
- Operating system support for Windows® 98/SE/ME/2000/XP and MAC OS 10.x and higher

233930 / DA-70133-2
USB 2.0 hub, 3.5", 4-port

DIGITUS® Serial ATA HDD removable frame, grey and black

- Hard drive removable frame for installation in 5.25" PC drive bays
- For 3.5" Serial ATA hard drives
- Material: plastic
- Lockable drawer
- With status LED
- 1 additional fan integrated

194163 / DA-50214-A
SATA HDD removable frame, grey

105022 / DA-50125
SATA HDD removable frame, black

DIGITUS® IDE HDD removable frame, grey and black

- High quality 5.25" hard drive removable frame for 3.5" IDE hard drives
- Material: plastic
- Frames are equipped with an additional fan (one further fan for the drawer can also be fitted
- Lockable drawer
- With status LED

194149 / DA-50211-A
IDE HDD removable frame, grey

236429 / DA-50218
IDE HDD removable frame, black

DIGITUS® Premium SATA HDD removable frame, grey and black

- High quality 5.25" hard drive removable frame for 3.5" S-ATA hard drives
- Aluminium with plastic panel, better EMI / RFI protection
- Integrated bottom fan
- Lockable drawer
- With status LED

236405 / DA-50216
Premium SATA HDD removable frame metal, grey

236412 / DA-50217
Premium SATA HDD removable frame metal, black

DIGITUS® USB 2.0 - PCI card

- USB 2.0/USB 1.1 compatible
- Maximum data transfer rate 480Mbps
- Surge protection on all outputs
- Supports Hot-Plug and Plug & Play
- Compatible with PC and Apple computers (G3 and G4 series)
- The following operating systems are supported: Windows® XP/Vista, MAC OS 10.x or higher

119654 / DC USB2-2
USB 2.0 - PCI card, 2-ports, NEC chipset

DIGITUS® USB 2.0 - PCI card



- USB 2.0/USB 1.1 compatible
- Maximum data transfer rate 480Mbps
- Surge protection on all outputs
- Supports Hot-Plug and Plug & Play
- OS supported: Windows® XP/Vista, MAC OS 10.x or higher

134282 / DC USB2-4
USB 2.0 - PCI card, 4-ports external, VIA chipset

DIGITUS® USB 2.0 - PCI card

- USB 2.0 and USB 1.1 compatible
- 4 external and 1 internal USB Port
- VIA chipset
- Maximum data transfer rate 480Mbps
- Supports "Hot Plugging", is "PnP" capable
- Operating System: Windows® 98SE/ME/2000/XP/VISTA

202844 / DC USB2-4-W
USB 2.0 - PCI card, 4-port, VIA chipset

DIGITUS® USB 2.0 - PCI card

- USB 2.0/USB 1.1 compatible
- 4 external and 1 internal USB port
- Maximum data transfer rate 480Mbps
- Surge protection on all outputs
- Supports Hot-Plug and Plug & Play
- Compatible with PC and Apple computers (G3 and G4 series)
- OS supported: Windows® XP/Vista, MAC OS 10.x or higher

102342 / DC USB2-5
USB 2.0 - PCI card, 4+1 ports, NEC chipset

DIGITUS® Firewire A - PCI Cards

- Adds three IEEE1394a (FireWire) ports to your PC for high-speed I/O connectivity
- One (1) internal IEEE1394a port (Sharing with first external IEEE1394 port)
- Supports data transfer rates of 100, 200 and 400Mbps
- PCI 32bit 33MHz Interface, VIA VT6307 chipset
- ULEAD Video Studio software for film data munging (only DS-33202)
- OS Supports: Windows® 2000 and XP. Windows® Vista 32bit and Windows® Vista 64bit
- Package contents: 1x User Manual, 1x LowProfile bracket, (only DS-33202: 1x U/Lead CD, 1X IEEE 1394a cable)

252733 / DS-33201
Firewire PCI card, 2+1 ports

252740 / DS-33202
Firewire PCI card, 2+1 ports, incl. ULEAD software

DIGITUS® Firewire A - PCI Cards

- Adds four IEEE1394a (FireWire) ports to your PC for high-speed I/O connectivity
- One (1) internal IEEE1394a port (Sharing with first external IEEE1394 port)
- Supports data transfer rates of 100, 200 and 400Mbps
- PCI 32bit 33MHz Interface,. VIA VT6306 chipset
- ULEAD Video Studio software for film data munging (only DS-33204)
- OS Supports: Windows® 2000 and XP.Windows® Vista 32bit and Windows® Vista 64bit
- Package contents: 1x User Manual, 1x LowProfile bracket, (only DS-33204: 1x U/Lead CD, 1X IEEE 1394a cable)

252757 / DS-33203
Firewire PCI card, 3+1 ports

252764 / DS-33204
Firewire PCI card, 3+1 ports, incl. ULEAD software

DIGITUS® Firewire 800 PCI card

- IEEE1394a and IEEE1394b compatible
- Compatible with 32/64bit PCI
- 3x Firewire 800 ports (9-pin)
- Additional power supply connection on the card
- Supports most devices such as camcorders, digital cameras, CD-RW/DVD-ROM, hard drives

171010 / DCST 1394B-3
Firewire 800 PCI card, 3x external

DIGITUS® USB 2.0 / Firewire combo PCI card

- USB 2.0 certified, USB 1.1 compatible
- IEEE1394a compatible
- Data transfer rates up to 400Mbps (IEEE) or 480Mbps (USB)
- USB 2.0 ports 3x external / 1x internal
- IEEE1394a ports 2x external / 1x internal

176954 / DCST USB2/4-1394/3V
USB 2.0 / Firewire combo PCI card

DIGITUS® serial interface card, PCI

- Chipset multi UART 16C550 with 4 independent channels
- Output 1, 2, 4 x DSUB 9
- IRQ selection takes place automatically via „PnP"
- Operating system support for DOS, Linux, Windows® 98/ME/2000/XP/2003/Vista

102236 / DC SER1
Serial interface card, 1 x DSUB 9

102243 / DC SER2
Serial interface card, 2 x DSUB 9

102250 / DC SER4
Serial interface card, 4 x DSUB 9

DIGITUS® parallel interface card, PCI

- Output 1 x or 2 x DSUB 25 female on slot bracket
- Supports the following printer modes: SPP, EPP and ECP
- IRQ selection takes place automatically via „PnP"
- Operating system support for DOS, Windows® 98/ME/2000/2003/XP32/64/Vista32

102212 / DC PAR1
Parallel interface card 1 x DSUB 25

102229 / DC PAR2
Parallel interface card 2 x DSUB 25

DIGITUS® 2ser. / 1par. PCI Interface Card

- Multi-I/O PCI Card
- 2 x DB9 serial Ports / 1 x DB25 parallel Port
- Easy Plug and Play installation
- Supported parallel port modes: SPP, EPP, ECP
- Parallel port data transfer up to 1,5Mbps
- Supports 2 x 16550 Fast UART serial ports
- Serial port data transfer up to 115,2Kbps
- PCI 2.1 compatible
- Automatically selects IRQ & I/O address
- Supports Windows® 2000/XP/Server 2003/Vista

223566 / DC PAR1SER2-1
2ser. / 1par. PCI Interface Card

DIGITUS® Ultra ATA 133 RAID Controller, PCI card

- 2 x Ultra ATA 133 IDE connectors for up to four IDE/ATA devices
- Compatible with ATA/ATAPI-6 specifications
- Supports the Scatter/Gather function for the DMA/UDMA function
- Supports Max. PCI bus master data transfer rate of 66MB/Sec.
- Fully backward compatible with Ultra ATA/133, EIDE/Fast ATA-2 IDE & ATAPI devices
- PCI bus 32bit
- Silicon Image 0680 chipset
- Supports RAID 0, 1, 0+1 and JBOD function
- OS Supports: Windows® 98SE/ME/NT4.0/2000/XP/Vista 32/64bit.
- Package contents: 1x IDE cable, 1x driver CD, 1x low profile bracket, 1x user manual

252702 / DS-33104
IDE ATA133 Raid Controller, PCI 32bit

DIGITUS® SATA 150 RAID 2-port, PCI card

- Conform to Serial ATA 1.0 specification, revision 2.3
- Supports RAID for speed and data protection respectively
- Stand-alone PCI to serial ATA host controller
- Supports hard drives larger than 137GB
- Conform to SATA revision 1.0
- 2 x serial ATA connectors
- Two independent serial ATA channels to support up to two Serial ATA drives
- Serial ATA generation 1 data transfer rate up to 150MB/sec
- Operating system support for Win2K/XP/Vista

244998 / DS-33101
SATA PCI Controller, 2-port

DIGITUS® SATA 150 RAID 4-port, PCI card

- Compliant to Serial ATA 1.0
- 4 internal SATA connectors, 2 external eSATA connectors (selectable)
- Stand-alone PCI to serial ATA host controller
- Supports hard drives larger than 137GB
- Conforms to PCI IDE Controller specification, Rev. 2.3, 32bit, 33/66Mhz
- Four independent serial ATA channels for simultaneous connection of one serial ATA device each
- Supports the following Raid Levels: 0 = Disk Striping, 1 = Disk Mirroring, 5= Parity Raid, 1+0 = Combination of disk striping and disk mirroring
- Serial ATA generation 1 data transfer rate up to 150MB/sec
- Supports for XP/2003 32/64bit/Vista 32/64bit

244981 / DS-33102
SATA 150 PCI card, 4-port RAID

DIGITUS® Cardbus to PCI adapter card

- Compliant with PCI local bus specification 2.3
- Compliant with PC card standard release 8.1 specification
- Works with various types of 16 or 32bit CardBus PC Cards
- Advanced Configuration and Power Interface (ACPI) Specification 2.0 Compliant
- Bridge function between PCI bus and CardBus
- Supports PC Card or CardBus with Hot Insertion and Removal
- Support Windows® 2000/XP/Server 2003/Vista

244783 / DS-33103
Cardbus to PCI adapter card

DIGITUS® SATA to IDE adapter

Allows to use all kind of IDE storage devices with 40pol IDC connector with a serial ATA controller

- „Stand alone" Serial ATA to Ultra ATA bridge board Design
- Conform to Serial ATA 1.0 Specifications, Revision 2.2
- Supports PIO mode 0-4
- Ultra ATA 133 / 100 / 66 / 33 support
- Supports all types of ATATPI, ATA/133, ATA/100, ATA/66, ATA/33, EIDE and IDE storage devices (DVD, DVD-RAM, MO, CD-ROM, CD-RW, Hard Disk
- Compact dimensions for direct connection to ATA hard drives
- Boarddesign: horizontal version

244967 / DS-33150
SATA to IDE adapter

DIGITUS® IDE to SATA adapter

Allows to use all kind of SATA storage devices with an IDE controller.

- „Stand alone" Ultra ATA to Serial ATA bridge board Design
- Conform to Serial ATA 1.0 Specifications, Revision 2.2
- Transferrate: 1.5Gb/s
- Supports all types of SATA storage devices (DVD, DVD-RAM, MO, CD-ROM, CD-RW, Hard Disk, …)
- Compact dimensions for direct connection to ATA hard drives
- Boarddesign: horizontal version

244974 / DS-33151
IDE to SATA Adapter

DIGITUS® USB 2.0 4-port PCI Express card

- 4 x external and 1 x internal USB 2.0 Ports
- Supports high-speed (480Mbps), full-speed (12Mbps), and low-speed(1.5Mbps) data transfer modes for simultaneous operation of multiple USB 2.0/1.1 devices
- Support device hotswapping and Plug'n Play
- Installs in any available PCI Express slot with different lane width
- Supports: Windows® 2000/XP/2003 32/64bit/Vista 32/64bit

244936 / DS-30202
USB 2.0 4-port PCI Express card

DIGITUS® Firewire PCI Express card

- 2 x external and 1 x internal IEEE1394 6-pin ports
- Data transfer rate 100 / 200 / 400Mbps
- Support device hotswapping and Plug'n Play
- Compliant with IEEE 1394 and OHCI 1.1 standards and specification
- Installs in any available PCI Express slot with different lane width
- Incl. software „Ulead Videostudio"
- Supports Windows® 2000/XP/Server 2003/Vista

244912 / DS-30201-1
Firewire PCI Express card

DIGITUS® Multi I/O - PCI Express card

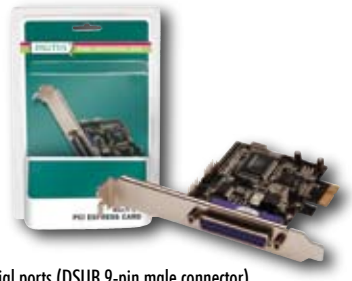

- 2 x serial ports (DSUB 9-pin male connector)
- 1 x parallel port (DSUB 25-pin female connector)
- Supports 2 x serial fast 16550 FIFO UART
- Serial data transfer rate up to 230.400bps
- Supports SPP, EPP and ECP parallel port
- Parallel data transfer rate up to 1,5Mbps
- Compliant with PCI Express base specification 1.0a
- Supports Windows® 2000/XP/Server 2003/Vista

244844 / DS-30501-1
Multi I/O - PCI Express card

DIGITUS® SATA II PCI Express card, 1-port

- 1 x external eSATA and 1 x internal SATA Port
- int. / ext. Ports selectable by configuration
- Compliant with PCI Express Base Specification 1.0a
- Compliant with Serial ATA 1.0a specification and with full complement of Serial ATA II optional features
- Installs in any available PCI Express slot with different lane width
- Supports data transfer up to 300Mbps
- Supports NCQ (Native Command Queuing)
- Hot-Plug and Hot-swapping feature
- Supports Windows® 2000/XP/Server 2003/Vista

244813 / DS-30101
SATA II PCI Express card, 1-port

DIGITUS® SATA II PCI Express card, 2-port

- 2 x external eSATA and 2 x internal SATA Ports
- int. / ext. ports selectable by configuration
- Compliant with PCI Express Base Specification 1.0a
- Compliant with Serial ATA 1.0a specification and with full complement of Serial ATA II optional features
- Installs in any available PCI Express slot with different lane width
- Supports RAID level 0,1 0+1
- Supports data transfer up to 300Mbps
- Supports NCQ (Native Command Queuing)
- Hot-Plug and Hot-swapping feature
- Supports Windows® 2000/XP/Server 2003/Vista

245056 / DS-30102
SATA II PCI Express card, 2-port

DIGITUS® SATA II PCI Express card, 4-port

- Compliant to Serial ATA II specification up to 300MB/Sec
- Supports SATA II Native Command Queuing (NCQ)
- 4 internal SATA connectors, 2 external eSATA connectors (selectable)
- Stand-alone PCI Express to serial ATA host controller
- Bus specification: PCI-Express x 4
- Four independent serial ATA channels for simultaneous connection of one serial ATA device each
- Support for XP/2003 32/64bit/Vista 32/64bit

245049 / DS-30104
SATA II PCI Express card, 4-port

DIGITUS® SATA II / PATA PCI Express combo card

- 2 x external eSATA and 2 x internal SATA Ports
- 1 x internal parallel ATA port - supports up to UDMA-6 transfer mode and up to 4 devices
- int. / ext. ports selectable by configuration
- Compliant with PCI Express Base Specification 1.0a
- Compliant with Serial ATA 1.0a specification and with full complement of Serial ATA II optional features
- Supports data transfer up to 300Mbps
- Supports RAID level 0,1 0+1
- Installs in any available PCI Express slot with different lane width
- Supports NCQ (Native Command Queuing)
- Hot-Plug and Hot-swapping feature on SATA ports
- Supports Windows® 2000/XP/ Server 2003 / Vista

244950 / DS-30103
SATA II / PATA PCI Express combo card

DIGITUS® „ExpressCard" to „PCI Express" adapter card

- Shares "ExpressCard" notebook extensions with the PC
- Supports ExpressCard 34 and 54 form factor size
- Compliant with PCI Express Base Specification 1.0a
- 1,5V / 3,3V LED indicator
- Installs in any available PCI Express slot with different lane width
- No additional driver software required

245155 / DS-30401
„ExpressCard" to „PCI Express" adapter card

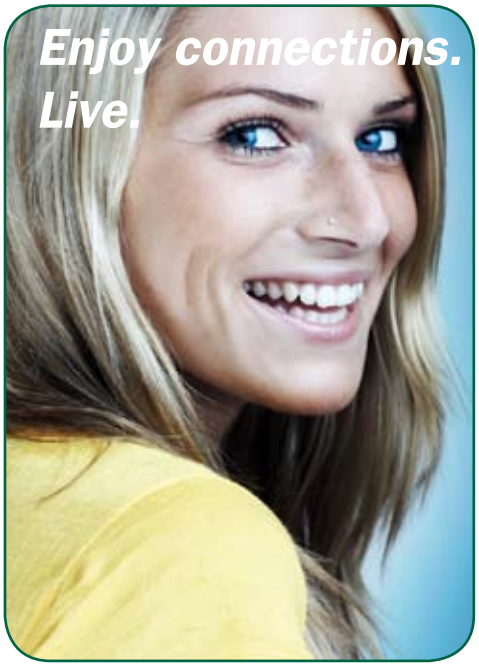

DIGITUS® USB 2.0 ExpressCard

- 4 x USB 2.0 Typ A Ports
- ExpressCard/34 form factor
- Data transfer rate up to 480Mbps
- Support device hotswapping and Plug & Play
- Compliant with EHCI and OHCI standards and specification
- 1 x DC power jack (5V /2A)
- Supports Windows® 2000/XP/Server 2003/Vista

244943 / DS-31203
DIGITUS® USB 2.0 ExpressCard 4-ports

DIGITUS® Firewire ExpressCard

- 2 x IEEE1394 6-pin Ports
- ExpressCard/34 form factor
- Data transferrate 100/200/400Mbps
- Support device hotswapping and Plug'n Play
- Compliant with IEEE 1394, OHCI 1.1 and ExpressCard 1.0 standards and specification
- 1 x DC power jack (12V /1A)
- Incl. „Ulead Videostudio" Software
- Supports Windows® 2000/XP/Server 2003/Vista

244929 / DS-31201-1
Firewire ExpressCard

DIGITUS® combo USB 2.0 / Firewire Express Card

- 2 x IEEE1394 6-pin Ports, 1 x USB 2.0 Typ A jack
- ExpressCard/34 form factor
- Data transfer rate: IEEE 1394 100/200/400Mbps, USB 2.0 up to 480Mbps
- Support device hotswapping and Plug & Play
- Compliant with IEEE 1394, OHCI 1.1 and ExpressCard 1.0 standards and specification
- 1 x DC power jack (12V /1A)
- Incl. software „Ulead Videostudio"
- Supports Windows® 2000/ XP/Server 2003 SP1/Vista

244899 / DS-31202
USB 2.0 / Firewire combo ExpressCard

DIGITUS® RS 232 ExpressCard

- 1 x DB9 / RS 232 Ports
- ExpressCard/34 form factor
- Data transfer rate up to 230.400bps
- Support device hotswapping and Plug & Play
- Bus Powered – no separate power supply or battery required
- Works with various types of RS232 serial devices including modems, PDAs, label printers, bar code scanners, digital cameras, and more
- Supports Windows® 2000/XP/Server 2003/Vista

244875 / DS-31204
RS 232 ExpressCard 1-port

244882 / DS-31205
RS 232 ExpressCard 2-ports

DIGITUS® Parallel port ExpressCard

- 1 x DSub 25 female
- ExpressCard/34 form factor
- Support device hotswapping and Plug & Play
- Bus Powered – no separate power supply or battery required
- Works with various Printer types with parallel Interface
- Supports Windows® 2000/XP/Server 2003/Vista

244868 / DS-31206
Parallel port ExpressCard

DIGITUS® Serial, parallel combo ExpressCard

- 1 x DB9 / RS 232 port
- 1 x DSub 25 parallel port
- ExpressCard/34 form factor
- Support device hotswapping and Plug & Play
- Bus Powered – no separate power supply or battery required
- Works with various types of parallel and RS232 serial devices including modems, PDAs, printers, bar code scanners, digital cameras, and more
- Supports Windows® 2000/XP/Server 2003/Vista

244851 / DS-31207
Serial, parallel combo ExpressCard

DIGITUS® eSATA II 300 ExpressCard

- 1 x eSATA port
- ExpressCard/34 form factor
- Data transfer rate up to 3Gbps
- Support device hotswapping
- Compliant with ExpressCard 1.0 specification
- Supports Native Command Queuing (NCQ)
- Supports Windows® 2000/XP/Server 2003/Vista

245032 / DS-31101
eSATA II 300 ExpressCard

DIGITUS® eSATA II 300 ExpressCard

- 2 x eSATA ports
- ExpressCard/34 form factor
- Data transfer rate up to 3Gbps
- Support device hotswapping
- Compliant with ExpressCard 1.0 specification
- Supports Native Command Queuing (NCQ)
- Supports Windows® 2000/XP/Server 2003/Vista

245018 / DS-31102
eSATA II 300 ExpressCard, 2-ports

DIGITUS® Firewire 800 cardbus

- USB 2.0 compatible
- 32Bit PC card compatible
- 2 x USB A female
- Connection for external power supply
- Maximum data transfer rate 480Mbps (USB 2.0)
- Voltage protection on all outputs
- Supports "Hot Plugging", is "PnP" compatible
- Power supply unit included

121305 / DC USB2-PCMCIA
USB 2.0 cardbus adapter, 2 ports

DIGITUS® USB 2.0 cardbus

- 3 x Firewire 6-pin ports
- IEEE 1394 / 1394a compatible
- Maximum data transfer rate 400Mbps
- Supports "Hot Plugging", is "PnP" compatible
- Connection for external power supply
- Inclusiv Firewire 6 to 4 Pin cable
- Support Windows® 98SE/ME/XP SP1/2000/Vista

158561 / DCST 1394-PCMCIA
Firewire cardbus

DIGITUS® Firewire cardbus

- IEEE 1394b / 1394a compatible
- 32bit PC card compatible
- 1 x IEEE 1394b 9-pin connector, 1 x IEEE 1394a 6-pin connector, 1 x IEEE 1394a 4-pin connector
- Maximum data transfer rate up to 800Mbps
- Voltage protection on all outlets
- Supports hot plug, is „PnP" capable
- Power supply included
- Support Windows® XP SP1/ 2000 SP4

167273 / DCST PCMCIA-1394B
Firewire 800 cardbus

DIGITUS® Serial ATA 150 Cardbus, 2 Connections

- Conforms to Serial ATA 1.0 specification, revision 2.2
- 32bit PC Card, card bus Type II compatible
- Stand alone PCI to Serial ATA host Controller
- Supports hard drives larger than 137GB
- Two independent serial ATA channels, for simultaneous connection of one serial ATA device each
- Serial ATA generation 1 data transfer rate up to 150MB/sec
- Operating system support for Windows® 98SE/ME/NT4/2000/XP/ Vista

245001 / DS-32101-1
Serial ATA 150 PC-Card, 2 Connections

DIGITUS® 2.5“ external HDD enclosure, IDE to USB 2.0

- External enclosure for 2.5“ IDE hard disc drives
- Conforms to USB 2.0 specification
- Data transfer rate up to 480Mbps
- Conforms to ATA/ATAPI-6 specification Rev.1.0
- Conforms to USB storage class specification Ver.1.0
- Compatible with Win98SE, ME, 2000, XP and Vista
- Supports Mac OS 9.X, 10.X LINUX 2.4.x and better
- LED power (blue)/ status (red)
- Power supply via USB port

222699 / DA-70550
2.5“ external HDD enclosure IDE to USB 2.0

DIGITUS® 2.5“ external HDD enclosure, SATA to USB 2.0

- For standard 2.5“ SATA / SATA II HDD‘s
- Complies with USB specification rev. 2.0
- High speed USB transfer rate up to 480Mbps
- Complies with USB Storage Class specification ver.1.0
- LED Power (blue) / Status (red)
- Compatible with Windows® 98SE/ME/2000/ XP/Vista, Mac OS 9.2, 10.x or later

222705 / DA-70555
2.5“ external HDD enclosure SATA to USB 2.0

DIGITUS® 2.5“ external HDD enclosure, SATA to eSATA / USB 2.0

- For standard SATA / SATA II HDD‘s
- Complies with USB specification rev. 2.0 and SATA 1.0
- High speed USB transfer rate up to 480Mbps
- Automation 3.0 / 1.5Gbps transmission rate negotiation with SATA HDD
- 1x USB mini 5-pin connector, 1x eSATA connector
- Complies with USB Storage Class specification ver.1.0
- LED Power (blue)/ Status (red)
- Compatible with Windows®98SE/ME/2000/XP/Vista

222712 / DA-70560
2.5“ external HDD enclosure SATA to eSATA / USB 2.0

DIGITUS® 2,5“ HDD enclosure with biometric fingerprint reader

- Aluminum 2.5“ HDD enclosure, dust & impact resistant design
- Integrated high speed, high resolution and reliable fingerprint sensor
- Ultra ATA (Ultra DMA) 33/66/100 Compliant 2.5” Hard Disk Drive supported
- USB bus powered
- Supports HDD capacity up to 160GB
- USB 2.0 Highspeed up to 480Mbps
- Compliant to „USB mass storage class device driver“ specification
- Windows® VISTA/XP/2000 supported, no driver needed
- Fingerprint authentication and file encryption by software
- Encryption/decryption using safe AES 256bit algorithm
- Features unencrypted public Disk & encrypted Security Disk on one HDD
- Supports up to 10 fingerprint enrollments for different users
- Delivered encryption software for Windows® VISTA/XP/2000
- Compact size: 124x76x17mm

222378 / DA-70702
2.5“ HDD enclosure with biometric fingerprint reader

DIGITUS® 3.5“ external HDD enclosure, IDE to USB 2.0

- External enclosure for 3.5“ IDE hard disc drives
- Conforms to USB 2.0 specification
- Data transfer rate up to 480Mbps
- Conforms to ATA/ATAPI-6 specification Rev.1.0
- Conforms to USB storage class specification Ver.1.0
- Compatible with Windows® 98SE/ME/2000/XP/Vista
- Supports Mac OS 9.X, 10.X LINUX 2.4.x and better
- LED power (blue)/ status (red)

222729 / DA-70570
3.5“ external HDD enclosure IDE to USB 2.0

DIGITUS® 3.5“ external HDD enclosure, SATA to USB 2.0

- For standard 3.5“ SATA / SATA II HDD’s
- Complies with USB specification rev. 2.0
- High speed USB transfer rate up to 480Mbps
- Complies with USB Storage Class specification ver.1.0
- LED Power (blue) / Status (red)
- Compatible with Windows® 98SE/ME/2000/XP/ Vista, Mac OS 9.2, 10.x or later

222736 / DA-70575
3.5“ external HDD enclosure SATA to USB 2.0

DIGITUS® 3.5“ external HDD enclosure, SATA to eSATA / USB 2.0

- For standard SATA / SATA II HDD’s
- Complies with USB specification rev. 2.0 and SATA 1.0
- High speed USB transfer rate up to 480Mbps
- Automation 3.0 / 1.5Gbps transmission rate negotiation with SATA HDD
- 1x USB mini 5-pin connector, 1x eSATA connector
- Complies with USB Storage Class specification ver.1.0
- LED Power (blue)/ Status (red)
- Compatible with Windows® 98SE/ME/2000/XP/Vista

222743 / DA-70580
3.5“ external HDD enclosure SATA to eSATA / USB 2.0

DIGITUS® 3.5“ external HDD enclosure, IDE or SATA to eSATA / USB 2.0

- For standard IDE, SATA, SATA II HDD’s
- Conforms to ATA/ATAPI-6 specification Rev.1.0
- Complies with USB specification rev. 2.0 and SATA 1.0
- High speed USB transfer rate up to 480Mbps
- Automation 3.0 / 1.5Gbps transmission rate negotiation with SATA HDD
- 1x USB mini 5-pin connector, 1x eSATA connector
- Complies with USB Storage Class specification ver.1.0
- LED Power (blue)/ Status (red)
- Compatible with Windows® 98SE/ME/2000/XP/Vista

222750 / DA-70585
3.5“ external HDD enclosure IDE or SATA to eSATA / USB 2.0

DIGITUS® External USB 2.0 4x HDD box

External 4x HDD Box with JBOD (Just A Bunch Of Disk) mode: Combining multiple physical disk drives into a single virtual one. 2 to 4 disks can be merely concatenated, end to beginning, so they appear to be a single large disk. Used to turn several odd-sized drives into one useful drive. For example JBOD could use a 300GB, 500GB, 400GB and 200GB drive to combine into a logical drive at 1.4TB (max. up to 2TB), which is often more useful than the individual drives separately.

- Compliant to USB 2.0 specification, type B connector
- IDE interface, LBA compatible HDD (>1024 cyl.)
- Supports 3.5" and 2.5" HDD (2.5" with optional adapter)
- Power ON/OFF switch
- Cooling Fan ON/OFF switch with LED
- JBOD mode with LED indication
- Supported OS: Win 98SE/ ME/ 2000 SP-3/ XP > SP-1, Mac OS 10.3.9/ 10.4
- Dimensions: 135x172x248mm
- Weight: 2.4kg
- Power supply: Input 100V-240V AC, Output +5V 4.0A/ +12V 6.0A (max.)
- Temperature: 5-35° C
- Humidity: 20-80%

192411 / DA-70530
External USB 2.0 4x HDD box - IDE interface

DIGITUS® External 2 bay HDD enclosure, SATA to eSATA

- For 2 standard 3.5" SATA / SATA II hard disk (up to 1 TB each)
- Aluminium housing with integrated cooling fan
- Data transfer rate: USB 2.0 480MB/s, SATA II 3Gb/s
- Big mode & port multiplair: switching & tact switch
- Power Indicator, red
- HDD access LED indicator, blue
- HDD IN LED indicator, green
- USB Interface LED indicator, blue
- eSATA Interface LED indicator, blue
- Incl. eSATA connection cable, USB connection cable and power supply
- Dimension (W x H x D): 125x200x89mm
- Weight: 1.015kg
- Supports Windows® 2000/XP/Vista

233909 / DA-70525
External 2 bay HDD enclosure

DIGITUS® External IDE to LAN + USB enclosure

- External enclosure for 3.5" hard disk drives with RJ45 network and USB 2.0 connectors
- NAS function (Network Attached Storage) to provide centralized data access and storage to the network
- Easy provides storage space for expansion, sharing and backup to the whole network
- Ideal, cost-efficient and mobile „stand alone" solution for office or home users
- RJ45 network connector for Fast Ethernet 10/100Mbps
- High speed USB 2.0 port to serve as an external HDD connected to a computer, up to 480Mbps data transfer rate
- Internal Ultra ATA 133 IDE Interface
- Easy installation an administration by web interface - no additional driver software needed
- Provides FTP file server platform support
- Supported protocols: TCP/IP (Net BIOS Name Server), Microsoft Networks (CIFS/SMB), HTTP1.0 and HTML2.0, DHCP Server / Client (auto detection), SNTP Client und Telnet Server
- LED indicators for operation, connection, data transfer
- Hot pluggable, hot swappable and Plug-n-Play capable
- Housing material aluminium, plastic
- Supported OS: Windows® 98SE/2000/ME/XP/Vista and MAC OS X

222347 / DA-70516
External IDE to LAN + USB enclosure

DIGITUS® External SATA to LAN + USB enclosure

- For standard 3.5" SATA / SATA II HDD's
- Aluminium enclosure with integrated cooling fan
- Data transfer rates: 10 / 100Mbit Fast Ethernet, up to 480Mbps USB
- External enclosure for 3.5" hard disk drives with RJ45 network and USB 2.0 connectors
- NAS function (Network Attached Storage) to provide centralized data access and storage to the network
- Easy provides storage space for expansion, sharing and backup to the whole network
- Ideal, cost-efficient and mobile „stand alone" solution for office or home users
- RJ45 network connector for Fast Ethernet 10/100Mbps
- Easy installation an administration by web interface - no additional driver software needed
- Provides FTP file server platform support
- Supported protocols: TCP/IP (Net BIOS Name Server), Microsoft Networks (CIFS/SMB), HTTP1.0 and HTML2.0, DHCP Server / Client (auto detection), SNTP Client und Telnet Server
- LED indicators for operation, connection, data transfer
- Hot pluggable, hot swappable and Plug-n-Play capable
- Housing material aluminium, plastic
- Supported OS: Windows® 98SE/2000/ME/XP/Vista and MAC OS X

233565 / DA-70520
External SATA to LAN + USB enclosure

DIGITUS® External SATA HDD docking station

- Supports standard 2.5" and 3.5" SATA HDD's
- Data transfer rate: up to 480Mbps USB 2.0
- Simple and easy to install and use HDD's
- Patented design for mounting and departing HDD's
- Power (red) and access (blue)LED indicator
- Incl. USB 2.0 A/M cable, manual and power supply
- Dimension (WxDxH): 130x90x68mm
- Supported Operating Systems: Windows® 98SE/2000/XP/Vista, Mac OS 10.2 and higher

245643 / DA-70540-1
External SATA HDD docking station

DIGITUS® USB 2.0 IDE & SATA cable

- Supports 2.5"/3.5" IDE and SATA HDD's, 1.8" HDD's only with suitable adapter
- Supports SATA, SATA II
- Compliance with USB 2.0 (Hi-Speed)
- Compliance with USB Mass Storage Class
- Supports 480Mbps High Speed (HS) and 12Mbps Full Speed USB operation
- Supports ATA/ATAPI Ultra DMA Mode
- Supports ATA/ATAPI PACKET command feature set
- Supports ATA/ATAPI LBA48bit addressing mode
- Supports dual LUN (Logic Unit Number) with automatically master/slave enumeration
- High-Speed Data Transfer, Low Power Consumption
- Red / green LED's indicating operation
- Operating System Support: Windows® 98SE/ME/2000/XP/2003/Vista

221227 / DA-70148-1
USB 2.0 IDE & SATA cable

DIGITUS® USB 2.0 SATA adapter

- Easily connect external SATA, SATAII hard disk with USB
- No extra driver needed
- Incl. USB extension cable, eSata to SATA and eSATA to eSATA cable
- Support OS: Windows® 2000/XP/Vista, MacOS/9 (9.2.2 recommendations) and 10.2.8 or 10.3 OSX recommendation

205388 / DA-70149
USB 2.0 SATA adapter

DIGITUS® USB 2.0 eSATA adapter

- Easily connect external SATA, SATAII hard disk with USB
- No extra driver needed
- Incl. eSATA connection cable
- With one-touch backup function, software based
- Support OS: Windows® 2000 / XP / Vista
  MacOS/9 (9.2.2 recommendations) and 10.2.8 or 10.3 OSX recommendation

239284 / DA-70149-1
USB 2.0 eSATA adapter

DIGITUS® USB fingerprint-sensor - USB stick version

- Fingerprint-Sensor for efficient, high security and convenience access to the notebook computer
- Never need anymore passwords, only the users thumb
- User-friendly integration of fingerprint authentication for login, internet access and applications
- The delivered software manage logins, users passwords and data encryption for files, folders and virtual drives and inserts the user data automatically in required data fields after successful fingerprint scan
- Semiconductor sensor, swipe type
- 192x16pixel, 8bit/pixel, 508dpi resolution
- ESD +/- 15kV
- False rejection rate < 1:1.000
- False acceptance rate < 1:1.000.000
- Matching time < 1 second
- USB 1.1 interface / bus powered
- Power LED
- Supports Windows® 2000/XP/Vista

206019 / DA-70700
USB fingerprint-sensor - USB stick version

DIGITUS® USB fingerprint-sensor - desktop version

- Fingerprint-Sensor for efficient, high security and convenience access to the computer
- Never need anymore passwords, only the users thumb
- User-friendly integration of fingerprint authentication for login, internet access and applications
- The delivered software manage logins, users passwords and data encryption for files, folders and virtual drives and inserts the user data automatically in required data fields after successful fingerprint scan
- Semiconductor sensor, swipe type
- 192x16pixel, 8bit/pixel, 500dpi resolution
- ESD +/- 15kV
- False rejection rate < 1:2.000
- False acceptance rate < 1:100.000
- Matching time < 1 second
- USB 2.0 interface / bus powered
- Power LED
- Supports Windows® 2000/XP

206057 / DA-70701
USB fingerprint-sensor - desktop version

DIGITUS® Wireless PC lock

- The computer automatically enters „Lock Mode", when the user is away from the computer
- The computer automatically resumes to normal operation when the user is back to the non secure area
- Effective range: around 2 to 3 meters
- Once the computer enters the „Lock Mode" a password is required to use the computer if the transmitter / receiver pair is not available to unlock the PC
- Software driver: Support Windows® 98SE/ME/2000/XP/VistaApplication:
- For parents to prevent children from using PC too much time
- People who using PC/Notebook in public

174851 / DA-70755
Wireless PC lock

Enjoy connections. Live.

DIGITUS® USB 1.1 sharing switch

- Fulfils the USB 1.1 specification
- Use one (DA-70123 / DA-70124) or two (DA-70125) USB 1.1 / 2.0 devices with two (DA-70123) or four (DA-70124 / DA70125) PCs
- Keyboard hot-key switching between the devices / PCs
- Operating system support for Windows® 98/ME/2000/XP and MAC OS 9/10.x
- No additional power supply required – power supply via USB

123682 / DA-70123
USB sharing switch 2 PCs with 1 USB device

123699 / DA-70124
USB sharing switch 4 PCs with 1 USB device

DIGITUS® USB 2.0 sharing switch

- Corresponds to specification USB 2.0
- Use one or two USB 1.1 / 2.0 devices with two (DA-70135) or four (DA-70136) PCs
- Keyboard hot-key switching between the devices / PCs
- Operating system support for Windows® 98/ME/2000/XP and MAC OS 9/10.x, Vista
- No additional power supply required
- Power supply via USB

161684 / DA-70135
USB sharing switch 2 PCs with 1 USB devices

161691 / DA-70136
USB sharing switch 4 PCs with 1 USB devices

DIGITUS® USB 1.1 extender

- USB 1.1 compatible
- Supports all conventional USB Devices, such as scanner, printer, cameras etc.
- Maximum cable length between send and receive unit 60 m
- Connection with standard Cat.5e UTP patch cable
- Only the send and receive unit are included

233626 / DA-70139-1
USB 1.1 extender

DIGITUS® USB docking extension cable

- Use this USB extension for extending distances
- Easy USB port access on your desk
- Elegantly styled base designed specifically to provide secure platform for USB devices that needto stand in upright position
- Comply with USB 1.1 / 2.0 version
- 1.5m cable length

166160 / DA-DEC-B
USB 2.0 docking extension cable desktop stand

DIGITUS® USB 2.0 repeater cable

- Expands the maximum permissible USB cable length by 5.0 m
- A maximum of 3 repeater cables can be combined for a total cable length of 20 m
- Compatible with USB specification revision 2.0 and 1.1
- USB A male - USB A female, cable length 5 m
- Supports USB low speed (1.5Mbps), full speed (12Mbps) and high speed (480Mbps)
- USB hot plug and play support
- Plastic housing with aluminiumdesign
- Suitable for USB 2.0 devices with their own power supply
- Support for the following operating systems: Windows® XP

233923 / DA-70130-3
USB 2.0 repeater cable

DIGITUS® USB to serial adapter, USB 1.1

- Compliant with USB 1.1 standard
- Supports RS 232 serial interface
- Maximum data transfer rate of over 1Mbps
- Can be used for PDA and modems
- USB extension cable also supplied / approx. 80cm long
- Support for following operating systems:Windows® 98/2000/XP/ Vista/Linux and Mac OS V8.6
- Chipset: PROLIFIC PL-2303HX

170419 / DA-70145
USB to serial adapter, USB 1.1

DIGITUS® USB to serial adapter, USB 2.0

- Compliant with USB 2.0 standard
- Supports RS 232 serial interface
- Maximum data transfer rate of over 1Mbps
- Can be used for PDA and modems
- USB extension cable also supplied / approx. 80cm long
- Support for following operating systems:
- Windows® 98SE/2000/XP/Vista/Linux and Mac OS V8.6
- Chipset: FTDI / FT232BM

170426 / DA-70146
USB to serial adapter, USB 2.0

DIGITUS® USB 1.1 -> PS/2 adapter

- Compatible with USB specification revision 1.1
- Supports PCs and SUN computers
- 2 x MiniDIN 6-pin female for PS/2 mouse and keyboard
- Power supply for the connected USB devices via the port
- USB Hot Plug and Play support
- USB connector cable with USB A male
- Software requirements: Win 98SE/ ME/2000/ XP/Vista

117933 / DA-70118
USB 1.1 -> PS/2 Adapter

DIGITUS® USB printer cable

- Compatible with USB specification revision 1.1
- USB A male <=> CENT 36-pin male
- Supports EPP / ECP and bidirectional printing
- Data transfer up to 1,216Mbps in ECP mode

166306 / DC USB-PM1
USB printer cable, grey

DIGITUS® USB 2.0 LED cable set

- 3 Pcs. USB Extension cable (green. blue, red)
- USB A plug to USB A jack length 1,5m
- integrated color LED Light
- compliant with USB 2.0 standard
- included USB Adapter A to B and USB A to Mini 5pin

171652 / DC USB2-LED
USB 2.0 LED cable set

DIGITUS® USB 2.0 docking station with network port

- The ideally solution for Notebooks and Subnotebooks
- USB 2.0 and USB 1.1 compatible
- Connections:1 x DSUB 9 / Serial
  2 x MiniDIN 6 / PS/
  2 Mouse and Keyboard
  2 x USB A / for another USB devices
  1 x eSATA / for another SATA device
  1 x USB B / for PC connection
  1 x RJ 45 / Network
- Incl. manual and power supply
- Suitable for Windows® XP/Vista

233633 / DC DOCK5
USB 2.0 docking station with network port

DIGITUS® multifunction USB 2.0 docking station with network port

- The ideally solution for Notebooks and Subnotebooks
- USB 2.0 and USB 1.1 compatible
- Connections back:1 x DSUB 9 / serial
  2 x MiniDIN 6 / PS/2 mouse and keyboard
  2 x USB A / for another USB devices
  1 x eSATA / for SATA devices
  1 x USB B / for PC connection
  1 x RJ 45 / Network
- Connections front:1 x 53 in 1 card reader für Compact Flash (CF) series, Memory Stick (MS / M2) series, Smart Media (SM) series, Secure Digital (SD / SDHC) series, Micro SD (T-Flash)2 x USB A / for another USB devices1 x Audio microphone1 x Audio speaker
- LED indicator for power und card reader
- Incl. manual and power supply
- Suitable for Windows® XP / Vista

233640 / DC DOCK6
Multifunction USB 2.0 docking station with network port

DIGITUS® Notebook cooler pad

- Metallcase
- 2 powerfull, silent Fan
- 3 Port USB 2.0 Hub integrated (DA-70341)
- 4 Slot Multicardreader with USB 2.0 Interface is integrated (DA-70341)
- Support for: CompactFlash, Micro Drive, Memory Stick, Memory Stick pro,
- Secure Digital, MultiMedia Card
- Support für Windows® 98/2000/XP/Vista

205753 / DA-70341
Notebook cooler pad with hub and card reader

205760 / DA-70342
Notebook cooler pad

DIGITUS® External 3.5" floppy drive, USB 1.1

- Compact and light
- Floppy type: 2HD (double sided high density)
- Floppy storage capacity: 1.44 MB
- No external power supply required for operation
- Operating voltage 5V DC via the USB bus
- Maximum achievable data transmission rate of 12Mbps
- PNP capable to USB 1.1System requirements:iMac, iBook, G3 or G4 with available USB port (USB 1.1 or USB 2.0)IBM compatible PC with available USB port (USB 1.1 or USB 2.0)Operating system requirements:Mac OS 8.6 or higher Windows® 98 SE/ME/2000 or XP

204473 / DA-70490-A
External 3.5" floppy drive, USB 1.1

DIGITUS® USB traveller kit

4 part USB travel kit in a case:
- 1x USB 2.0 4-port portable hub
- Red LED for power indicationBus poweredUSB Type A cable connector can be stowed within the body
- 1x USB light
- Flexible gooseneck designPowered by USB portProvide bright environment for ultra-light LED
- 1 x USB optical mini mouse
- Designed with retractable cable
- Easy internet surfing and Windows® browsing
- 800 dpi resolution
- 1 x USB keypad
- 18 numeric keys
- One power LED
- Dimension (LxWxH): 110x75x14.5mm
- High quality zipped travelling bag (LxWxH): 224x157x46

189503 / DA-70790
USB traveller kit

DIGITUS® Numeric keyboard USB

- Compliant with USB standard
- Plug & play
- Selfpowered
- LED indicator for activity
- Operating Voltage: 5V max. 250 mA
- Dimension:134x94x20mm
- Vista compatible

200185 / DA-20220-1
Numeric Keyboard USB

DIGITUS® USB LED lamp

- White LEDs (efficient and energy saving)
- Powered by the USB port of a PC or Notebook
- Universal clip
- Clearly illuminates the keyboard or documents in low light environments
- Turns on when PC is powered up
- Cable length 0.8m

183501 / DA-70756
USB LED light

185697 / DA-70757
USB LED light with flexible gooseneck

DIGITUS® Notebook - car / airplane power converter

- Individual polarity and voltage setting
- Input voltage 12V/DC via DC on-board power socket or airplane adapter
- Voltage multiplier for setting the output voltage, selectable: 15/16/18/19/20V/24VDC at 5.0 A max
- Maximum power consumption of the consumer 3500mA
- Built-in surge protection
- Input protection 10 A (Flink)
- 5 notebook adapters as well as a special adapter for the Apple iBook included

151722 / DA-10213
Notebook - car / airplane power converter

DIGITUS® PC ATX power supply tester

Wrong dimensioned and faulty PC power supplies result in an instable computer system can damage the hardware. Troubleshooting such a faulty system usually took much time and was complex. But now this compact, fast and easy device shows the proper status of all supplied voltages at a glance.

- ATX power supply tester
- Shows the accurate status of all power supply voltages
- Fast and easy plug & play operation
- Connectors for testing with 20 / 24 pin mainboard connectors, 4, 6 and 8pin extension connectors as well as floppy and SATA connectors
- Robust aluminium housing
- Essential for service personnel and computer enthusiasts

200178 / DA-70601
PC ATX power supply tester with LCD

DIGITUS® Reusable cable ribbons, pack of 5 pcs.

- Velcro fastener
- Five different colours
- Total length 16cm
- Width 16mm

170334 / DA-CT4001
Cable ties, 5 pcs.

DIGITUS® 3.5" HDD cooler kit

This kit is designed for installing 3.5'' hard drives in 5.25'' bays
Two fans are integrated into the front panel to cool the hard drive.
3.5'' HDD bracket included

071945 / DA-60201
3,5" HDD cooler kit, 2 fans

DIGITUS® 2.5" hard drive installation kit including 2.5"-> 3,5 adapter

To install 2.5" hard drives in 3.5" drive slotsSupplied:

- Two metal installation brackets including screws,
- Adapter for 40 pin IDE cable and power supply adapter

170372 / DA-70430
2,5" hard drive installation kit

DIGITUS® Notebook Case, Smart Business Line

- Designed in Germany
- Interior fully padded with variable inside dividers
- Two hook and loop bands for securing the notebook
- Various inside pockets
- Including flat zipper pocket in front
- Padded grip and shoulder strap
- Color: black
- Material: High quality tweed nylon
- Exterior dimensions: 34cm (W) x 28.5cm (H) x 9.5cm (D)

up to 14"

127628 / DA-10203
Notebook Case, Smart Business Line

DIGITUS® Notebook Case, Smart Business Line

- Designed in Germany
- Interior fully padded with variable inside dividers
- Two hook and loop bands for securing the notebook
- Various inside pockets
- Including flat zipper pockets on front and back
- Padded grip and shoulder strap
- Color: black
- Material: High quality tweed nylon
- Exterior dimensions: 34cm (W) x 28.5cm (H) x 12cm (D)

up to 14"

127635 / DA-10204
Notebook Case, Smart Business Line

DIGITUS® Notebook Case, Business Line

- Designed in Germany
- Interior fully padded with variable inside dividers
- Two hook and loop bands for securing the notebook
- Various inside pockets
- Including flat zipper pockets on front and back
- Padded grip and shoulder strap
- Material: High quality tweed nylon
- Color: black
- Exterior dimensions: 40,5cm (W) x 30,5cm (H) x 15cm (D)

up to 15.4"

127642 / DA-10205
Notebook Case, Business Line

DIGITUS® Notebook Case, Smart Business Line

- Designed in Germany
- High-quality material
- Various inside pockets, pocket with pressure catch in front with inside divider
- (e.g. mobile phone pocket, pen holders etc.)
- Zipper bag with document pocket in back
- Color: black
- Exterior dimensions: 41.5cm (W) x 31.5cm (H) x 10,5cm (D)

up to 15.4"

159667 / DA-10216
Notebook Case, Smart Business Line

DIGITUS® Notebook Case, Business Line

- Designed in Germany
- Inside fully padded with variable inside dividers
- Extra-deep
- Two hook and loop bands for securing the notebook
- Various inside pockets
- Includes two zipper pockets on front and one on back
- Padded grip and shoulder strap
- Material: High quality tweed nylon
- Color: black
- Exterior dimensions: 40.5cm (W) x 30.5cm (H) x 15cm (D)

up to 15.4"

127659 / DA-10206
Notebook Case, Business Line

DIGITUS® Notebook Case, Smart Travel

- Designed in Germany
- Interior fully padded with variable inside dividers
- Extra-deep
- Two hook and loop bands for securing the notebook
- Various inside pockets
- Including flat zipper pocket in front
- Padded grip and shoulder strap
- 3-fold telescoping grip
- 2 ball-bearing castors and 2 stabile and slip-proof plastic feet
- Material: High quality tweed nylon
- Color: black
- Exterior dimensions: 40.5 cm (W) x 30.5 cm (H) x 15 cm (D)

up to 15.4"

127666 / DA-10207
Notebook Case, Smart Travel

DIGITUS® Notebook Case, Smart Travel

- Designed in Germany
- Interior fully padded with variable inside dividers
- Extra-deep
- Two hook and loop bands for securing the notebook
- Various inside pockets
- Including two zipper pockets on front and one on back
- Padded grip and shoulder strap
- 3-fold telescoping grip
- 2 ball-bearing castors and 2 stabile and slip-proof plastic feet
- Material: High quality tweed nylon
- Color: black
- Exterior dimensions: 36.5cm (W) x 34cm (H) x 15cm (D)

up to 15.4"

127673 / DA-10208
Notebook Case, Smart Travel

DIGITUS® Backpack Travel

- Designed in Germany
- High-quality material in black colour
- Two large inside pockets, one with document pocket and one padded suitable for notebook
- Front zipper pocket with telephone and business card compartment and pen holders
- Carry handle and padded carry strap
- Document compartment: 30cm (W) x 40,5 cm (H) x 2cm (D)
- Exterior dimensions: 31cm (W) x 42cm (H) x 10cm (D)

up to 15.4"

159681 / DA-10218
Back Pack Travel

DIGITUS® CD-ROM and DVD Cases

- DVD / CD Slim Case
- Transparent plastic
- Packaging unit: 10 Pcs.

132875 / DA-CD-SC
CD/DVD Slim Type Case, 10 pcs.

DIGITUS® CD-ROM and DVD Cases

- DVD / CD Jewel Case
- Transparent plastic
- Packaging unit: 10 Pcs.

132882 / DA-CD-JC
CD/DVD Jewel Case, 10 pcs.

DIGITUS® CD-ROM and DVD Cases

- For one DVD/CD with additional manual
- Packaging unit: 5 Pcs.
- Dimension: 190x130x5mm

176206 / DA-DVD-SC
CD/DVD Single Case, 5 pcs

DIGITUS® CD-ROM and DVD Cases

- For two DVD's / CD's
- Packaging unit: 5 Pcs.
- Dimension: 190x130x5mm

132899 / DA-DVD-DC
CD/DVD Double Case, 5 pcs.

DIGITUS® CD/DVD Storage Case for 48 CDs

- High-quality material, colour black
- Dimension: 17cm (W) x 17cm (H) x 7,5cm (D)

136019 / DA-10210
CD/DVD Storage Case, 48 CDs

DIGITUS® CD/DVD Storage Case for 48 CDs

- High-quality material, colour black
- Dimension: 29cm (W) x 16cm (H) x 4cm (D)

136026 / DA-10211
CD/DVD Case, 48 CDs

DIGITUS® CD/DVD Storage Case for 96 CDs

- High-quality material, colour black
- Dimension: 18cm (W) x 17cm (H) x 7,5cm (D)

136033 / DA-10212
CD/DVD Case, 96 CDs

DIGITUS® CD/DVD Storage Case for 200 CDs

- High-quality material, colour black
- Dimension: 31cm (W) x 32cm (H) x 10cm (D)

179801 / DA-10220
CD/DVD Storage Case, 200 CDs

DIGITUS® Wall mount for TFT displays

- Supports VESA standard dimensions (75x75mm and 100x100mm)
- Net weight: 0.8kg; overall length 80mm; max. load capacity 15kg
- LCD monitor can be turned by: 360

239376 / DA-90307
Wall mount for TFT displays

DIGITUS® Wall mount for TFT displays

- Small hook attachment for wall mounting
- Supports VESA standard dimensions (75x75mm and 100x100mm)
- Net weight: 0.5kg Dimensions 114 x 114 x 21.5mm
- Maximum load capacity: 30kg

239369 / DA-90303
Wall mount

DIGITUS® TFT display swivel arm for wall mounting

- Easy to install
- Can be moved in any direction
- Supports VESA standard dimensions (75x75mm and 100x100mm)
- Net weight: 2.0kg; maximum length: 311mm
- Max. load capacity: 10kg
- Monitor can be turned: 180°
- Excellent space saving solution

239345 / DA-90305
For wall mounting

DIGITUS® TFT display swivel arm for table mounting

- Easy to install thanks to special table clamp
- Can be moved in any direction
- Supports VESA standard dimensions (75x75mm and 100x100mm)
- Net weight: 2.0kg
- Overall length: 520mm
- Max. height: 315mm
- Max. load capacity: 10kg
- Maximum thickness of the tabletop 75mm
- LCD monitor can be turned: 180°
- Excellent space saving solution

239352 / DA-90306
For table mounting

DIGITUS® Wall mount for LCD/TFT TV

- Small wall mounting for up to 42" LCD/TFT TV's
- Supports VESA standard dimensions (100x200mm and 200x200mm)
- Net weight: 1.7kg Dimensions 230x230x25,3mm
- Maximum load capacity: 70kg
- Projection: 25mm

239383 / DA-90310
Wall mount for LCD/TFT TV

DIGITUS® LCD wall mount for up to 42" TV

- Simple heavy loading wall mount for up to 42" LCD/TFT TV
- Easy to install and 360° flexibile
- Meets VESA standards (200x100 100x100mm)
- Weight: 2kgs, 185x450x85mm (WxBxH)
- Loading: 50kgs
- Swivel left & right: 20 degrees
- Pivot upwards & downwards: 20 degrees
- LCD monitor swivel: 360 degrees

239390 / DA-90311
LCD wall mount for up to 42" TV

DIGITUS® LCD wall mount for up to 32" TV

- Articulating wall mount for up to 32" LCD/TFT TV
- Easy installation and strong combination both
- Meets VESA standards (75x75mm/200x100mm/100x100mm/200x200mm)
- Loading: 32kgs
- Swivel left & right: 20 / 180 degrees
- Pivot upwards & downwards: 20 degrees

239406 / DA-90312
LCD wall mount for up to 32" TV

DIGITUS® LCD/Plasma wall mount for up to 65" TV

- Universal adjustable wall mount and tilting for 65" LCD/Plasma TV
- Easy installation and strong combination both
- Weight: 4.9kgs, 760x800x520mm (WxBxH)
- Loading: 80kgs
- Pivot upwards and downwards: 26°

239413 / DA-90313
LCD/Plasma wall mount for up to 65" TV

DIGITUS® Wireless LAN broadband router, 802.11n Draft 2.0

This broadband router complies with Draft 802.11n next generation wireless standard. Utilizing the advanced MIMO technology, it can support the data transmission rate of up to 300Mbps and the coverage distance is far than IEEE 802.11g/b products. Stable wireless connection and high bandwidth enable you to enjoy rich media network applications without any interruption.

- Complies with 2.4GHz Draft 802.11n and backward compatible with IEEE 802.11g/b standards
- High-speed data rate–up to 300Mbps
- Supports 64/128-bit WEP Encryption and WPA-PSK, WPA2-PSK Security
- Suitable for all common network environments
- NAT/NAPT IP Sharing
- Anti-DoS Firewall
- Virtual Server/DMZ
- Supports WMM function to meet the multimedia data bandwidth requirement.
- Supports advanced MIMO technology, enhancing the throughput and coverage range significantly
- Supports Special Applications(Port Triggers)
- Supports DDNS(DynDNS, TZO)
- VPN Pass Through(IPSec/PPTP)
- Obtain WAN IP by PPPoE/Static IP/PPTP/DHCP
- DHCP Server
- Web User Interface (Remote Configuration)
- System Status/Security Log
- Upgradeable Firmware
- 1x RJ45 WAN Port
- 4x RJ45 LAN Ports
- Dimensions: 30x187x100mm
- Incl. Switching Power Supply 12V/1A
- Two transmitting channels, three receiving channels

221821 / DN-7059
2T3R Wireless LAN broadband router, 802.11n Draft 2.0

DIGITUS® Wireless LAN PCI Express adapter, 802.11n Draft 2.0

This PCI Express adapter complies with Draft 802.11n next generation wireless standard. Utilizing the advanced MIMO technology, it can support the data transmission rate of up to 300Mbps and the coverage distance is far than IEEE 802.11g/b products. Stable wireless connection and high bandwidth enable you to enjoy rich media network applications without any interruption.

- Complies with 2.4GHz Draft 802.11n and backward compatible with IEEE 802.11g/b standards
- High-speed data rate-up to 300Mbps
- Supports 64/128-bit WEP Encryption and WPA-PSK, WPA2-PSK Security
- Suitable for all common network environments
- Supports advanced MIMO technology, enhancing the throughput and coverage range significantly
- Supports QoS-WMM, WMM-PS function to meet the multimedia data bandwidth requirement
- Supports WPS(WiFi Protected Setup)
- PCI Express interface
- Status LEDs for Link and data transfer
- Drivers for Windows® 2000/XP/XP64/Windows® Vista
- Two transmitting channels, three receiving channels

221869 / DN-7057
2T3R Wireless LAN PCI Express adapter, 802.11n Draft 2.0

DIGITUS® Wireless LAN PCI adapter, 802.11n Draft 2.0

This PCI adapter complies with Draft 802.11n next generation wireless standard. Utilizing the advanced MIMO technology, it can support the data transmission rate of up to 300Mbps and the coverage distance is far than IEEE 802.11g/b products. Stable wireless connection and high bandwidth enable you to enjoy rich media network applications without any interruption.

- Complies with 2.4GHz Draft 802.11n and backward compatible with IEEE 802.11g/b standards
- High-speed data rate–up to 300Mbps
- Supports 64/128-bit WEP Encryption and WPA-PSK, WPA2-PSK Security
- Suitable for all common network environments
- Supports advanced MIMO technology, enhancing the throughput and coverage range significantly
- Supports QoS-WMM, WMM-PS function to meet the multimedia data bandwidth requirement
- Supports WPS(WiFi Protected Setup)
- 32-bit PCI interface
- Status LEDs for Link and data transfer
- Drivers for Windows® 2000/XP/XP64/Windows® Vista
- Two transmitting channels, three receiving channels

221845 / DN-7056
2T3R Wireless LAN PCI adapter, 802.11n Draft 2.0

DIGITUS® Wireless LAN USB 2.0 adapter, 802.11n Draft 2.0

This USB adapter complies with Draft 802.11n next generation wireless standard. Utilizing the advanced MIMO technology, it can support the data transmission rate of up to 300Mbps and the coverage distance is far than IEEE 802.11g/b products. Stable wireless connection and high bandwidth enable you to enjoy rich media network applications without any interruption.

- Complies with 2.4GHz Draft 802.11n and backward compatible with IEEE 802.11g/b standards
- High-speed data rate – up to 300Mbps
- Supports 64/128-bit WEP Encryption and WPA-PSK, WPA2-PSK Security
- Suitable for all common network environments
- Supports advanced MIMO technology, enhancing the throughput and coverage range significantly
- Supports QoS-WMM, WMM-PS function to meet the multimedia data bandwidth requirement
- Supports WPS (WiFi Protected Setup)
- USB 2.0 interface
- Status LEDs for Link and data transfer
- Drivers for Windows® 2000/XP/XP64/Windows® Vista
- One transmitting channels, two receiving channels

221838 / DN-7053
1T2R Wireless LAN USB 2.0 adapter, 802.11n Draft 2.0

DIGITUS® Wireless LAN cardbus adapter, 802.11n Draft 2.0

This cardbus adapter complies with Draft 802.11n next generation wireless standard. Utilizing the advanced MIMO technology, it can support the data transmission rate of up to 300Mbps and the coverage distance is far than IEEE 802.11g/b products. Stable wireless connection and high bandwidth enable you to enjoy rich media network applications without any interruption.

- Complies with 2.4GHz Draft 802.11n and backward compatible with IEEE 802.11g/b standards
- High-speed data rate – up to 300Mbps
- Supports 64/128-bit WEP Encryption and WPA-PSK, WPA2-PSK Security
- Suitable for all common network environments
- Supports advanced MIMO technology, enhancing the throughput and coverage range significantly
- Supports QoS-WMM, WMM-PS function to meet the multimedia data bandwidth requirement
- Supports WPS (WiFi Protected Setup)
- 32-bit cardbus interface
- Status LEDs for Link and data transfer
- Drivers for Windows® 2000/XP/XP64/Windows® Vista
- Two transmitting channels, three receiving channels

221852 / DN-7051
2T3R Wireless LAN cardbus adapter, 802.11n Draft 2.0

DIGITUS® Wireless LAN ExpressCard adapter, 802.11n Draft 2.0

This ExpressCard adapter complies with Draft 802.11n next generation wireless standard. Utilizing the advanced MIMO technology, it can support the data transmission rate of up to 300Mbps and the coverage distance is far than IEEE 802.11g/b products. Stable wireless connection and high bandwidth enable you to enjoy rich media network applications without any interruption.

- Complies with 2.4GHz Draft 802.11n and backward compatible with IEEE 802.11g/b standards
- High-speed data rate – up to 300Mbps
- Supports 64/128-bit WEP Encryption and WPA-PSK, WPA2-PSK Security
- Suitable for all common network environments
- Supports advanced MIMO technology, enhancing the throughput and coverage range significantly
- Supports QoS-WMM, WMM-PS function to meet the multi-media data bandwidth requirement
- Supports WPS (WiFi Protected Setup)
- PCIe ExpressCard interface
- Status LEDs for Link and data transfer
- Drivers for Windows® 2000/XP/XP64/Windows® Vista
- Two transmitting channels, three receiving channels

221876 / DN-7052
2T3R Wireless LAN ExpressCard adapter, 802.11n Draft 2.0

DIGITUS® Wireless LAN PCI adapter, 802.11n Draft 2.0

This PCI adapter complies with Draft 802.11n next generation wireless standard. Utilizing the advanced MIMO technology, it can support the data transmission rate of up to 300Mbps and the coverage distance is far than IEEE 802.11g/b products. Stable wireless connection and high bandwidth enable you to enjoy rich media network applications without any interruption.

- Complies with 2.4GHz Draft 802.11n and backward compatible with IEEE 802.11g/b standards
- High-speed data rate – up to 300Mbps
- Supports 64/128-bit WEP Encryption and WPA-PSK, WPA2-PSK Security
- Suitable for all common network environments
- Supports advanced MIMO technology, enhancing the throughput and coverage range significantly
- Supports QoS-WMM, WMM-PS function to meet the multimedia data bandwidth requirement
- Supports WPS (WiFi Protected Setup)
- 32-bit PCI interface
- Status LEDs for Link and data transfer
- 2 antennas (1T2R)

243298 / DN-7066
1T2R Wireless LAN PCI adapter, 802.11n Draft 2.0

DIGITUS® Wireless LAN broadband ADSL2+ modem router, 802.11g

- Integrated modem
- ITU-T G.992.3 G.992.4 for ADSL2+
- Downstream up to 24Mbps and Upstream up to 2Mbps
- Compatible to DSL and ADSL
- IEEE 802.11b, IEEE 802.11g, IEEE 802.3 and IEEE 802.3u compatible
- Supported Wireless LAN data rates 54, 11, 5.5, 2.0, 1.0Mbps
- 128 Bit WEP (wired equivalent privacy) encryption
- Wireless fidelity protected access (WPA)
- Broadband routing and IP sharing via xDSL or cable modem
- Comprehensive NAT / SPI firewall
- 4 x RJ 45 LAN, 1 x RJ11 (ADSL)

221975 / DN-7016-1
Wireless LAN broadband ADSL2+ modem router (Annex B)

211945 / DN-7016-A
Wireless LAN broadband ADSL2+ modem router (Annex A)

DIGITUS® Wireless LAN Broadband Router, 802.11g

- Usable for DSL / Cable - Modem
- Wireless LAN 802.11g, 54Mbps
- Support for WEP, WPA, WPA2 encryption
- Indoor range approx. 35～100m, outdoor range 100～300m
- 4-port 10/100M Ethernet switch
- Auto MDI / MDI X Fast Ethernet switch
- NAT & SPI Firewall security, DOS detection
- DDNS and SNMP support
- DHCP server support
- Web-based management

211952 / DN-7019
Wireless LAN Broadband Router 802.11g

DIGITUS® Wireless LAN access point, 802.11g

- Adds High-Speed Wireless Access to the Wired Network
- Wireless LAN 802.11g/b, up to 54Mbps
- Supports WDS repeater mode, AP client mode and bridging mode
- 128-bit WEP encryption, WPA / WPA2 security
- ESSID authentication / MAC address control
- Supports roaming link integrity
- Built in DHCP Server
- Web-based configuration

197492 / DN-7018
Wireless LAN access point, 802.11g

DIGITUS® Wireless LAN PCI adapter, 802.11g

- IEEE 802.11b and IEEE 802.11g compatible
- 32bit PC card compatible
- Supported data transfer rates 54,11,5.5,2.0,1.0Mbps
- 128bit WEP (Wired equivalent privacy) encryption
- Support for WPA and WPA2
- Realtek-Chipset
- Suitable for all current network environments
- Support for Windows® ME/2000/XP/Vista

233138 / DN-7006GT
Wireless LAN PCI adapter, 802.11g

DIGITUS® Wireless LAN USB 2.0 adapter, 802.11g

- IEEE 802.11b and IEEE 802.11g compatible
- Compliant to USB 2.0 standard
- Supported data transfer rates 54,11,5.5,2.0,1.0Mbps
- 128bit WEP (Wired equivalent privacy) encryption
- WPA and WPA2 encryption (Wireless fidelity protected access)
- Realtek-Chipset
- Suitable for all current network environments
- Support for Windows® 98SE/ME/2000/XP/Vista

211969 / DN-7003GT
Wireless LAN USB 2.0 adapter, 802.11g

DIGITUS® Wireless LAN cardbus adapter, 802.11g

- IEEE 802.11b and IEEE 802.11g compatible
- 32bit PC card compatible
- Supported data rates 54, 11, 5.5, 2.0, 1.0Mbps
- 128bit WEP (Wired equivalent privacy) encryption
- Support for WPA and WPA2
- Realtek-Chipset
- Suitable for all current network environments
- Support for Windows® ME/2000/XP/Vista

233121 / DN-7001GT
Wireless LAN cardbus adapter, 802.11g

DIGITUS® Wireless LAN rod antenna

- Wireless LAN high performance rod antenna
- Frequency range: 2,4-2,4835GHz
- Gain: 5.0 dBi (reception)
- Omnidirectional
- Suitable for IEEE 802.11a,b,g
- Connected via RP-SMA socket
- Length: 19.7cm diameter: 12mm
- Suitable for all DIGITUS® Wireless LAN products
- Suitable stand: DN-70101 or DN-70106

179221 / DN-70100
Wireless LAN rod antenna, 5 dBi

DIGITUS® Wireless LAN rod antenna



- Wireless LAN high performance rod antenna
- Frequency Range: 2,4-2,4835GHz
- Omnidirectional
- Gain: 7 dBi (reception)
- Suitable for 2,4GHz WLAN - IEEE 802.11b / g
- Connected via RP-SMA socket
- Length: 30cm diameter: 1.3cm
- Suitable for all DIGITUS® Wireless LAN products
- Suitable stand: DN-70106



200550 / DN-70104
Wireless LAN rod antenna, 7 dBi

DIGITUS® Wireless LAN rod antenna

- Wireless LAN high performance rod antenna
- Frequency Range: 2,4-2,4835GHz
- Omnidirectional
- Gain: 9 dBi (reception)
- Suitable for 2,4GHz WLAN - IEEE 802.11b / g
- Connected via RP-SMA socket
- Length: 38.5cm, diameter: 1.3cm
- Suitable for all DIGITUS® Wireless LAN products
- Suitable stand: DN-70106

200567 / DN-70105
Wireless LAN rod antenna, 9 dBi

DIGITUS® Wireless LAN flat antenna



- Wireless LAN high performance flat antenna
- Frequency Range: 2,4-2,4835GHz
- Gain: 5.0 dBi (reception)
- Omnidirectional
- Suitable for IEEE 802.11a,b,g
- Connection via RP-SMA socket
- Dimensions: 16.5x2.6x0.6cm
- Delivery includes hook and loop fastener
- Suitable for use with all DIGITUS® Wireless LAN products



233497 / DN-70107
Wireless LAN flat antenna, 5 dBi

DIGITUS® Wireless LAN patch antenna

- Wireless LAN high performance patch antenna
- Frequency Range: 2,4-2,4835GHz
- Gain: 10.0 dBi (reception)
- Directional antenna
- Suitable for IEEE 802.11a,b,g
- Connection via RP-SMA socket
- Dimensions: 10x7.5x2.2cm
- Delivery includes adjustable wall bracket and adapter
- Can be used indoors and outdoors
- Suitable for use with all DIGITUS® Wireless LAN products



187530 / DN-70102
Wireless LAN patch antenna, 10 dBi

DIGITUS® Wireless LAN sector antenna

- Wireless LAN heavy-duty sector antenna
- Frequency Range: 2,4–2,4835GHz
- Impedance: 50 ± 5
- Gain: 12dBi (reception)
- Directional antenna
- Polarization: Vertical
- Weight: 300g ± 20g
- Connector type: RP-SMA socket
- Cable Type: RG-316
- Cable length: 1m
- Dimension: 23.3x11x5cm
- Color: grey
- Suitable for use with all DIGITUS® Wireless LAN products



192749 / DN-70103
Wireless LAN sector antenna, 12 dBi

DIGITUS® Magnetic stand for wireless LAN antennas

- Cable length 0.75m
- Connecting plug: RP-SMA socket
- High power magnet
- Antenna stand: RP-SMA male
- Antenna stand: diameter: 43mm height: 48mm

179238 / DN-70101
Magnetic stand for wireless LAN antenna

DIGITUS® Stand for wireless LAN antennas

- Antenna stand for using with Wireless LAN rod antennas
- RP-SMA connectors
- Suitable for 2,4GHz wireless LAN - IEEE 802.1b/g and all DIGITUS® wireless LAN products
- Connection cable length: 0.75m

200574 / DN-70106
Stand for wireless LAN antennas

DIGITUS® Stand for wireless LAN antennas 802.11n / MIMO

- Antenna stand for using with wireless LAN rod antennas
- RP-SMA connectors
- Suitable for 2.4GHz wireless LAN - IEEE 802.11n / MIMO
- Connection cable length 1.5m
- Diameter: 105mm

233503 / DN-70108
Stand for wireless LAN antennas 802.11n / MIMO

DIGITUS® High-speed Powerline Ethernet adapter, 200Mbps

- Powerline High-speed Ethernet Bridge with Ethernet connection (RJ-45) for shared Internet access via DSL modem over the existing indoor power network
- Data transmission rates of up to 200Mbps over the building's own power network
- Range of up to 150 meters through rooms and across floors
- Eavesdropping security through integrated encryption process
- Particularly compact shape-no larger than a plug-in power adapter
- Supports the operating systems Microsoft Windows® 98SE/ME/2000/XP/Vista

PC Pr@xis 12/2007
Price/Performance good
Quality very good

240778 / DN-15019
High-speed Powerline Ethernet adapter, 200Mbps

DIGITUS® High-speed Powerline Ethernet adapter, 85Mbps

- Powerline high-speed Ethernet Bridge with Ethernet connection (RJ-45) for shared Internet access via DSL modem over the existing indoor power network
- Data transmission rates of up to 85Mbps over the building's own power network
- Range of up to 150 meters through rooms and across floors
- Eavesdropping security through integrated encryption process
- Particularly compact design-no larger than a plug-in power adapter
- 3 Country specific plugs included
- Supports the operating systems Microsoft Windows® 98SE/ME/2000/XP/Vista

233466 / DN-15013
High-speed Powerline Ethernet adapter, 85Mbps

DIGITUS® NAS, 2-port SATA HDD enclosure

- 2 drawer driver bays designed to easily customize for various storage needs
- Built-in FTP and Samba server
- Gigabit Ethernet
- Supports CIFS, FAT32, ext2, ext3 file systems
- Provides USB mass storage sharing function
- Share files via FTP or Network Neighborhood
- FTP/HTTP download agent
- Supports P2P download (Bit Torrent)
- Supports Media Server
- Supports iTunes Server
- Supports USB disk Auto-Copy function
- Web Configuration

243250 / DN-7024
NAS for 2 SATA HDDs, 2 USB mass storage devices

DIGITUS® Nano NAS server for USB storage devices

- NAS function (Network Attached Storage) to provide centralized data access and storage to the network
- Easy provides storage space for expansion, sharing and backup to the whole network
- RJ45 network connector for Fast Ethernet 10/100Mbps
- Easy installation an administration by web interface-no additional driver software needed
- Provides FTP file server and SAMBA cross platform support
- Supported protocols: TCP/IP (Net BIOS Name Server), Microsoft Networks (CIFS/SMB), HTTP1.0 and HTML2.0, DHCP Server/Client (auto detection)

243267 / DN-7023
Nano NAS server for USB storage devices

DIGITUS® External IDE to LAN + USB enclosure

- External enclosure for 3,5" hard disk drives with RJ45 network and USB 2.0 connectors
- NAS function (Network Attached Storage) to provide centralized data access and storage to the network
- Easy provides storage space for expansion, sharing and backup to the whole network
- Ideal, cost-efficient and mobile „stand alone" solution for office or home users
- RJ45 network connector for Fast Ethernet 10/100Mbps
- High speed USB 2.0 port to serve as an external HDD connected to a computer, up to 480Mbps data transfer rate
- Internal Ultra ATA 133 IDE Interface
- Easy installation an administration by web interface - no additional driver software needed
- Provides FTP file server platform support
- Supported protocols: TCP/IP (Net BIOS Name Server), Microsoft Networks (CIFS/SMB), HTTP1.0 and HTML2.0, DHCP Server / Client (auto detection), SNTP Client and Telnet Server
- LED indicators for operation, connection, data transfer
- Hot pluggable, hot swappable and Plug-n-Play capable
- Housing material aluminium, plastic
- Supported OS: Windows® 98SE/2000/ME/XP/Vista and MAC OS X

222347 / DA-70516
External IDE to LAN + USB enclosure

233565 / DA-70520
External SATA to LAN + USB enclosure

DIGITUS® Internet broadband multifunction router

- Compatible with IEEE 802.3
- Ports: 1x WAN, 4x LAN(10/100 MBit/s), 2x USB 2.0 (compatible with 1.1)
- Supports Port Trigger, Virtual DMZ, IP-Sharing, Virtual Server, DDNS and many more
- Extra security due to hardware firewall, NAT, URL and MAC address filter
- FTP server for FAT12, 16 and FAT32 file systems
- Support for USB Storage(HDD and Memory Sticks)
- Print server for the most common available USB printers, support for one printer
- Configuration via the integrated web interface, also via Internet
- Nice housing Design with integrated LED's
- Webcam images can be accessed via web browser
- Power supply included
- Dimension: 129x101x26mm

211921 / DN-11009
Internet broadband multifunction router

DIGITUS® ADSL2+ broadband modem router

- Integrated Modem ITU-T G.992.3 G.992.4 G.922.5 (ADSL2 / ADSL2+)
- Downstream up to 24Mbps and Upstream up to 2Mbps
- Compatible to ADSL
- Supported protocols: TCP/IP, PPPoE, PPPoA
- Functions: NAT, DHCP Server, DDNS, DMZ, Port forwarding
- LED indicator for: ADSLs+ activity, switching hub and Power LED
- Broadband routing and IP sharing via xDSL or cable modem
- Comprehensive NAT / SPI firewall
- 4x RJ 45 LAN, 1x RJ11 (ADSL)

221968 / DN-11008-1
ADSL2+ broadband modem router (Annex B)

211938 / DN-11008-A
ADSL2+ broadband modem router (Annex A)

DIGITUS® 10/100Mbps Fast Ethernet PCI network card

- Realtek Chipset
- IEEE 802.3 and IEEE 802.3u compatible
- 20/200Mbit full duplex
- PCI Local Bus Rev.2.1 and 2.2 compatible
- Suitable for all typical network environments

228677 / DN-1001J
Fast Ethernet network card

DIGITUS® 10/100Mbps Fast Ethernet cardbus adapter

- IEEE 802.3 and IEEE 802.3u compatible
- 32 Bit PC-Card compatible
- 20/200 Mbit in full duplex
- PCI Local Bus Rev.2.1 and 2.2 compatible
- Suitable for all typical network environments
- Support: Windows® 98/98SE/ME/2000/XP/Vista

136736 / DN-2002C
Fast Ethernet network cardbus adapter

DIGITUS® 10/100Mbps Fast Ethernet USB adapter

- Ethernet IEEE 802.3 10BaseT compatible, USB 1.1 full speed (up to 12Mbps)
- 1x RJ-45(STP) port, USB female type A
- Realtek chipset
- Plug & Play
- Power supply via USB bus
- Suitable for all typical network environments(Vista excluded)
- Support for Windows® ME/98SE/2000/XP/Vista

190653 / DN-3015
10/100Mbps Fast Ethernet USB 1.1 adapter

DIGITUS® 10/100Mbps Fast Ethernet USB 2.0 adapter

- Ethernet IEEE 802.3 10BaseT compatible, USB 2.0 full speed (up to 100Mbps)
- 1x RJ-45(STP) port, USB female type A
- ASIX chipset
- Plug & Play
- Power supply via USB bus
- Suitable for all typical network environments
- Support for 2000/XP/2003/Vista 32 and Vista 64

202806 / DN-3016-A
10/100Mbps Fast Ethernet USB 2.0 adapter

DIGITUS® Fast Ethernet N-Way 5-port desktop switch

- IEEE 802.3 and IEEE 802.3u compatible
- 20/200MBit full duplex
- Automatic speed and half / full duplex detection / configuration
- Store and forward architecture
- Auto MDI / MDI-X function
- External power supply

202929 / DN-5001D
N-Way desktop switch, 5-port

DIGITUS® Fast Ethernet N-Way 8-port desktop switch

- IEEE 802.3 and IEEE 802.3u compatible
- 20/200MBit full duplex
- Automatic speed and half/full duplex detection / configuration
- Store and forward architecture
- Auto MDI / MDI-X function

136750 / DN-5002C
N-Way desktop switch, 8-port

DIGITUS® Fast Ethernet N-Way 16-port desktop switch

- IEEE 802.3 and IEEE 802.3u compatible
- 20/200 MBit full duplex
- Automatic speed and half/full duplex detection / configuration
- Store and forward architecture
- Auto MDI / MDI-X function
- External power supply

193234 / DN-5003D
N-Way desktop switch, 16-port

DIGITUS® Fast Ethernet N-Way 16-port 19" switch

- IEEE 802.3 and IEEE 802.3u compatible
- 20/200 MBit full duplex
- Automatic speed and half / full duplex detection / configuration
- Store and forward architecture
- Auto MDI / MDI-X function
- Internal power supply

193241 / DN-6001D
N-Way switch, 16-port

DIGITUS® Fast Ethernet N-Way 24-port 19" switch

- IEEE 802.3 and IEEE 802.3u compatible
- 20/200MBit full duplex
- Automatic speed and half / full duplex detection / configuration
- Store and forward architecture
- Auto MDI / MDI-X function
- Internal power supply

136781 / DN-6002C
N-Way switch, 24-port

DIGITUS® Fast Ethernet print server, parallel

- Complies with IEEE 802.3, IEEE 802.3u Wired Ethernet standards
- Provides one parallel port to connect to printer
- Supports TCP/IP, IPX/SPX, NetBEUI and AppleTalk network protocols
- Supports LPR, IPP, SMB/TCP, Raw Printing and Unix Logical printing protocols
- Supports Peer-to-Peer Printing (TCP/IP/IPX/NetBEUI/AppleTalk)
- Supports Server-based printing (Novell NetWare and Windows®)
- Compatible with all major operating systems (Windows® 95/98/Me/NT/2000/XP/Vista, NetWare 3.x and above, Unix/Linux)
- Supports DHCP Server and Client protocol
- Supports Web-based management, Windows® Configuration Utility and SNMP protocol
- Provides easy-to-use installation, setup and diagnostic programs
- Incl. Power Supply

209782 / DN-13001-W
Fast Ethernet print server, 1-port parallel

DIGITUS® Fast Ethernet print server, USB 2.0

- Complies with IEEE 802.3, IEEE 802.3u Wired Ethernet standards
- Provides one USB 2.0 port to connect to printer
- Supports TCP/IP, IPX/SPX, NetBEUI and AppleTalk network protocols
- Supports LPR, IPP, SMB/TCP, Raw Printing and Unix Logical printing protocols
- Supports Peer-to-Peer Printing (TCP/IP/IPX/NetBEUI/AppleTalk)
- Supports Server-based printing (Novell NetWare and Windows®)
- Compatible with all major operating systems (Windows® 95/98/Me/NT/2000/XP/Vista, NetWare 3.x and above, Unix/Linux)
- Supports DHCP Server and Client protocol
- Supports Web-based management, Windows® Configuration Utility and SNMP protocol
- Provides easy-to-use installation, setup and diagnostic programs
- Incl. Power Supply

221913 / DN-13003-W
Fast Ethernet print server, 1-port USB

DIGITUS® 3-Port Fast Ethernet print server

- Comply with IEEE 802.3, IEEE 802.3u Wired Ethernet standards
- Provides two USB 2.0 and one parallel port to connect the printers
- Supports TCP/IP, IPX/SPX, NetBEUI, Rendezvous, AppleTalk and IPv6 network protocols
- Supports LPR, IPP, Raw Printing and Unix Logical printing protocols
- Supports Peer-to-Peer Printing (TCP/IP/IPX/NetBEUI/AppleTalk)
- Supports Server-based printing (Novell NetWare and Windows®)
- Compatible with all major operating systems (Windows® 95/98/Me/NT/2000/XP/Vista, NetWare 3.x and above, Unix/Linux)
- Supports DHCP Server and Client protocol
- Supports Web-based management and Windows® Configuration Utility
- Provides easy-to-use installation, setup and diagnostic programs
- Incl. Power Supply

221883 / DN-13006-W
Fast Ethernet print server, 2-port USB, 1-port parallel

DIGITUS® Mini multifunctionserver with USB 2.0 interface

Print- File- and Scanserver in one device

- Share USB 2.0 High-speed Devices on the network
- Provide one USB 2.0 High-speed host port
- Share Printers, Storage Devices and Scanner on the Network
- NetUSB integrated
- Share USB Harddisk(FAT 16 and FAT 32), flashdrive and Cardreader
- Support Single user NTFS hard drive access
- Support SMB/CIFS and FTP file server with user level security
- LAN: 10/100Mbps
- Provides Windows® Tool for Windows® 98SE/ME/2000/2003/XP/Vista
- Supports Easy Setup through Web Browser
- Dimension: (LxWxH) 79x60x22mm

211853 / DN-13008
Mini multifunctionserver with USB interface

DIGITUS® Multifunctionserver with USB 2.0 interface

Print- File- and Scanserver in one device.

- Share USB 2.0 devices on the network
- Provides two USB 2.0 host ports
- Share Printers, Storage Devices and Scanner on the Network
- NetUSB integrated
- Share USB Harddisk (FAT16 and FAT32), flashdrive and Cardreader
- Support Single user NTFS hard drive access
- Support SMB/CIFS and FTP file server with user level security
- LAN: 10/100Mbps
- Provides Windows® Tool for Windows® 98SE/ME/2000/2003/XP/Vista
- Supports Easy Setup through Web Browser
- Dimension: (LxWxH) 100x70x26mm

198727 / DN-13007
Multifunctionserver with USB interface

DIGITUS® Wireless LAN multifunctionserver with USB 2.0 interface, 802.11g

Wireless Print- File- and Scanserver in one device.

- Share USB 2.0 High-speed Devices on the network
- Provide two USB 2.0 High-speed host port
- Share Printers, Storage Devices and Scanner on the Network
- NetUSB integrated
- Share USB Harddisk (FAT 16 and FAT 32), flashdrive and Cardreader
- Support Single user NTFS hard drive access
- Support SMB/CIFS and FTP file server with user level security
- LAN: 10/100Mbps
- Wireless LAN IEEE 802.11g, 54Mbps
- Provides Windows® Tool for Windows® 2000/2003/XP/Vista
- Supports Easy Setup through Web Browser
- Dimension: (LxWxH) 103x74x25mm

211860 / DN-13018
Wireless LAN multifunctionserver with USB interface

DIGITUS® Wireless LAN print server, USB 2.0

- Share printers with a USB port to all PCs through wired or wireless Network
- Complies with IEEE 802.3, IEEE 802.3u wired Ethernet and IEEE 802.11g/b Wireless LAN standards
- Supports 10/100Mbps speed in wired networks and up to 54Mbps data rate in Wireless LAN networks
- Provides one USB 2.0 port to connect to printer
- Supports TCP/IP, IPX/SPX, NetBEUI and AppleTalk network protocols and LPR, IPP, SMB/TCP, Raw Printing and Unix Logical printing protocols
- Supports peer-to-peer printing (TCP/IP/IPX/NetBEUI/AppleTalk) and server-based printing (Novell NetWare and Windows®).
- Compatible with all major operating systems (Windows® 95/98SE/Me/NT/2000/XP/2003/Vista, NetWare (3.x above), MAC OS and Unix/Linux).
- Supports DHCP Server and Client protocol
- Supports Web-based management and Windows® Configuration Utility
- Provides easy-to-use installation and setup program
- Supports fault-tolerant firmware upgrade capability

200413 / DN-13014
Wireless LAN print server with USB 2.0 interface

DIGITUS® Wireless LAN print server, parallel

- Share printers with a Centronics port to all PCs through wired or wireless Network.
- Complies with IEEE 802.3, IEEE 802.3u wired Ethernet and IEEE 802.11g/b Wireless LAN standards
- Supports 10/100Mbps speed in wired networks and up to 54Mbps data rate in Wireless LAN networks
- Provides one Centronics port to connect to the printer
- Supports TCP/IP, IPX/SPX, NetBEUI and AppleTalk network protocols and LPR, IPP, SMB/TCP, Raw Printing and Unix Logical printing protocols
- Supports peer-to-peer printing (TCP/IP/IPX/NetBEUI/AppleTalk) and server-based printing (Novell NetWare and Windows®).
- Compatible with all major operating systems (Windows® 95/98SE/Me/NT/2000/XP/2003/Vista, NetWare (3.x above), MAC OS and Unix/Linux)
- Supports DHCP Server and Client protocol
- Supports Web-based management and Windows® Configuration Utility
- Provides easy-to-use installation and setup program
- Supports fault-tolerant firmware upgrade capability

200420 / DN-13016
Wireless LAN print server with Centronics interface

DIGITUS® Gigabit Ethernet PCI card adapter, 32 Bit

- Realtek chipset
- PCI Local Bus Master Rev.2.1 and 2.2 compatible
- IEEE 802.3, IEEE 802.3u, IEEE 802.3ab compatible
- IEEE 802.3x full-duplex Flowcontrol
- Supports 10 / 100 / 1.000Mbps
- Supports Autonegotiation and Crossover detection
- Supports Wake On LAN function and IEEE 802.1Q VLAN tagging
- Suitable for all typical network environments
- Supports Windows® Vista/XP/ME/2000/98SE

223542 / DN-1011-1
Gigabit network card, 32 Bit

DIGITUS® Gigabit Ethernet PCI Express card adapter

- Supports 10 / 100 / 1.000Mbps auto negotiation
- Supports Auto MDI / MDIX crossover at all speed
- Supports Wake On LAN (WOL) power management
- Compliant with 10 / 100 / 1.000 IEEE 802.3 specification
- Compliant with PCI Express Base Specification 1.0a
- Installs in any available PCI Express slot with different lane width
- Supports Windows® 2000/XP/Server 2003/Vista

228080 / DN-1013-1
Gigabit Ethernet PCI Express card

DIGITUS® Gigabit Ethernet USB 2.0 adapter

- Ethernet IEEE 802.3 100BaseT compatible
- USB 2.0 full speed (up to 480Mbps)
- ASIX chipset
- 1 x RJ-45 (STP) port, USB female type A
- Compliant with 10/100/1000Mbps standard
- Plug & Play
- Power supply via USB bus
- Suitable for all typical network environments
- Supports Windows® 98SE/ME/2000/XP/Vista 32 and Vista 64

233510 / DN-3022
Gigabit Fast Ethernet USB 2.0 adapter

DIGITUS® Gigabit Ethernet cardbus adapter, 32 Bit

- Realtek Chipset
- IEEE 802.3, IEEE 802.3u, IEEE 802.3z and IEEE 802.3x compatible
- 20 / 200 / 2000 Mbit full duplex
- 32 bit PC card compatible
- Suitable for all current network environments
- Supports Windows® 98/98SE/ME/2000/XP/Vista

174417 / DN-2004
Gigabit Network cardbus , 32 Bit

DIGITUS® Gigabit desktop N-Way 5-port switch

- IEEE802.3 Ethernet, IEEE802.3u Fast Ethernet, IEEE802.3ab Gigabit Ethernet compatible
- Half / full duplex operation at 10/100Mbps, full duplex at 1000Mbps
- Automatic speed and half / full duplex recognition / adjustment
- 20 / 200 / 2000 Mbit in full duplex mode
- Auto MDI / MDI-X function
- 1K MAC addresses
- External power supply

228172 / DN-8007C2
Gigabit desktop switch, 5-port

228165 / DN-8006C2
Gigabit desktop switch, 8-port

DIGITUS® Manageable Web Smart 16-port switch with 4 SFP slots

- IEEE802.3, IEEE802.3u, IEEE802.3z and IEEE 802.3x compatible
- Automatic speed and half/full duplex detection / configuration
- Auto MDI / MDI-X function
- 8K MAC adresses, 340KB on chip frame buffer
- QOS support layer 4 classification
- Port Mirroring
- VLAN for Performance & Security
- Port Trunk for Bandwidth Aggregation
- 4 SFP Ports for fiber module
- Built-in Web-based management
- Built-in switched power supply

229131 / DN-8021B
Manageable gigabit 16-port switch with 4 SFP slots

DIGITUS® Manageable Web Smart 24-port switch with 4 SFP slots

- IEEE802.3, IEEE802.3u, IEEE802.3z and IEEE 802.3x compatible
- Automatic speed and half/full duplex detection / configuration
- Auto MDI / MDI-X function
- 8K MAC adresses, 340KB on chip frame buffer
- QoS support layer 4 classification
- Port Mirroring
- VLAN for Performance & Security
- Port Trunk for Bandwidth Aggregation
- 4 Dual Media Ports (SFP) for Flexible Fiber connection
- Built-in Web-based management
- Built-in switched power supply

229148 / DN-8022B
Manageable gigabit 24-port switch with 4 SFP slots

DIGITUS® SFP fiberoptic transceiver module

- Compliant with IEEE 802.3z Gigabit Ethernet Standard
- Class 1 Laser product compliant with EN 60825-1
- Differential LVPECL input and output
- Hot pluggable
- TTL Signal detect indicator

190752 / DN-8100
Duplex SFP module MM/LC 850nm

190769 / DN-8101
Duplex SFP module SM/LC 1310nm / 10km

190776 / DN-8102
Duplex SFP module SM/LC 1550nm / 30km

190783 / DN-8103
Simplex SFP module BiDi SM/LC 1550nm / 20km

190813 / DN-8104
Simplex SFP module BiDi SM/LC 1310nm / 20km

254553 / DN-8105
Duplex SFP module MM/LC 1310nm

254560 / DN-8106
Simplex SFP module BiDi SM/LC 1550nm / 10km

254577 / DN-8107
Simplex SFP module BiDi SM/LC 1310nm / 10km

254621 / DN-8108
Simplex SFP module BiDi SM/SC 1550nm / 10km

254638 / DN-8109
Simplex SFP module BiDi SM/SC 1310nm / 10km

DIGITUS® IP / Analog Surveillance Camera

- Motion detection and alarm notification
- Real time MPEG4 or MJPEG network transmission
- Low-latency video streaming for sharp and clear images
- Hybrid digital / analog video output
- Control camera via Central Management System (CMS) software - up to 16 cameras simultaneously.
- Mobile Surveillance with a J2ME supporting Cell phone
- Resolution: 738x480 (420 TV-Lines)

249504 / DN-16050
IP / Analog Surveillance Camera

DIGITUS® IP / Analog Day & Night Surveillance Camera

- Day & Night vision (IR)
- Built-in microphone & External microphone input
- Motion detection and alarm notification
- Real time MPEG4 or MJPEG network transmission
- Low-latency video streaming for sharp and clear images
- Hybrid digital / analog video output
- Control camera via Central Management System (CMS) software - up to 16 cameras simultaneously.
- Mobile Surveillance with a J2ME supporting Cell phone
- Resolution: 738x480 (420 TV-Lines)
- External audio out

249535 / DN-16051
IP / Analog Day & Night Surveillance Camera

DIGITUS® IP / CCTV Outdoor Speed Dome Camera

- 22x optical zoom with auto focus
- Intelligent auto tracking function to follow intruders
- Area Zoom functions – Draw a square in the live view with your mouse and the PTZ network camera will zoom in the assigned area.
- Supports low light environment of 1 Lux
- External microphone input
- Motion detection and alarm notification
- Real time MPEG4 or MJPEG network transmission
- Low-latency video streaming for sharp and clear images
- Hybrid digital / analog video output
- Control camera via Central Management System (CMS) software - up to 16 cameras simultaneously.
- Mobile Surveillance with a J2ME supporting Cell phone
- Resolution: 752x582 (480 TV-Lines)

Illustration
DN-16055/DN-16056

249573 / DN-16055
IP / CCTV Outdoor Speed Dome Camera

251712 / DN-16056
Wall mount accessory

252696 / DN-16057
Power supply unit

DIGITUS® IP digital pan & tilt network camera

- Supports digital Pan-Tilt-Zoom function
- Provides 179 degrees horizontal and 99 degrees vertical viewing angle
- Display all views promptly and instantly, no need to wait for motor pan and tilt actions
- Motion-JPEG Image Video
- Adjustable fixed focus lens, F = 2.0
- Recording Format - Video (AVI), Snapshot (JPEG)
- High Speed Hardware-Based Image Compression
- Easy Installation by Setup Wizard
- Includes easy-to-use Viewer & Recorder utility
- Provides Admin utility, Camera Viewer & WEB browser Management
- View multiple cameras simultaneously - Up to 4 at a time
- Supports four additional user accounts for viewing the camera
- Manual/Schedule/Cycle Record, Video Playback, Forward, Pause and Stop
- Auto sending Snapshot by E-mail and FTP
- Supports Motion-Detection
- Firmware Upgradeable
- Supports Windows® 98/ME/2000/XP/2003/Vista

221890 / DN-16041
IP digital pan & tilt network camera

221906 / DN-16042
Wireless LAN IP digital pan & tilt network camera

DIGITUS® IP network camera

The most complete, full featured and all-in-one network camera system.
Ideal for all purposes of remote surveillance and security applications.

- Video recording and image capturing over the LAN network and internet
- IR LED illumination for night vision and low light capability
- High sensitivity microphone for audio transmission
- SD-Card slot for image storage
- TV-out / video connector for using with analogue video equipment like VCR
- Powerful motion detection – trigger setting to Email / FTP / SD-Card
- Integrated webserver supports standalone operation with direct internet connection
- Protocol support for Mail- / FTP- / DDNS- / DHCP- / NTP-Server
- PPPoE protocol support for direct ADSL modem connection
- Resolution up to 640x480 pixel at up to 15 fps
- ¼" CMOS high quality image sensor
- Lens with F2,8 and 54 degrees viewing angle
- Focus from 30mm to infinity
- Automatic exposure and white balance
- JPEG image compression, 4 x digital zoom
- 1 x RJ45 10/100Mbps network connector
- Power and LAN activity LEDs / Reset button

216018 / DN-16023
IP network camera

DIGITUS® IP pan & tilt network camera

The most complete, full featured and all-in-one network camera system with motorized pan & tilt function. Ideal for all purposes of remote surveillance and security applications.

- Video recording and image capturing over the LAN network and internet
- Motorized pan & tilt function
- IR LED illumination for night vision and low light capability
- High sensitivity microphone for audio transmission
- SD-Card slot for image storage
- TV-out / video connector for using with analogue video equipment like VCR
- Trigger setting to Email / FTP / SD-Card
- Integrated webserver supports standalone operation with direct internet connection
- Protocol support for Mail- / FTP- / DDNS- / DHCP- / NTP-Server
- PPPoE protocol support for direct ADSL modem connection
- Resolution up to 640x480 pixel at up to 15 fps
- ¼" CMOS high quality image sensor
- Lens with F2,8 and 54° viewing angle
- Focus from 30mm to infinity
- Horizontal left / right pan +/- 175°
- Vertical up / down tilt +180 / -35°
- Automatic exposure and white balance
- JPEG image compression, 4 x digital zoom
- 1 x RJ45 10/100Mbps network connector
- Power and LAN activity LEDs / Reset button

216025 / DN-16032
IP pan & tilt network camera

DIGITUS® CAT 5e patch cables

- Shielded and unshielded CAT 5e patch cables
- 4 x 2 AWG 26/7, twisted pair, 100 Ohm
- 2 x RJ45 Connectors
- Boot with kink protection and strain relief
- Spot length on boot

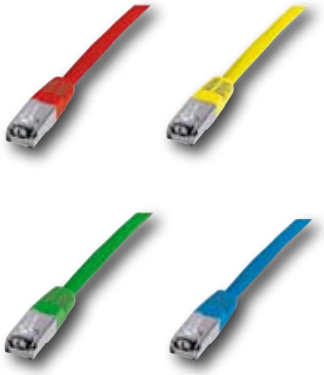

In DIGITUS® polybag!

CAT 5e U-UTP, unshielded

	grey	red	yellow	green	blue	black	white
0,5 m	DK-1511-005	DK-1511-005/R	DK-1511-005/Y	DK-1511-005/G	DK-1511-005/B	DK-1511-005/BLACK	DK-1511-005/WH
1,0 m	DK-1511-010	DK-1511-010/R	DK-1511-010/Y	DK-1511-010/G	DK-1511-010/B	DK-1511-010/BLACK	DK-1511-010/WH
1,5 m	DK-1511-015	DK-1511-015/R	DK-1511-015/Y	DK-1511-015/G	DK-1511-015/B	DK-1511-015/BLACK	DK-1511-015/WH
2,0 m	DK-1511-020	DK-1511-020/R	DK-1511-020/Y	DK-1511-020/G	DK-1511-020/B	DK-1511-020/BLACK	DK-1511-020/WH
3,0 m	DK-1511-030	DK-1511-030/R	DK-1511-030/Y	DK-1511-030/G	DK-1511-030/B	DK-1511-030/BLACK	DK-1511-030/WH
5,0 m	DK-1511-050	DK-1511-050/R	DK-1511-050/Y	DK-1511-050/G	DK-1511-050/B	DK-1511-050/BLACK	DK-1511-050/WH
7,0 m	DK-1511-070	DK-1511-070/R	DK-1511-070/Y	DK-1511-070/G	DK-1511-070/B	DK-1511-070/BLACK	DK-1511-070/WH
10,0 m	DK-1511-100	DK-1511-100/R	DK-1511-100/Y	DK-1511-100/G	DK-1511-100/B	DK-1511-100/BLACK	DK-1511-100/WH
15,0 m	DK-1511-150	DK-1511-150/R	DK-1511-150/Y	DK-1511-150/G	DK-1511-150/B	DK-1511-150/BLACK	DK-1511-150/WH
20,0 m	DK-1511-200	DK-1511-200/R	DK-1511-200/Y	DK-1511-200/G	DK-1511-200/B	DK-1511-200/BLACK	DK-1511-200/WH
25,0 m	DK-1511-250	DK-1511-250/R	DK-1511-250/Y	DK-1511-250/G	DK-1511-250/B	DK-1511-250/BLACK	DK-1511-250/WH
30,0 m	DK-1511-300	DK-1511-300/R	DK-1511-300/Y	DK-1511-300/G	DK-1511-300/B	DK-1511-300/BLACK	DK-1511-300/WH

CAT 5e F-UTP, foil shielded

	grey	red	yellow	green	blue	black	crossover
0,3 m							DK-1521-003-CO
0,5 m	DK-1521-005	DK-1521-005/R	DK-1521-005/Y	DK-1521-005/G	DK-1521-005/B	DK-1521-005/BL	DK-1521-005-CO
1,0 m	DK-1521-010	DK-1521-010/R	DK-1521-010/Y	DK-1521-010/G	DK-1521-010/B	DK-1521-010/BL	DK-1521-010-CO
2,0 m	DK-1521-020	DK-1521-020/R	DK-1521-020/Y	DK-1521-020/G	DK-1521-020/B	DK-1521-020/BL	DK-1521-020-CO
3,0 m	DK-1521-030	DK-1521-030/R	DK-1521-030/Y	DK-1521-030/G	DK-1521-030/B	DK-1521-030/BL	DK-1521-030-CO
5,0 m	DK-1521-050	DK-1521-050/R	DK-1521-050/Y	DK-1521-050/G	DK-1521-050/B	DK-1521-050/BL	DK-1521-050-CO
7,0 m	DK-1521-070	DK-1521-070/R	DK-1521-070/Y	DK-1521-070/G	DK-1521-070/B	DK-1521-070/BL	
10,0 m	DK-1521-100	DK-1521-100/R	DK-1521-100/Y	DK-1521-100/G	DK-1521-100/B	DK-1521-100/BL	DK-1521-100-CO
15,0 m	DK-1521-150						DK-1521-150-CO
20,0 m	DK-1521-200						DK-1521-200-CO
30,0 m	DK-1521-300						DK-1521-300-CO
50,0 m	DK-1521-500						

CAT 5e SF-UTP, foil and braid shielded

	grey	red	yellow	green	blue	black	CROSSOVER
0,5 m	DK-1531-005	DK-1531-005/R	DK-1531-005/Y	DK-1531-005/G	DK-1531-005/B	DK-1531-005/BL	DK-1531-005-CO
1,0 m	DK-1531-010	DK-1531-010/R	DK-1531-010/Y	DK-1531-010/G	DK-1531-010/B	DK-1531-010/BL	DK-1531-010-CO
2,0 m	DK-1531-020	DK-1531-020/R	DK-1531-020/Y	DK-1531-020/G	DK-1531-020/B	DK-1531-020/BL	DK-1531-020-CO
3,0 m	DK-1531-030	DK-1531-030/R	DK-1531-030/Y	DK-1531-030/G	DK-1531-030/B	DK-1531-030/BL	DK-1531-030-CO
5,0 m	DK-1531-050	DK-1531-050/R	DK-1531-050/Y	DK-1531-050/G	DK-1531-050/B	DK-1531-050/BL	DK-1531-050-CO
7,0 m	DK-1531-070	DK-1531-070/R	DK-1531-070/Y	DK-1531-070/G	DK-1531-070/B	DK-1531-070/BL	
10,0 m	DK-1531-100	DK-1531-100/R	DK-1531-100/Y	DK-1531-100/G	DK-1531-100/B	DK-1531-100/BL	DK-1531-100-CO
15,0 m	DK-1531-150	DK-1531-150/R	DK-1531-150/Y	DK-1531-150/G	DK-1531-150/B	DK-1531-150/BL	DK-1531-150-CO
20,0 m	DK-1531-200	DK-1531-200/R	DK-1531-200/Y	DK-1531-200/G	DK-1531-200/B	DK-1531-200/BL	DK-1531-200-CO
30,0 m	DK-1531-300	DK-1531-300/R	DK-1531-300/Y	DK-1531-300/G	DK-1531-300/B	DK-1531-300/BL	DK-1531-300-CO

DIGITUS® CAT 6 patch cables

- Shielded and unshielded CAT 6 patch cables
- 4 x 2 AWG 26/7, twisted pair, 100 Ohm
- 2 x RJ45 Connectors
- Boot with kink protection and strain relief
- Spot length on boot

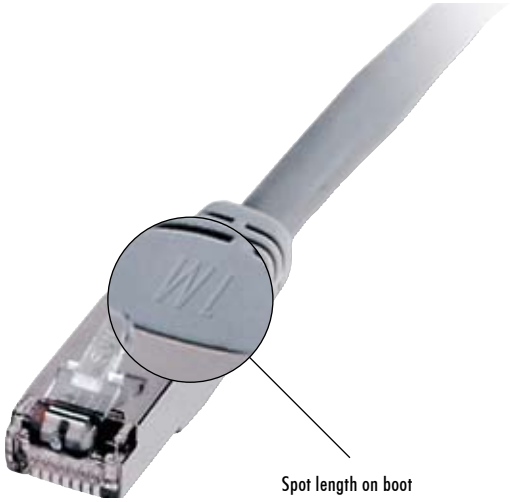

In DIGITUS® polybag!

CAT 6 U-UTP, unshielded

	grey	red	yellow	green	blue	black	white
0,5 m	DK-1611-005	DK-1611-005/R	DK-1611-005/Y	DK-1611-005/G	DK-1611-005/B	DK-1611-005/BL	DK-1611-005/WH
1,0 m	DK-1611-010	DK-1611-010/R	DK-1611-010/Y	DK-1611-010/G	DK-1611-010/B	DK-1611-010/BL	DK-1611-010/WH
2,0 m	DK-1611-020	DK-1611-020/R	DK-1611-020/Y	DK-1611-020/G	DK-1611-020/B	DK-1611-020/BL	DK-1611-020/WH
3,0 m	DK-1611-030	DK-1611-030/R	DK-1611-030/Y	DK-1611-030/G	DK-1611-030/B	DK-1611-030/BL	DK-1611-030/WH
5,0 m	DK-1611-050	DK-1611-050/R	DK-1611-050/Y	DK-1611-050/G	DK-1611-050/B	DK-1611-050/BL	DK-1611-050/WH
7,0 m	DK-1611-070	DK-1611-070/R	DK-1611-070/Y	DK-1611-070/G	DK-1611-070/B	DK-1611-070/BL	DK-1611-070/WH
10,0 m	DK-1611-100	DK-1611-100/R	DK-1611-100/Y	DK-1611-100/G	DK-1611-100/B	DK-1611-100/BL	DK-1611-100/WH
15,0 m	DK-1611-150	DK-1611-150/R	DK-1611-150/Y	DK-1611-150/G	DK-1611-150/B	DK-1611-150/BL	DK-1611-150/WH
20,0 m	DK-1611-200	DK-1611-200/R	DK-1611-200/Y	DK-1611-200/G	DK-1611-200/B	DK-1611-200/BL	DK-1611-200/WH
30,0 m	DK-1611-300	DK-1611-300/R	DK-1611-300/Y	DK-1611-300/G	DK-1611-300/B	DK-1611-300/BL	DK-1611-300/WH

CAT 6 S-FTP, PIMF

	grey	red	yellow	green	blue	black	crossover
0,5 m	DK-1641-005	DK-1641-005/R	DK-1641-005/Y	DK-1641-005/G	DK-1641-005/B	DK-1641-005/BL	DK-1641-005-CO
1,0 m	DK-1641-010	DK-1641-010/R	DK-1641-010/Y	DK-1641-010/G	DK-1641-010/B	DK-1641-010/BL	DK-1641-010-CO
2,0 m	DK-1641-020	DK-1641-020/R	DK-1641-020/Y	DK-1641-020/G	DK-1641-020/B	DK-1641-020/BL	DK-1641-020-CO
3,0 m	DK-1641-030	DK-1641-030/R	DK-1641-030/Y	DK-1641-030/G	DK-1641-030/B	DK-1641-030/BL	DK-1641-030-CO
5,0 m	DK-1641-050	DK-1641-050/R	DK-1641-050/Y	DK-1641-050/G	DK-1641-050/B	DK-1641-050/BL	DK-1641-050-CO
7,0 m	DK-1641-070	DK-1641-070/R	DK-1641-070/Y	DK-1641-070/G	DK-1641-070/B	DK-1641-070/BL	DK-1641-070-CO
10,0 m	DK-1641-100	DK-1641-100/R	DK-1641-100/Y	DK-1641-100/G	DK-1641-100/B	DK-1641-100/BL	DK-1641-100-CO
15,0 m	DK-1641-150						DK-1641-150-CO
20,0 m	DK-1641-200						DK-1641-200-CO
30,0 m	DK-1641-300						DK-1641-300-CO

DIGITUS® CAT 5e U-UTP twisted pair cable

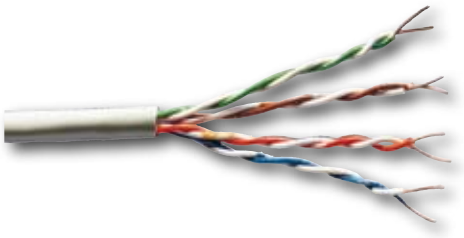

- Unshielded CAT 5e twisted pair cable
- PVC
- 3P CAT 5e certified
- According to EIA/TIA 568 B.2, EN 50173-1, ISO/IEC 11801

241072 / DK-1511-V-1
100m box, Installation cable (AWG 24/1)
241089 / DK-1511-V-305
305m box, Installation cable (AWG 24/1)
241096 / DK-1511-P-1
100m box, Patch cable (AWG26/7)
241102 / DK-1511-P-305
305m box, Patch cable (AWG 26/7)

DIGITUS® CAT 6 U-UTP twisted pair cable

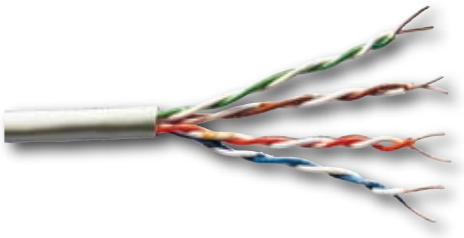

- Unshielded CAT 6 twisted pair cable
- PVC
- 3P certified
- According to EIA/TIA 568 B.2, EN 50173-1, ISO/IEC 11801

241225 / DK-1611-V-1
100m, Installation cable (AWG 23/1)
241232 / DK-1611-V-305
305m, Installation cable (AWG 23/1)
241249 / DK-1611-P-1
100m, Patch cable (AWG 26/7)
241256 / DK-1611-P-305
305m, Patch cable (AWG 26/7)

DIGITUS® CAT 5e F-UTP twisted pair cable

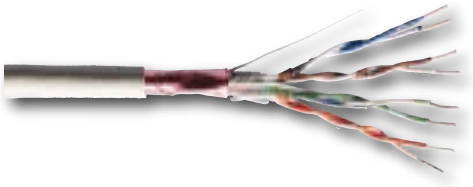

- Foil shielded CAT 5e twisted pair cable
- PVC
- According to EIA/TIA 568 B.2, EN 50173-1, ISO/IEC 11801

241119 / DK-1521-V-1
100m, Installation cable (AWG 24/1)
241126 / DK-1521-V-305
305m, Installation cable (AWG 24/1)
241133 / DK-1521-P-1
100m, Patch cable (AWG 26/7)
241188 / DK-1521-P-305
305m, Patch cable (AWG 26/7)

DIGITUS® CAT 5e SF-UTP twisted pair cable

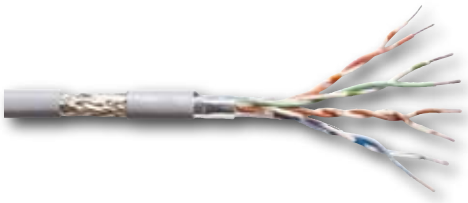

- Foil and braid shielded CAT 5e twisted pair cable
- According to EIA/TIA 568 B.2, EN 50173-1, ISO/IEC 11801

241157 / DK-1531-V-1
100m, Installation cable (AWG 24/1)
241164 / DK-1531-V-305
305m, Installation cable (AWG 24/1)
241201 / DK-1531-VH-1
100m, Installation cable (AWG 24/1), LSOH
241218 / DK-1531-VH-5
500m, Installation cable (AWG 24/1), LSOH
241171 / DK-1531-P-1
100m, Patch cable (AWG 26/7)
241195 / DK-1531-P-305
305m, Patch cable (AWG 26/7)

Enjoy connections. Live.

DIGITUS® CAT 7 1000 MHz S-FTP twisted pair cable

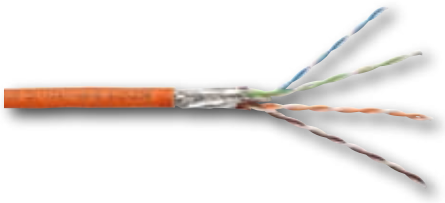

- Bare copper wire 4 x 2 x AWG 23/1
- Aluminium laminated plastic composite foil
- Tinned copper braid (about 35% coverage)
- Halogenfree protective sheath FRNC B, orange color
- According to EIA/ TIA 568B.2.1, Cenelec EN 50173, ISO/IEC 11801

247449 / DK-1741-VH-1
100m with halogenfree outer jacket
241324 / DK-1741-VH-5
500m drum, simplex, halogenfree outer jacket
247289 / DK-1741-VH-D-5
500m drum, duplex, halogenfree outer jacket

DIGITUS® CAT 5e wall outlets

- Category 5e, EIA TIA 568 and ISO IEC 11801 / EN 50173
- For up to 100 MHz
- Shielded 2 x RJ45 sockets, 8P8C, strain relieving 40° socket angle
- Integrated installation cable strain relief
- Shielding from enclosed metal die cast housing
- Flush / surface mount ready
- Cable installation via LSA strips, color codes based on EIA/TIA 568 A & B

175650 / DN-9001-N
Flush Mount, 2 x RJ 45, white color RAL 9010

175704 / DN-9001/B5-N
Flush Mount, 2 x RJ 45, white color RAL 9010, 5 pcs.

175681 / DN-9002-N
Surface mount, 2 x RJ 45, CAT 5e, white color RAL 9010

175698 / DN-9002/B5-N
Surface Mount, 2 x RJ 45, white color RAL 9010, 5 pcs.

DIGITUS® CAT 6 wall outlets

- Category 6 according to link performance EIA TIA 568, ISO IEC 11801 Class E, EN 50173
- For up to 250 MHz
- 3P channel and permanent link certified
- Shielded 2 x RJ45 sockets, 8P8C, strain relieving 40°socket angle
- Integrated installation cable strain relief
- Enclosed metal die cast housing
- Flush / surface mount ready
- Cable installation via LSA strips, color codes based on EIA/TIA 568 A & B
- Horizontal cable entry

175711 / DN-9005-N
Flush Mount, 2 x RJ 45, white color RAL 9010

175759 / DN-9005/B5-N
Flush Mount, 2 x RJ 45, white color RAL 9010, 5 pcs.

175735 / DN-9006-N
Surface Mount, 2 x RJ 45, white color RAL 9010

175742 / DN-9006/B5-N
Surface Mount, 2 x RJ 45, white color RAL 9010, 5 pcs.

DIGITUS® CAT 6 De Embedded wall outlets, design compatible

- Category 6, according to Link Performance Class E
- De Embedded certified
- For up to 250 MHz
- Design compatible with common switch programmes
- Shielded 2 x RJ45 sockets, 8P8C, strain relieving 40°socket angle with dust cover
- Integrated installation cable strain relief
- Shielded RJ45 sockets due to enclosed metal die cast housing
- Flush / surface mount ready
- Cable installation via LSA strips, color codes based on EIA/TIA 568 A & B
- Horizontal cable entry

241409 / DN-9005-KL-N
Flush mount, 2 x RJ 45, white color RAL 9010

241416 / DN-9006-KL-N
Surface mount, 2 x RJ 45, white color RAL 9010

DIGITUS® 19" CAT 5e patch panels

- Category 5e,EN-50173, ISO/IEC 11801
- RJ45 sockets, 8P8C
- Cable installation LSA block, color-coded according to EIA7TIA 568 A & B

241454 / DN-91516U
16 port, 1U, unshielded

241515 / DN-91516S
16 port, 1U, shielded

241461 / DN-91524U
24 port, 1U, unshielded

241522 / DN-91524S
24 port, 1U, shielded

241478 / DN-91548U
48 port, 2U, unshielded

DIGITUS® 10" CAT 5e patch panels

- Manufactured at Category 5e, EIA/TIA 568 and ISO/IEC DIS 11801
- RJ45 sockets
- 8 x LSA color-coded connection strip
- 1U
- Clamp strain relief
- Central ground
- Cable fixture

241430 / DN-91508U
8 port, unshielded

241485 / DN-91508S
8 port, shielded

108931 / DN-10001
8 port, desktop version

241447 / DN-91512U
12 port, unshielded

241508 / DN-91512S
12 port, shielded

DIGITUS® CAT 6 STP patch panels

- Tested according to Link Performance Class E, for up to 250 MHz
- UL certified
- Housing of steel sheet
- Shielded RJ45 female sockets, 8P8C
- 1U
- Cable installation via LSA strips, colour-coded as per EIA/TIA 568B
- Fixing option for cable ties, central ground connection

241577 / DN-91608S
8 port, shielded, 10" mount

241584 / DN-91608SD
8 port, shielded, Desktop version

241591 / DN-91612S
12 port, shielded, 10" mount

241546 / DN-91616U
16 port, unshielded, 19" mount

241607 / DN-91616S
16 port, shielded, 19" mount

241553 / DN-91624U
24 port, unshielded, 19" mount

241614 / DN-91624S
24 port, shielded, 19" mount

DIGITUS® 19" network cabinets

The DIGITUS® network cabinets are made of a robust steel construction with a minimum of seams. The cabinet can be taken apart for easy entry in small rooms. Ideal housing for active and passive 19" components. The elegant design fits into every modern office or computer centre. The shipment is always with mounted cabinets.

Standard Type:

- 1.5mm - 2mm strong sheet steel with high load capacity
- Painted, light grey (RAL 7035)
- Side sections detachable and lockable
- Ventilation slots for passive ventilation and exhaustion
- Protection class IP 40
- Framed safety glass door, opening angle 180° with lockable swing handle, optionally available as a double-wing door
- Lockable steel rear door
- Spring-mounted hinges enable easy installation of the door or door change
- Up to 600kg load-bearing capacity
- 19" profile rails on the front and rear sides
- Large cable entry with rubber-edged sliding mechanism on the floor, as protection against cable breakage and damage, and ensures the fixation of large bundles of cable
- Cable feeds with brush strips
- Completely earthed
- Height-adjustable levelling feet for the equalisation of uneven floors
- Roof module for ventilation unit
- Lateral cable routing panel for DN-19 32U-8/8 and DN-19 42U-8/8
- Incl. set of 28× 9" assembly screws

DN 19 42U-8/8 incl. DN 19 Plinth-8/8

Sophisticated cable management through separated cable guide for data and power cables into the levels (optional available).

Horizontal cable ducts allow optimum shunt possibility for patch cables. Standard mounted on all network cabinets with 800mm width.

Universal cable entry on the bottom.

135050 / DN-19 22U-6/6
22U, 1132x600x600mm (HxWxD)

135678 / DN-19 26U-6/6
26U, 1310x600x600mm (HxWxD)

135685 / DN-19 26U-6/8
26U, 1310x600x800mm (HxWxD)

135142 / DN-19 32U-6/6
32U, 1577x600x600mm (HxWxD)

147114 / DN-19 32U-6/8
32U, 1577x600x800mm (HxWxD)

148241 / DN-19 32U-8/8
32U, 1577x800x800mm (HxWxD)

135159 / DN-19 42U-6/6
42U, 2022x600x600mm (HxWxD)

135166 / DN-19 42U-6/8
42U, 2022x600x800mm (HxWxD)

135173 / DN-19 42U-8/8
42U, 2022x800x800mm (HxWxD)

DIGITUS® 19“ wall mounting cabinets

Standard type:
- 1,1mm – 1,5mm strong sheet steel with high load capacity
- Color grey RAL 7035
- Side sections detachable and lockable
- Ventilationslots for passive ventilation and exhaustion
- Protection rating IP 40
- Safety-glass door with steel frame and lockable
- 2 x 19“ profile rails
- Cable entry on top and bottom
- Incl. 8 pieces mounting set
- Grounded
- Extensive accessories available

135203 / DN-19 07-U 7U, 402x600x450mm (HxWxD)	**190103 / DN-19 07-U-6/6** 7U, 402x600x560mm (HxWxD)
135210 / DN-19 09-U 9U, 491x600x450mm (HxWxD)	**157519 / DN-19 09-U-6/6** 9U, 491x600x560mm (HxWxD)
135227 / DN-19 12-U 12U, 624x600x450mm (HxWxD)	**180517 / DN-19 12-U-6/6** 12U, 624x600x560mm (HxWxD)
135234 / DN-19 16-U 16U, 802x600x450mm (HxWxD)	**174097 / DN-19 16-U-6/6** 16U, 802x600x560mm (HxWxD)
205968 / DN-19 20-U 20U, 980x600x450mm (HxWxD)	**205975 / DN-19 20-U-6/6** 20U, 980x600x560mm (HxWxD)

DIGITUS® Double section 19“ wall mounting cabinets

Standard Type:
- 1,1mm – 1,5mm strong sheet steel with high load capacity
- Color grey RAL 7035
- Side sections detachable and lockable
- Ventilationslots for passive ventilation and exhaustion
- Double section, lockable
- Protection rating IP 40
- Safety-glass door with steel frame and lockable
- 2 x 19“ profiles
- Cable entry on top and bottom
- Incl. 8 pieces mounting set
- Grounded
- Extensive accessories available

186724 / DN-19 07-U-3 7U, Double section, 402x600x610mm (HxWxD)
186731 / DN-19 09-U-3 9U, Double section, 491x600x610mm (HxWxD)
186748 / DN-19 12-U-3 12U, Double section, 624x600x610mm (HxWxD)
186755 / DN-19 16-U-3 16U, Double section, 802x600x610mm (HxWxD)

DIGITUS® SoHo 19“ wall mounting cabinets, unmounted

Standard Type:
- 1,1mm – 1,5mm strong sheet steel with high load capacity
- Color grey RAL 7035
- Ventilation slots for active and passive ventilation
- Safety-glass door with steel frame and lockable
- 2 x 19“ profiles
- Cable entry on top and bottom
- Incl. 1 piece brush for cable entry
- Load capacity 20 kg
- Top-floor module for Fan unit
- Incl. 8 pieces mounting set
- Extensive accessories available

135241 / DN-19 07-U-S 7U, 360x520x400mm (HxWxD)
135258 / DN-19 09-U-S 9U, 448x520x400mm (HxWxD)
135432 / DN-19 12-U-S 12U, 582x520x400mm (HxWxD)

Please find further Network Products in the DIGITUS® Network Catalog, or just visit www.DIGITUS®.info

DIGITUS® SoHo slim wall mount cabinet

Standard type:
- Strong sheet steel with high load capacity
- Color anthracitegrey RAL 7016
- Ventilationslots for passive ventilation and exhaustion
- Protection rating IP 20
- 5U 19" device mounting capacity (2 vertical + 3 horizontal)
- Safety-glass door with steel frame and lockable
- Mechanical distance holder
- Heavy duty hinges
- Load carrying capacity: 80kg
- 497x140x475mm

200109 / DN-19 04U-PB
5U, 497x140x475mm

DIGITUS® SoHo PC cabinets

DIGITUS® SoHo PC cabinets offer an excellent solution for workshops, factories, processes, warehouses and laboratories.

Standard Type:
- Sturdy and rugged steel contruction
- Color grey RAL 7035
- Side sections detachable and lockable
- Ventilation slots for passive ventilation and exhaustion for DN-CC 9001
- Framed and lockable safety glass front & steel door
- Suitable to use under table constructions
- Professional cable management, hiding and protecting the cables
- Delivered with castor group
- 650x300x600mm

211136 / DN-CC 9001
IP 20 with passive ventilation

211143 / DN-CC 9002
IP 54 with active ventilation

DIGITUS® 19" wall mounting patch brackets

- High quality, cost effective and cost economical solution
- Adjustable in depth
- Hinged, rotable
- Housing for 19" patch panels telephone distribution systems
- Color black RAL 9005
- Delivered in flatpackage

205982 / DN-19 PB-2U
2U, 485x350mm

205999 / DN-19 PB-4U
4U, 485x350mm

206002 / DN-19 PB-8U
8U, 485x350mm

DIGITUS® Line Interactive uninterruptible power systems

- Microprocessor controlled Line Interactive Technology
- Boost and buck automatic voltage regulation (AVR)
- Advanced battery management (ABM)
- Short circuit and overload protection
- Lightning and surge protection
- Fault status LEDs
- Cold start & energy saving features
- Communication port and remote monitoring software
- Telephone / modem internet surge protection
- Input Voltage: 230V or 220V ± 25%
- Output Voltage: simulated sinewave 220V ± 10%
- Frequency: 50 or 60 Hz ± 1%
- Communication: RS232 port
- Back up time: 5 - 30 minutes (depending on computer load)

208273 / DN-170010
600VA, 7kg, 96x172x355mm

208280 / DN-170011
1000VA, 14.2 kg, 144x235x361mm

208334 / DN-170012
1500VA, 17.5 kg, 144x235x361mm

DIGITUS® Line Interactive uninterruptible power systems with LCD

- Microprocessor controlled Line Interactive technology
- Boost and buck automatic voltage regulation (AVR)
- Intelligent battery management system
- LCD display panel
- Input & output voltage display on the LCD panel
- Over/under voltage, lightning, surge protections
- Short circuit, overload, over discharge protections
- Battery, load, operation status indicators
- Cold start & energy saving features
- Communication port RS 232
- Tel/fax/modem protection
- Availability to use without batteries as AVR
- Compact size and user friendly operation
- Input Voltage: 230V or 220V ± 25%
- Output Voltage: Simulated Sinewave 230V or 220V ± 10%
- Frequency: 50 or 60 Hz ± 1%
- Back up time: 5 - 30 minutes (depending on computer load)

208341 / DN-170020
650VA, 7kg, 96x172x355mm

208358 / DN-170021
1000VA, 14.2kg, 148x235x361mm

208365 / DN-170022
1500VA, 17.5kg, 144x235x361mm

DIGITUS® Network- and communication cable tester, RJ45 and BNC

- Test function for cables with RJ45, RJ12, RJ11 and BNC male
- Auto-scan and step by step testing
- Loop-back: for testing and localising of already laid network or communication cables
- Continuity: for continuity testing of network or communication cables
- Open: for localising of disconnected single wires
- Shorts: locating of short-circuited single wires
- Miss-wire: identification of non-conform wire assignment
- Pin to pin configuration: 1 assignment testing
- Main device with 2 x RJ45 female, remote unit with 1 x RJ45 female
- Various LEDs for status display, operates with 9 Volt block battery
- Includes two-language manual and modular BNC adapter

126454 / DN-14001
Cable tester, RJ-45 and BNC

DIGITUS® HDMI splitter

With the DIGITUS® HDMI splitter you can supply several HDMI displays from only one HDMI device.

- 1 input, 2-8 outputs
- easy to install and simple to operate
- compatible with HDTV 480i, 480p, 720i, 720p, 1080i and 1080p
- supports VGA, SVGA, XGA and UXGA
- HDMI 1.3b and HDCP compatible
- operation pixel frequency range: 25-165MHz

233053 / DC-41303
HDMI splitter, 2-port

233060 / DC-42303
HDMI splitter, 4-port

233077 / DC-43303
HDMI splitter, 8-port

DIGITUS® HDMI switches

With the DIGITUS® HDMI switch you can supply one HDMI display from several HDMI devices.
You can switch between the HDMI devices manually or with the enclosed remote control.

- 3 or 5 inputs, 1 output
- easy to install and simple to operate
- Plug & Play - No software required
- HDCP compliant
- compatible with HDTV 480i, 480p, 720i, 720p, 1080i and 1080p
- supports VGA, SVGA, XGA and UXGA
- HDMI interface is compliant with HDMI 1.3b specification
- Supports for 8bit,and 12bit deep color per channel
- incl. remote control
- incl. power adapter 5V 1A

233084 / DC-41304
HDMI switch, 3-port

233091 / DC-42304
HDMI switch, 5-port

DIGITUS® Video/Audio Matrix

Through the video/audio matrix DC-48101, you can display / play different images / audio signals to 4 screens / speakers (or earphones) through 4 PC. And you can also control the source of image / audio by selecting PC signal source 1 ~ 4 or turning off source input.
Video/Audio matrix is ideal for ,test bench facilities, data center, help desks, video broadcasting, presentation, stock quotes, timetables, educational facilities, etc.

Features:

- Intelligent functionality
- Can be cascaded
- With 350MHz pixel frequency, supports the DDC, DDC2, DDC2B
- Support VGA, SVGA, UXGA, QXGA resolutions
- Support Multi-Sync video type include RGBHV, RGsB, RGBS
- Support synchronous Include positive, negative; TTL or 1Vpp level
- Four sets of 7-Segment LED can indicate the input setting status of input port quickly
- The output is compatible with standard VGA card
- Extends the video signal up to 65 meter (213 feet)
- The switches on panel can select PC signal source 1 ~ 4 as OUT 1 ~ 4 or turning off any signal I/O port / all I/O ports

233350 / DC-48101
Matrix switch 4x4

DIGITUS® VGA extender over CAT5

Through the VGA Extender, you can use one PC to display identical image and extension of VGA signal up to 180m on monitor.

- VGA extension over Cat5 cable
- Distance up to 180m between PC and monitor
- Video resolution up to 12801x1024 pixel at 60Hz
- VGA extension over Cat5 cable
- Connection of one remote display
- Connection of one local display (only DC-53401)
- Equalization length is adjustable
- VGA signal gain is adjustable

223894 / DC-53101
VGA extender, single port

223900 / DC-53401
VGA extender, local and remote port

DIGITUS® VGA extender / splitter over CAT5

Through the VGA Extender, you can use one PC to display indentical image and extension of VGA signal up to 180m on monitors

- VGA extension over Cat5 cable
- Distance up to 180m between PC and monitor
- Video resolution up to 1280x1024 pixel at 60Hz
- Possibility to conect one local monitor
- Connection of up to eight remote displays over remote units (not in scope of delivery)
- Equalization length is adjustable
- VGA signal gain is adjustable

223917 / DC-53501
VGA extender, 2-port

223924 / DC-53601
VGA extender, 4-port

223931 / DC-53701
VGA extender, 8-port

223948 / DC-59301
Remoteunit for video-extender

DIGITUS® VGA matrix 250MHz

- 2 switchable inputs (PC) , up to 16 outputs (Monitor)
- Built-in line amplifier, up to 65m
- Maximum resolution 1920x1440 pixels at 60Hz
- Video bandwidth 250MHz
- DDC, DDC2, DDC2B support
- Cascadable

146070 / DC VX-8202
VGA matrix 250MHz, 2 inputs, 2 outputs

146087 / DC VX-8204
VGA matrix 250MHz, 2 inputs, 4 outputs

146094 / DC VX-8208
VGA matrix 250MHz, 2 inputs, 8 outputs

146117 / DC VX-8216
VGA matrix 250MHz, 2 inputs, 16 outputs

DIGITUS® VGA selector 250MHz

- Ideal for school class, workshops, training rooms etc.
- 2-8 inputs (PC), 1 output (Monitor, Beamer etc.)
- Maximum resolution 1920x1440 pixels at 60Hz
- Video bandwidth 250MHz
- DDC, DDC2, DDC2B support
- OSD and remote control for easy PC selection (only DC VRM818)

151401 / DC VRM812E
VGA selector 250MHz, 2 inputs, 1 output

151418 / DC VRM814E
VGA selector 250MHz, 4 inputs, 1 output

151425 / DC VRM818
VGA selector 250MHz, 8 inputs, 1 output

DIGITUS® VGA splitter 400MHz

- Video bandwidth 400MHz
- Maximum resolution 2048x1536 pixels at 60Hz
- Built-in line amplifier, up to 65m
- DDC, DDC2, DDC2B support
- Cascadable (max. 64)
- Metal housing for better EMI shielding
- Video IN/OUT: HDSUB15/Female

130086 / DC VS812PF
VGA splitter 400MHz, 2-port

130093 / DC VS814PF
VGA splitter 400MHz, 4-port

130109 / DC VS818PF
VGA splitter 400MHz, 8-port

130079 / DC VS8116PF
VGA splitter 400MHz, 16-port

DIGITUS® VGA splitter 250MHz

- Video bandwidth 250MHz
- Maximum resolution 1920x1440 pixels at 60Hz
- Built-in line amplifier, up to 65m
- DDC, DDC2, DDC2B support
- Cascadable (max. 64)
- Metal housing for better EMI shielding
- Video IN: HDSUB15/Male
- Video OUT: HDSUB15/Female

113973 / DC VS812
VGA splitter 250MHz, 2-port

113980 / DC VS814
VGA splitter 250Mhz, 4-port

113997 / DC VS818
VGA splitter 250MHz, 8-port

117735 / DC VS8116
VGA splitter 250MHz, 16-port

DIGITUS® pocket VGA splitter 300MHz

Through the DC KVS-12, DC KVS-14 video splitter, you can use one pc to display identical image on 2, 4 monitors or even more.

- With 300Mhz pixel frequenzy
- Extends the video signal up to 65m
- Supports DDC, DDC2, DDC2B
- Can be cascaded
- Compatible with standard VGA card
- Max. Resolution 2048x1536 pixels at 60Hz
- Signal: VGA, SVGA, XGA, QXGA, UXGA Multisync
- Incl. power adapter DC 9V 600mA
- Dimension: 100 x 81,5 x 27,5mm

195092 / DC KVS-12
VGA splitter 300MHz, 2-port

195108 / DC KVS-14
VGA splitter 300MHz, 2-port

DIGITUS® VGA booster, 65m

- VGA line amplifier, up to 65m
- Maximum resolution 1920x1440 pixels at 60Hz
- Video bandwidth 250MHz, DDC, DDC2, DDC2B support
- DDC, DDCB, DDC2B support
- Cascadable
- Video IN: HDSUB15/Male
- Video OUT: HDSUB15/Female
- incl. Power adapter

149125 / DC VS811
VGA booster, 65m

DIGITUS® DVI selector

- 2 or 4 inputs (PC), 1 output (Monitor, Beamer etc.)
- Ideal for school class, workshops, training rooms etc.
- Combines Analog and Digital Video Signal output
- Maximum resolution 1280x1024 pixels
- Supports DDC2B at analog Video output
- Input: DVI-I Female
- Outputs: DVI-I Female

159087 / DC DRM-812F
DVI selector, 2 inputs, 1 output

159094 / DC DRM-814F
DVI selector, 4 inputs, 1 output

DIGITUS® DVI splitter

- Maximum resolution 1600x1200 pixels at 60Hz
- By Panel Link Digital Technik highest Video resolution, up to UXGA
- UXGA 25 - 165MHz
- Input: DVI-I Female
- Outputs: DVI-I Female
- Cable lenght between Monitor and Splitter up to 10m

149156 / DC DS-812F
DVI splitter, 2-port

149415 / DC DS-814F
DVI splitter, 4-port

177944 / DC DS-818F
DVI splitter, 8-port

DIGITUS® USB pocket KVM switch, 2-Port

- Control two PCs with one USB keyboard, one USB mouse and one monitor
- Simple installation - no additional software required
- PC selection via hotkey
- Excellent video quality - up to 2048x1536 pixels at 85Hz
- Support DDC, DDC2, DDC2B, DDC2AB
- Audio IN/OUT - support
- Hot Plug and Play
- Keyboard and mouse emulation for faultless booting of the computer
- Autoscan- (5 to 60sec.)
- No external power supply required
- Integrated KVM cable for connection of two PCs 1.2m
- Supports Windows® 95/98/98SE/ME/NT4.0/2000/2003 Server/XP/VISTA, Linux and Mac

206064 / DC-11402
USB pocket KVM switch, 2-Port

DIGITUS® USB pocket KVM switch for DVI, 2-port

- Controls two PCs with one USB keyboard, one USB mouse and one DVI monitor
- Full DVI-D support
- Simple Installation – no additional software required
- PC selection via hotkey or push-button
- Excellent video quality – up to 1920x1080 pixel at 60Hz
- Supports DDC, DDC2 monitors
- Supports independent audio switching
- Hot Plug and Play and Hot-Swap function
- Keyboard and mouse emulation for faultless booting of the computer
- Autoscan function (5-60sec.)
- No external power supply required
- Integrated KVM cable for connection of two PCs, length 1,2m
- Support Window 98SE/ME/2000/XP/Vista/2003 server, Mac , Linux

233336 / DC-11802
USB pocket KVM switch for DVI, 2-port

DIGITUS® pocket KVM switches, PS/2

- Controls two PCs with one PS/2 keyboard, one PS/2 mouse and one monitor
- Simple installation - no additional software required
- PC selection via hotkey
- Excellent video quality - up to 1920x1440 pixels, 200MHz bandwidth
- Supports DDC, DDC2, DDC2B, DDC2AB
- Hot plug and play
- Keyboard and mouse emulation for faultless booting of the computer
- Autoscan (5,10,15,20,25,30sec. options) / autoskip function
- No external power supply required
- Integrated KVM cable for connection of two PCs 1.2m
- Supports standard PS/2 mouse, Microsoft IntelliMouse and full support for Microsoft IntelliPoint 5.0 mouse driver and Logitech Mouse Ware driver
- Supports Windows® 95/98/98SE/ME/NT4.0/2000/XP/VISTA, DOS, Linux, Novell Netware, FreeBSD

159056 / DC OC12
Pocket KVM switch PS/2, 2-port

159063 / DC OC12A
Pocket KVM switch PS/2 with audio, 2-port

174325 / DC OC12U
Pocket KVM switch PS/2, 2-port for USB PC

DIGITUS® compact KVM switches, PS/2

- Controls multiple PCs with one PS/2 keyboard, one PS/2 mouse and one monitor
- Simple installation - no additional software required
- PC selection via push-button or hotkey
- Excellent video quality - up to 1920x1440 pixels, 200MHz bandwidth
- Supports DDC, DDC2, DDC2B, DDC2AB
- Hot Plug and Play
- Keyboard and mouse emulation for faultless booting of the computer
- Autoscan (5,10,15,20,25,30sec. options) / autoskip function
- No external power supply required
- Incl. 2 sets of connector cables
- Supports standard PS/2 mouse, Microsoft IntelliMouse and full supportfor the Microsoft IntelliPoint 5.0 mouse driver & Logitech Mouse Ware driver
- Supports Windows® 95/98/98SE/ME/NT4.0/2000/XP/VISTA, DOS, Linux, Novell Netware, FreeBSD

117766 / DC IC612I
KVM switch PS/2, 2-port

117773 / DC IC614I
KVM switch PS/2, 4-port

DIGITUS® audio combo KVM switch - DVI, 3-port

- Controls up to three PCs with one PS/2- or USB-keyboard, one PS/2- or USB-mouse and one DVI-monitor, incl. audio-suply
- Simple installation - no additional software needed
- PC-choice over push-buttons or Hot-Key
- Excellent video quality - up to 1600x1200 pixels at 60Hz
- Supports DDC, DDC2 DVI UXGA
- Hot Plug and Play
- Emulates a keyboard on each PC to allow your computers to boot normally without a keyboard error
- Autoscan (5 - 250sec.)
- No external power suply unit needed, self powered through USB connection (optional Power supply 5V; 2,0A - Art.-Nr. DN-R-PS-1)
- Fully compliant with the USB 1.1/ 2.0 specification
- Delivery incl. two cable sets with 1,8m lenght
- Supports Windows® 95/98/98SE/ME/NT4.0/2000/2003 Server/XP/ VISTA, Linux, Mac and Sun Micro Systems

222620 / DC-11801-1
Audio combo KVM switch DVI, 3-port

KVM cable for DIGITUS® USB-KVM switches with audio (Combo-series)

AK 82201

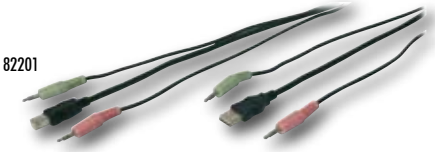

- 2x3,5mm/M; USB A/M <=> 2x3,5mm/M; USB B/M
- Color: black
- For: DC-11801-1

AK 621N

DVI-D (24+1) plug <=> DVI-D (24+1) plug
- molded housing
- cable full connected, double shielded, AWG28
- 2x ferrite filter
- UL20276
- colour: black

201212 / AK 82201
1.8m

201229 / AK 82202
3.0m

201236 / AK 82203
5.0m

120872 / AK 621N
2.0m Dual-Link

126157 / AK 621N-3
3.0m Dual-Link

126164 / AK 621N-5
5.0m Dual-Link

DIGITUS® USB-KVM switches with audio

- Controls several PCs with one USB keyboard, USB mouse and monitor respectively
- Supports speaker & microphone
- Easy to install--No software required
- PC selection via buttons, hot keys or mouse click (hot key function can be switched off)
- Excellent video quality - Up to 1920x1440 pixels,200MHz bandwidth
- supports DDC, DDC2, DDC2B, DDC2AB
- Hot Pluggable
- Supports Windows®, Linux and Macintosh

223863 / DC-11403
USB-KVM switch with audio and mouseclicking, 2-port

223870 / DC-12402
USB-KVM switch with audio and mouseclicking, 4-port

DIGITUS® USB 2.0-KVM switch, 2-port

- Controls two PCs with one keyboard, mouse and monitor
- Universal use with USB and PS/2 devices
- Integrated 3-Port USB 2.0 Hub
- Easy installation - no additional software needed
- PC selection by push-button, Hot-Key or OSD-Utility
- Excellent video quality - up to 1920x1440 pixels
- Supports DDC, DDC2
- Hot Plug and Play
- Emulates a keyboard on each PC to allow your computers to boot normally without a keyboard error
- Autoscan- (5 bis 250sec.)
- Delivery incl. two cable sets with 1,8m lenght
- Supports Windows® 98SE/ME/NT4.0/2000/2003 Server/XP/VISTA, Linux, Mac and Sun Micro Systems

222583 / DC-11201-1
USB 2.0-KVM switch, 2-port

KVM cable for DIGITUS® USB-KVM switches (Combo-series)

- HDDB15/M, 1 x USB-A/M <=> HDDB15/F, 1 x USB-B/M
- Color: black
- For: DC-11201, DC-11201-1, DC-12201, DC-12201-1, DC-11403, DC-12402

201243 / AK 82301
1.8m

201250 / AK 82302
3.0m

201267 / AK 82303
5.0m

DIGITUS® USB 2.0-KVM switch, 4-port

- Controls up to four PCs with one keyboard, mouse and monitor
- Universal use with USB and PS/2 devices
- Integrated 3-Port USB 2.0 Hub
- Easy installation - no additional software needed
- PC selection by push-button, Hot-Key or OSD-Utility
- Excellent video quality - up to 1920x1440 pixels
- Supports DDC, DDC2
- Hot Plug and Play
- Emulates a keyboard on each PC to allow your computers to boot normally without a keyboard error
- Autoscan- (5 bis 250sec.)
- Incl. external Power DC 5V 2A
- Delivery incl. two cable sets with 1,8m length
- Supports Windows® 98SE/ME/NT4.0/2000/2003 Server/XP/VISTA, Linux, Mac and Sun Micro Systems

222590 / DC-12201-1
USB 2.0-KVM switch, 4-port

DIGITUS® USB-PS/2 Combo-KVM switches

- Controls several PCs with one PS/2- or USB-keyboard, one PS/2- or USB-mouse and one monitor
- Simple installation - no additional software needed
- PC-choice over push-buttons or Hot-Key
- Excellent video quality - up to 2048x1536 pixels at 85Hz
- Supports DDC, DDC2
- Hot Plug and Play
- Emulates a keyboard on each PC to allow your computers to boot normally without a keyboard error
- Autoscan (5 to 250sec.)
- No external power supply needed, self powered through PS/2 and/or USB connection (optional Power supply 5V; 2,0A - Art.-Nr. DN-R-PS-1)
- Fully compliant with the USB 1.1/ 2.0 specification
- Delivery incl. two cable sets with 1,8m lenght
- Supports Windows® 95/98/98SE/ME/NT4.0/2000/2003 Server/XP/VISTA, Linux, Mac and Sun Micro Systems

222637 / DC-11202-1
USB-PS/2 Combo-KVM switch, 2-port

222644 / DC-12202-1
USB-PS/2 Combo-KVM switch, 4-port

DIGITUS® Audio USB-PS/2 Combo-KVM switches

- Controls two PCs with one PS/2- or USB-keyboard, one PS/2- or USB-mouse and one monitor, incl. audio-support
- Simple installation - no additional software needed
- PC-choice over push-buttons or Hot-Key
- Excellent video quality - up to 2048x1536 pixels at 85Hz
- Supports DDC, DDC2
- Hot Plug and Play
- Emulates a keyboard on each PC to allow your computers to boot normally without a keyboard error
- Autoscan (5 to 250sec.)
- No external power supply needed, self powered through PS/2 connection or USB connection (optional Power supply 5V; 2,0A - Art.-Nr. DN-R-PS-1)
- Fully compliant with the USB 1.1/2.0 specification
- Delivery incl. two cable sets with 1,8m lenght
- Supports Windows® 95/98/98SE/ME/NT4.0/2000/2003 Server/XP/VISTA, Linux, Mac and Sun Micro Systems

222651 / DC-11401-1
Audio USB-PS/2 Combo-KVM switch, 2-port

222668 / DC-12401-1
Audio USB-PS/2 Combo-KVM switch, 4-port

KVM cable for DIGITUS® KVM switches (Combo-series)

- HDDB15/M <=> HDDB15/M, 2x MiniDIN6/M, 1x USB-A/M
- color: black
- For: DC-11101, DC-11202, DC-11202 -1, DC-11301, DC-11401, DC-11401-1, DC-12101, DC-12202, DC-12202-1, DC-12301, DC-12401, DC-12401 -1, DC-13101, DC-13201, DC-14101, DC-14201

201151 / AK 82001
1.8m

201168 / AK 82002
3.0m

201175 / AK 82003
5.0m

223788 / AK 82004
long cable only PS/2, 10m

223795 / AK 82304
long cable only USB, 10m

KVM cable for DIGITUS® KVM switches with audio (Combo-series)

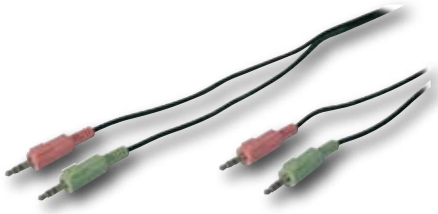

- 2x3,5mm stereo M <=> 2x3,5mm stereo M
- Color: black
- For: DC-11301, DC-11401, DC-11401-1, DC-12301, DC-12401, DC-11403, DC-12402, DC-12401 -1

201182 / AK 82101
1.8m

201199 / AK 82102
3.0m

201205 / AK 82103
5.0m

DIGITUS® USB-PS/2 Combo-KVM switch with OSD

- Controls up to sixteen PCs with one PS/2- or USB-keyboard, one PS/2- or USB-mouse and one monitor
- Simple installation - no additional software needed
- PC-choice over push-buttons, Hot-Key or OSD (On Screen Display)
- Excellent video quality - up to 2048x1536 pixels at 85Hz
- Supports DDC, DDC2
- Hot Plug and Play
- Emulates a keyboard on each PC to allow your computers to boot normally without a keyboard error
- Autoscan (5 to 250sec.)
- incl. external power supply unit DC 5V 2A
- incl. 19"-Rack mounted iron panel with screw (DC-15002 => also separately available)
- Fully compliant with the USB 1.1/ 2.0 specification
- Supports Windows® 95/98/98SE/ME/NT4.0/2000/2003 Server/XP/VISTA, Linux, Mac and Sun Micro Systems

201021 / DC-13201
19" USB-PS/2 Combo-KVM switch with OSD, 8-port

201038 / DC-14201
19" USB-PS/2 Combo-KVM switch with OSD, 16-Port

DIGITUS® KVM extender over CAT5

The extension of VGA, PS/2 keyboard, PS/2 mouse signal up to 300 meter away by using the KVM Extender and one CAT5 cable.

- Max.resolution 1280x1024 pixel
- Support Auto/Manual video quality adjustment.
- Support video gain, equalization and RGB skew adjust.
- Support 3 hot key to combine other equipment.
- Two control privilege modes – „Share" & „Local only".
- Extra console port is available on Local side.
- Auto console selection between Local and Remote.

223825 / DC-51101
KVM extender 300m, local + remote

232711 / DC-51102
KVM extender 180m, local + remote

DIGITUS® RS232 extender, 1000m

- Compatible with all RS232 protocols.
- Full-duplex data communication.
- Sends RS232 data at 230kbps up to 1000m (3300ft.)
- Pure hardware solution - real time data transfer, no software conflicts.
- Transfer data or files between PCs, equipments.
- Extension over CAT5 cable

223887 / DC-52101
RS232 extender

DIGITUS® Desktop KVM switches, PS/2

- Controls several PCs via a PS/2 keyboard, a PS/2 mouse and a monitor
- Easy installation - no additional software required
- PC selection via buttons, hot keys or mouse click (hot key function can be switched off)
- Excellent video quality - up to 1920x1440 pixels, 200MHz bandwidth
- Supports DDC, DDC2, DDC2B, DDC2AB
- Hot plug and play
- Keyboard and mouse emulation for error free booting of the computer
- Autoscan (5,10,15,20,25,30sec. options) / autoskip function
- No external power supply required (optional power supply 9V DC, 300mA - Art.-Nr. DC ICPS)
- Supports Standard-PS/2-Maus, Microsoft IntelliMouse plus complete support for MicrosoftIntelliPoint 5.0 mouse drivers & Logitech MouseWare drivers
- Supports Windows® 95/98/98SE/ME/NT4.0/2000/XP/VISTA, DOS, Linux, FreeBSD

167143 / DC IC812I-MC
KVM switch PS/2 with mouseclicking, 2-port

167150 / DC IC814I-MC
KVM switch PS/2 with mouseclicking, 4-port

167167 / DC IC816I-MC
KVM switch PS/2 with mouseclicking, 6-port

167174 / DC IC818I-MC
KVM switch PS/2 with mouseclicking, 8-port

DIGITUS® KVM cable for KVM switches (DC IC-series)

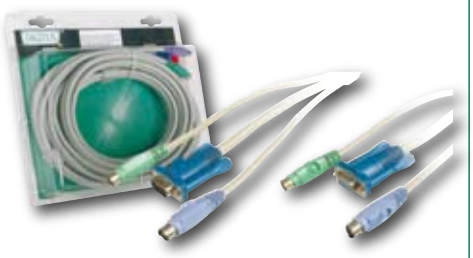

- 2x MiniDIN6 (PS/2) M <-> 2x MiniDIN6 (PS/2) M
- 1x HD D-Sub15 M <-> 1x HD D-Sub15 F
- color: beige
- connectors color coded: keyboard (violet), mouse (green), monitor (blue)
- For: DC IC61xI; DC IC81xI-MC; DC IC81xIA-MC; DC IC818I-OSD-MC, etc.
- In blisterpackage

093909 / DB-050995
1.8m

093916 / DB-051039
3.0m

DIGITUS® KVM switch cable with PS/2 to USB converter

- Built-in PS/2 to USB converter
- Cable length: 3m
- Requires no external power supply
- Compatible with USB 1.1/2.0 specification
- Supports UHCI, OHCI, & EHCI USB controller
- For PS/2 KVM switches
- Works with PC, notebooks, Macintosh, SUN Micro
- DA-70150 - for KVM switches with FEMALE monitor connection
- DA-70151 - for KVM switches with MALE monitor connection => For DIGITUS® KVMs

169789 / DA-70150
KVM cable PS/2 to USB (VGA male / male) 3,0m

169796 / DA-70151
KVM cable PS/2 to USB (VGA female / male) 3,0m

Enjoy connections. Live.

DIGITUS® KVM switches PS/2 with audio

- Controls severals PCs via a PS/2 keyboard, a PS/2 mouse and a monitor
- Easy installation - no additional software required
- PC selection via buttons, hot keys or mouse click (hot key function can be switched off)
- Clear on-screen display (OSD)
- Excellent video quality - up to 1920x1440 pixels, 200MHz bandwidth
- Supports DDC, DDC2, DDC2B, DDC2AB
- Hot plug and play
- Keyboard and mouse emulation for error free booting of the computer
- Autoscan (5,10,15,20,25,30sec. options) / autoskip function
- Power supply via mains adaptor; included
- Supports Standard-PS/2-Maus, Microsoft IntelliMouse plus complete supportfor Microsoft IntelliPoint 5.0 mouse drivers & Logitech MouseWare drivers
- Supports Windows® 95/98/98SE/ME/NT4.0/2000/XP/VISTA, DOS, Linux, Novell Netware, FreeBSD
- Audio support
- incl. 2 sets of connection cable w/audio

167204 / DC IC812IA-MC
KVM switch PS/2 with audio and mouseclicking, 2-port

167211 / DC IC814IA-MC
KVM switch PS/2 with audio and mouseclicking, 4-port

DIGITUS® desktop KVM switch PS/2, OSD, 19", 8-port

- Controls up to eight PCs via a PS/2 keyboard, a PS/2 mouse and a monitor
- Easy installation - no additional software required
- PC selection via buttons, hot keys or mouse click
- Clear on-screen display (OSD)
- Excellent video quality - up to 1920x1440 pixels, 200MHz bandwidth
- Supports DDC, DDC2, DDC2B, DDC2AB
- Hot plug and play
- Keyboard and mouse emulation for error free booting of the computer
- Autoscan (5,10,15,20,25,30sec. options) / autoskip function
- Power supply via mains adaptor; included
- Incl. 19" installation bracket 1HE
- Supports Standard-PS/2-Maus, Microsoft IntelliMouse plus complete supportfor Microsoft IntelliPoint 5.0 mouse drivers & Logitech MouseWare drivers
- Supports Windows® 95/98/98SE/ME/NT4.0/2000/XP/VISTA, DOS, Linux, FreeBSD

167181 / DC IC818I-OSD-MC
KVM switch PS/2 with mouseclicking, OSD, 8-port ,19"

DIGITUS® KVM switches DVI

- Access and controls several PC with one PS/2 keyboard, mouse and one DVI monitor
- Support standard PS/2 mouse, MS Intelli Mouse
- Fully supports MS IntelliPoint 5.0 & Logitech MouseWare drivers
- Resolution up to 1280x1024 pixels, DDC2
- Selection via Push button, Hotkey
- Easy install – no additional software required
- Hot Plug and Play
- Keyboard and mouse emulation for error free system boot
- Autoscan (5,10,15,20,25,30sec.), autoskip
- Support Windows® 95/98/98SE/ME/NT4.0/2000/XP/VISTA, DOS, Linux, Novell Netware, Free BSD

180234 / DC IC812-ID
KVM switch PS/2 DVI, 2-port

180241 / DC IC814-ID
KVM switch PS/2 DVI, 4-port

KVM cable for DIGITUS® KVM switches DVI

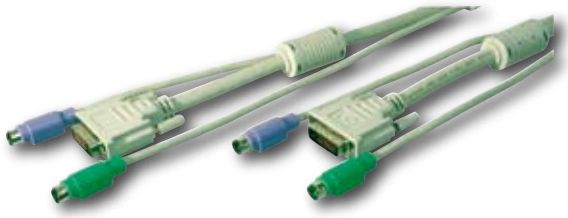

- 2x MiniDIN6 (PS/2) Stecker <-> 2x MiniDIN6 (PS/2) Stecker
- 1x DVI-D (24+1) Stecker <-> 1x DVI-D (24+1) Stecker
- Farbe: beige
- Stecker farblich codiert: Tastatur (violett), Maus (grün)
- Für: DC IC81x-ID

191759 / AK 809
1.8m

191766 / AK 809-3M
3.0m

193548 / AK 809-5M
5.0m

DIGITUS® 19" console with 15" TFT

The DIGITUS® TFT consoles are a spacesaving and functional solution for a comfortable connection to PCs, servers or KVM installations in a rack-mounting area. They combine three devices in one and occupy only 1U in a rack.

- Non reflective and break-proof 15'' LCD monitor
- Active Matrix LCD Panel
- Max. resolution: 1024x768 pixels at 75Hz, Cl. II
- VGA/SVGA/XGA/SXGA Display Mode 16.2 Mio. colors
- Contrast rate 500:1, Brightness 250cd/m², response time 12ms
- Audio Speaker support (1x 3.5mm Stereo Plug)
- Requires no additional software or hardware
- Space saving steel sheet housing (1U height), black RAL 9005
- Dimensions (WxDxH): 447x600x48mm; Weight: 12.1kg
- Package content: 1x LCD Console, 1x USER Manual, 1x Power Cord, 2x Rack-Mount Brackets; 12x Screws (for Brackets); 2x Key

Consoles also available with other keyboard layouts on request.

233534 / DC-71101GE
19" console 15" TFT, german keyboard

233558 / DC-71101US
19" console 15" TFT, US-keyboard

233541 / DC-71101FR
19" console 15" TFT, french keyboard

DIGITUS® 19" console with 15" TFT and 4-/8-/ or 16-port KVM switch

- 19" Control Panel with 15" TFT, keyboard, touchpad and built-in KVM switch
- Control up to 256 computers by cascading KVM
- PC selection via push button on front panel, hot key, mouse clicking or through OSD menue
- Monitors PC status by Auto Scan function
- Non reflective and break-proof 15'' LCD monitor
- Active Matrix LCD Panel
- Max. resolution: 1024x768 pixels at 75Hz, Cl.II, and supports EDID & DDC2 of each PC
- VGA/SVGA/XGA/SXGA Display Mode 16.2 Mio. colors
- Contrast rate 500:1, Brightness 250cd/m², response time 12ms
- Requires no additional software or hardware
- Space saving steel sheet housing (1U height), black RAL 9005
- Dimensions (WxDxH): 447x600x48mm; Weight: 12.2 / 12.25 / 12.3kg
- Package content: 1x LCD Console with integrated KVM, 1x USER Manual, 1x Power Cord, 1x Firmware Upgrade cable; 2x Rack-Mount Brackets; 12x Screws (for Brackets); 2x Key

Consoles available with German, French and US-american keyboard layout, others on request.

233657 / DC-71301GE
19" console, 15" TFT with 4-port KVM, german keyboard

233688 / DC-71302GE
19" console, 15" TFT with 8-port KVM, german keyboard

233718 / DC-71401GE
19" console, 15" TFT with 16-port KVM, german keyboard

DIGITUS® 19" console with 17" TFT

- Non reflective and break-proof 17'' LCD monitor
- Active Matrix LCD Panel
- Max. resolution: 1280x1024 pixels at 60Hz, Cl.II
- VGA/SVGA/XGA/SXGA Display Mode 16.2 Mio. colors
- Contrast rate 500:1, Brightness 300cd/m², response time 8ms
- Audio Speaker support (1x 3.5mm Stereo Plug)
- Requires no additional software or hardware
- Space saving steel sheet housing (1U height), black RAL 9005
- Dimensions (WxDxH): 447x600x48mm; Weight: 13.2kg
- Package content: 1x LCD Console, 1x USER Manual, 1x Power Cord, 2x Rack-Mount Brackets; 12x Screws (for Brackets); 2x Key

Consoles also available with other keyboard layouts on request.

233749 / DC-72101GE
19" console 17" TFT, german keyboard

233763 / DC-72101US
19" console 17" TFT, US-keyboard

233756 / DC-72101FR
19" console 17" TFT, french keyboard

DIGITUS® 19" console with 17" TFT and 4-/8-/ or 16-port KVM switch

- 19" Control Panel with 17" TFT, keyboard, touchpad and built-in KVM switch
- Control up to 256 computers by cascading KVM
- PC selection via push button on front panel, hot key, mouse clicking or through OSD menue
- Monitors PC status by Auto Scan function
- Non reflective and break-proof 17'' LCD monitor
- Active Matrix LCD Panel
- Max. resolution: 1280x1024 pixels at 75Hz, Cl.II, and supports EDID & DDC2 of each PC
- VGA/SVGA/XGA/SXGA Display Mode 16.2 Mio. colors
- Contrast rate 500:1, Brightness 300cd/m², response time 8ms
- Requires no additional software or hardware
- Space saving steel sheet housing (1U height), black RAL 9005
- Dimensions (WxDxH): 447x600x48mm; Weight: 13.3 / 13.35 / 13.4kg
- Package content: 1x LCD Console with integrated KVM, 1x USER Manual, 1x Power Cord, 1x Firmware Upgrade cable; 2x Rack-Mount Brackets; 12x Screws (for Brackets); 2x Key

Consoles available with German, French and US-american keyboard layout, others on request.

233770 / DC-72301GE
19" console, 17" TFT with 4-port KVM, german keyboard

233817 / DC-72302GE
19" console, 17" TFT with 8-port KVM, german keyboard

233848 / DC-72401GE
19" console, 17" TFT with 16-port KVM, german keyboard

DIGITUS® Blister Printer Connection cable, serial, premium

D-Sub 9-pin jack <> D-Sub 25-pin plug
molded housing, 8-wire cable, single shielded, AWG28, plug color: black/grey, cable color: black, in blisterpackage

234586 / DB-229322
3,0m

DIGITUS® Blister Serial Extension cable, premium

D-Sub 9-pin plug <> D-Sub 9-pin jack
molded housing, 9-wire cable, single shielded, AWG28, assignment 1:1, plug color: black/grey, cable color: black, in blisterpackage

234791 / DB-229414
2,0m

234814 / DB-229421
3,0m

234838 / DB-229438
5,0m

234852 / DB-229452
10,0m

DIGITUS® Blister PS/2 Extension cable, premium

MiniDIN 6-pin plug <> MiniDIN 6-pin jack
molded housing, 6-wire cable, single shielded, AWG28, assignment 1:1, plug color: black/grey, cable color: black, in blisterpackage

234982 / DB-229513
2,0m

234999 / DB-229520
5,0m

DIGITUS® Blister HDMI Connection cable, premium

For digital video / audio transmission
Resolution: 1920x1080 pixel -> 1080p; HDTV
HDMI type A plug (19-pin) <> HDMI type A plug (19-pin)
molded housing, 19-wire cable, double shielded, UL20276, gold plated, HDMI 1.3 compatible, plug color: black/grey, cable color: black, in blisterpackage

241775 / DB-241393
1,0m

235088 / DB-229568
2,0m

235101 / DB-229575
3,0m

235125 / DB-229582
5,0m

235149 / DB-229599
10,0m

DIGITUS® Blister HDMI - DVI Connection cable, premium

Digital connection cable HDMI to DVI (Single-Link) for video transmission. The cable is fit for 1080P.
HDMI type A plug (19-pin) <> DVI-D (18+1) plug
molded housing, 19-wire cable, double shielded, AWG30, UL20276, gold plated. plug color: black/grey, cable color: black, in blisterpackage

235163 / DB-229605
2,0m

235187 / DB-229612
3,0m

235200 / DB-229629
5,0m

235224 / DB-229636
10,0m

DIGITUS® Blister DVI-D Connection cable, premium

Digital connection cable DVI (Dual-Link) for video transmission. The cable is fit for 1080P.
DVI-D (24+1) plug <> DVI-D (24+1) plug
molded housing, cable full connected, double shielded, AWG28, 2x ferrite filter, UL20276, plug color: black/grey, cable color: black, in blisterpackage

235385 / DB-229780
2,0m

237082 / DB-229797
3,0m

237099 / DB-229803
5,0m

DIGITUS® Blister DVI-I - RCA Connection cable, premium

Analog connection cable DVI (Dual-Link) to 3x RCA (RGB) for video transmission. Especially suited to connect a video projector.
DVI-I (24+5) plug <> 3x RCA (RGB) plug
molded housing, 6-wire cable, shielded, AWG28, UL2919, plug olour: black/grey, cable color: black, in blisterpackage

235682 / DB-229940
1,8m

235699 / DB-229957
3,0m

235705 / DB-229964
5,0m

DIGITUS® Blister VGA Monitor connection cable, premium

HD D-Sub 15-pin plug <> HD D-Sub 15-pin plug
molded housing, 14-wire cable, shielded, AWG28, plug color: black/grey, cable color: black, in blisterpackage

235743 / DB-229971
1,8m

235750 / DB-229988
3,0m

235767 / DB-229995
5,0m

DIGITUS® Blister XGA Monitor extension cable, premium

HD D-Sub 15-pin plug <> HD D-Sub 15-pin jack
molded housing, 3x coax for RGB and 7x AWG28 signal wires, double shielded, 2x ferrite filter, UL2919, plug color: black/grey, cable color: black, in blisterpackage

236115 / DB-230175
1,8m

236122 / DB-230182
3,0m

236139 / DB-230205
5,0m

236146 / DB-230212
10,0m

All Premium cables also available in DIGITUS® Polybag.

DIGITUS® Blister USB Connection cable, A to B, premium

USB A plug <> USB B plug
molded housing, 4-wire cable, double shielded, 2x AWG24, 2x AWG28, UL2725, plug color: black/grey, cable color: black, in blisterpackage

236214 / DB-230250
1,0m
236221 / DB-230267
1,8m
236238 / DB-230274
3,0m
236245 / DB-230281
5,0m

DIGITUS® Blister USB Extension cable, A to A, premium

USB A plug <> USB A jack
molded housing, 4-wire cable, double shielded, 2x AWG24, 2x AWG28, UL2725, plug color: black/grey, cable color: black, in Blisterpackage

236252 / DB-230298
1,8m
236290 / DB-230304
3,0m
236306 / DB-230311
5,0m

DIGITUS® Blister FireWire IEEE 1394A Connection cable, premium

1394A 4pin plug <> 1394A 6pin plug
molded housing, 4-wire cable, double shielded, AWG28, UL20276 and IEEE 1394A compatible, the maximum data transfer rate is 400 Mbps, plug color: black/grey, cable color: black, in blisterpackage

236924 / DB-230564
1,0m
236931 / DB-230571
1,8m
236948 / DB-230588
3,0m
236955 / DB-230595
5,0m

DIGITUS® Blister External eSATA Connection cable, premium

The cable provides a safe connection between PC and HDD-enclosure.
eSATA plug <> eSATA plug
compatible with Serial ATA standard, molded housing, 7-wire cable, double shielded, AWG26, 4x Data wires, 3x earthing wires, UL2725, suitable for data transfer up to 300 MB/s, plug color: black/grey, cable color: black, in blisterpackage

237044 / DB-230632
0,75m
237051 / DB-230649
1,0m
237068 / DB-230656
1,5m

DIGITUS® Blister Audio Extension cable, stereo

3.5mm stereo plug <=> 3.5mm stereo jack
- molded housing
- cable CCS, shielded
- colour: black
- in Blisterpackage

078869 / DB-062943
3,0m

DIGITUS® Blister Audio Adapter cable, stereo

3.5mm stereo plug <=> 2x RCA plug
- molded housing
- cable CCS, shielded
- RCA plug colour: white/red
- 3.5 plug colour: black
- cable colour: black
- in blisterpackage

118961 / DB-109891
1,5m
078845 / DB-062981
2,0m
118985 / DB-110224
2,5m
119005 / DB-110231
5,0m
134503 / DB-003977
10,0m

DIGITUS® USB to serial adapter, USB 1.1 & USB 2.0

Compliant with USB 1.1 standard, Supports RS 232 serial interface, Maximum data transfer rate of over 1Mbps, Can be used for PDA and modems, USB extension cable also supplied / approx. 80cm long, Support for following operating systems: Windows® 98/2000/XP/Vista/ Linux and Mac OS V8.6, Chipset: PROLIFIC PL-2303HX

170419 / DA-70145
USB to serial adapter, USB 1.1
170426 / DA-70146
USB to serial adapter, USB 2.0

DIGITUS® Blister HDMI - DVI Adapter

DB-171706 = HDMI type A (19--pin) plug -> DVI-D (24+1) jack
DB-192565 = HDMI type A (19--pin) plug -> DVI-D (24+1) plug

- Molded housing
- color: black
- in blisterpackage

172512 / DB-171706
197294 / DB-192565

DIGITUS® Blister DVI-I - VGA Adapter

DB-083672 = DVI-I (24+5) plug <=> HD D-Sub 15-pin jack
DB-083689 = DVI-I (24+5) jack <=> HD D-Sub 15-pin plug

- moulded housing
- jack with clip interlocking
- color: black
- in blisterpackage

119289 / DB-083672
119302 / DB-083689

All Premium cables also available in DIGITUS® Polybag.

DIGITUS®

Enjoy connections. Live.

Please find the complete DIGITUS® assortment of high quality computer and network accessories online at:

www.digitus.info

Offer subject to change. All Information provided without guarantee. Subject to error and technical changes. Delivery only while supplies last. We accept no liability for printing errors. DIGITUS® ist a registered trademark.

DM-30119